



SHEET OF

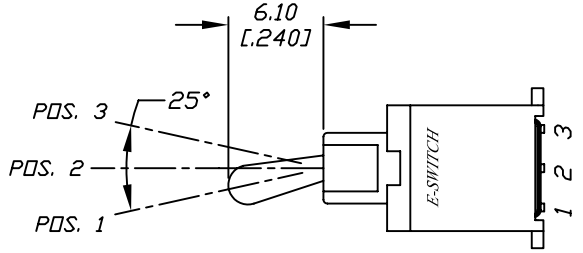

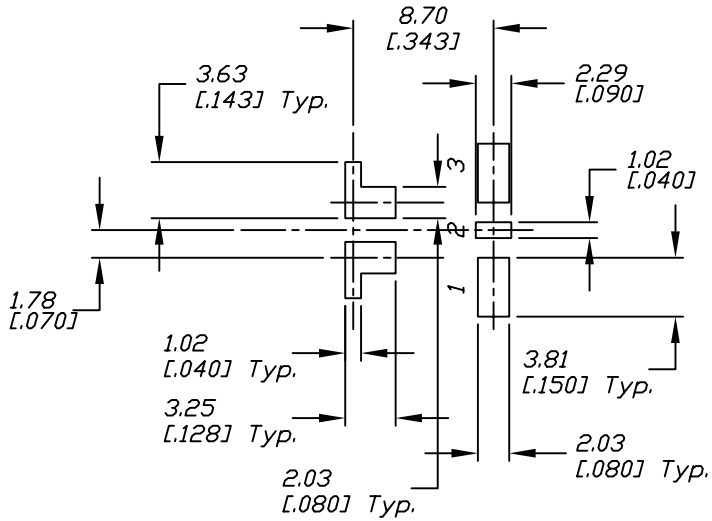

RECOMMEND MOUNTING LAYOUT

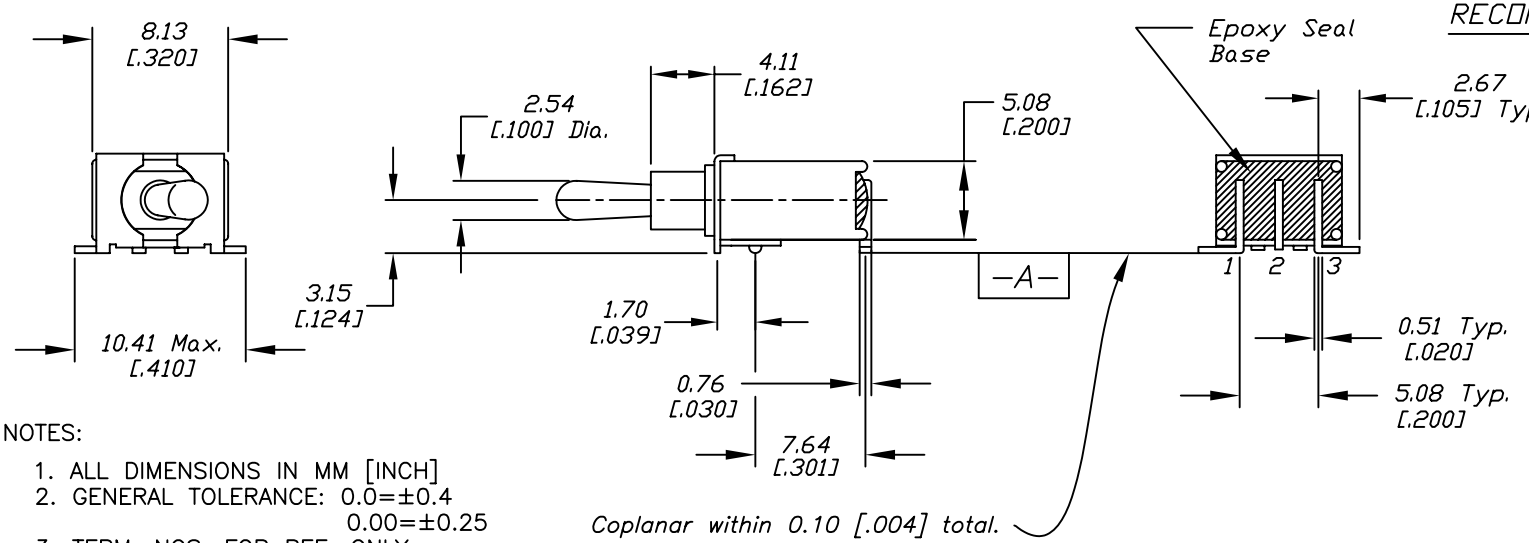



CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	N/A	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
   0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4 VA max. @20 VAC or DC max.
5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/Au plate over Ni plate.
6. ELECTRICAL LIFE: 50,000 make–and–break cycle at full load.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: –30°C to 85°C
9. 2002/95/EC (ROHS) COMPLIANT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
D	16058	UPDATE DIMENSIONS	5/30/06	CT
C	15989	UPDATE DIMENSIONS	4/26/06	CT
B	11201	DIMENSION ADDED	1/26/01	CJB
A	10259	RELEASED FOR PRODUCTION	6-29-99	MM

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 200B WMSP-1 T2 A1 SM6 R E

SCALE	DATE	DR	DWG	REV
2:1	6/29/99	MM	T833017	D