

NF2000A-UP Series (RoHS Compliant)

Single-phase 2-line



General-purpose, Plastic housing



UL1283/CSA C22.2 No8(C-UL) (file No.E102708) EN60939-2 (file No.R50111480)

Applications


General-purpose, Plastic housing

Specifications


Part No.	Rated Current	Weight
NF2006A-UP	6A	0.3kg
NF2010A-UP	10A	0.3kg
NF2016A-UP	16A	0.3kg
NF2020A-UP	20A	0.3kg
NF2030A-UP	30A	0.3kg


Rated Voltage	250VAC
Leakage Current	0.6mA max 250VAC 60Hz By UL1283


fig.1



NO	Part name
1	Input terminal(M4)
2	Case
3	Name plate
4	Output terminal(M4)
5	Earth terminal(M4)

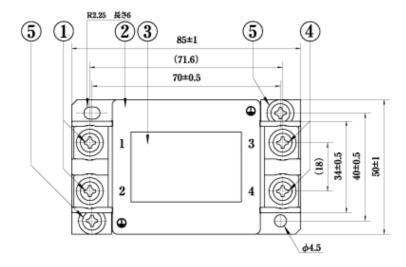



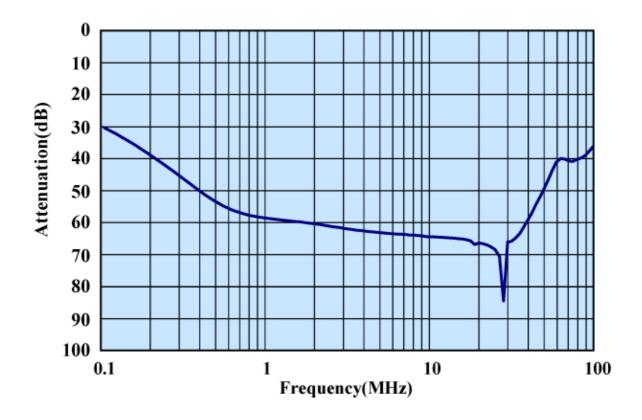

Circuit Diagram

