


| REV. | DESCRIPTION                                | DATE     | APPROVED |
|------|--------------------------------------------|----------|----------|
| #1   | RELEASED FOR DEVELOPMENT DPK               | 11/19/97 | SWN      |
| #2   | ADDED ±.010 TOL TO DIM DPK                 | 12/8/97  | SWN      |
| #3   | .49 WAS .490: REMOVED P/N STAMPING DPK     | 8/24/98  | SWN      |
| #4   | 1.47 WAS 1.470 DPK                         | 9/2/98   | SWN      |
| #5   | .40 WAS .400: ADDED 'O' TO .100 & .190 DPK | 9/11/98  | SWN      |
| #6   | ADDED NOTE 4, CRITICAL CHA.'O' AK          | 10/5/99  | SWN      |

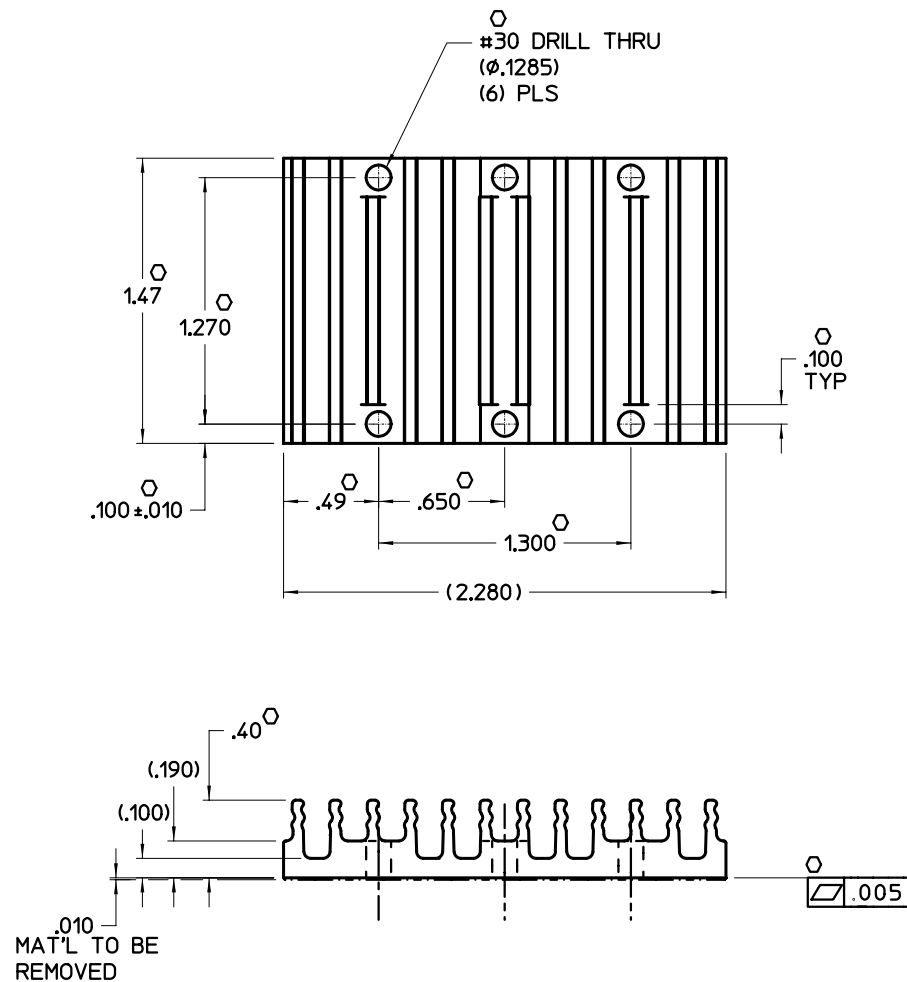

#### NOTES

1. MAKE FROM VICOR EXTRUSION P/N 16296.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINISH. CLEAR CHROMATE.
4. 'O' DENOTES CRITICAL CHARACTERISTICS FOR LOT INSPECTION.

|                                                                                                                         |                 |                                               |           |
|-------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------------|-----------|
| DRAWN BY<br>D.P. KELLY                                                                                                  | DATE<br>11/97   | VICOR                                         |           |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES.<br>TOLERANCES ARE:<br>FRACTIONS DECIMALS ANGLES<br>1/16 ±.01 1° |                 | HTSNK, "C" X-FLOW, .4H<br>LOW FLOW, THRU HOLE |           |
| THIRD ANGLE PROJECTION                                                                                                  | SIZE<br>C 67131 | DWG NO<br>18074                               | REV<br>#6 |
| DO NOT SCALE DRAWING                                                                                                    | SCALE 2-1       | SHEET 1 OF 1                                  |           |