




Clock Oscillators Surface Mount Type KC7050G-P3 Series Dual Selectable



LV-PECL/ 3.3V/ 7.0x5.0mm

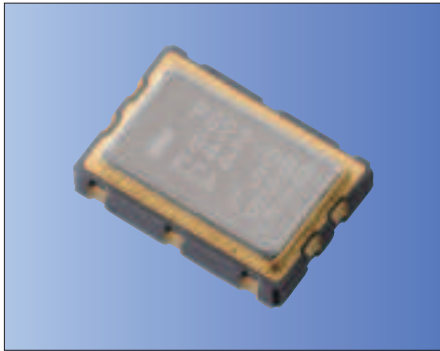

RoHS Compliant

Features

- High frequency to 900MHz
- Dual frequency selectable
- LV-PECL output
- Miniature ceramic package
- Highly reliable with seam welding
- for WDM, Networking Applications

Table 1

Freq. Tol. Code	Tol. $\times 10^{-6}$	Operating Temperature Range (°C)	Note
G	± 50	-40 to +85	Please contact us for available frequencies.

How to Order

KC7050G 622A644 P 3 G D 00
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Output Frequency/ Selection Frequency
- ③ Output Type (LV-PECL)
- ④ Supply Voltage (3.3V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%, Disable)
- ⑦ Individual Specification (STD Specification is "00")

Packaging (Tape & Reel 1000 pcs./ reel)

Specifications

Item	Symbol	Conditions	Min.	Max.	Units
Output Frequency Range ^{Note1}	f1	Primary Output/ #2 "H"-Level or Open	10	900	MHz
	f2	Secondary Output/ #2 "L"-Level	10	900	MHz
Frequency Tolerance	f_tol	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration Op. Temp.: -40 to +85°C	-50	+50	$\times 10^{-6}$
Storage Temperature Range	T_stg		-55	+125	°C
Operating Temperature Range	T_use		-40	+85	°C
Max. Supply Voltage	—		-0.5	+4.2	V
Supply Voltage	V _{CC}		+2.97	+3.63	V
Current Consumption	I _{CC}		—	100	mA
Symmetry	SYM	50ohm @crossing point	45	55	%
Rise/ Fall Time (20% to 80% Output Level)	tr/ tf	50ohm	—	0.4	ns
Low Level Output Voltage ^{Note2}	V _{OL}		—	V _{CC} -1.620	V
High Level Output Voltage ^{Note2}	V _{OH}		V _{CC} -1.025	—	V
Output Load	—	LV-PECL Output	50		ohm
Low Level Input Voltage	V _{IL}		—	30% V _{CC}	V
High Level Input Voltage	V _{IH}		70% V _{CC}	—	V
Start-up Time	t _{str}	@Minimum operating voltage to be 0 sec.	—	10	ms
Phase Jitter	J _{Phase}	@622.08MHz	BW : 12kHz to 20MHz		ps
Phase Noise	—	@622.08MHz	@10Hz offset		dBc/ Hz
			Typ. -40		
			@100Hz offset		
			Typ. -70		
			@1kHz offset		
			Typ. -95		
			@10kHz offset		
Typ. -105					
@100kHz offset					
Typ. -105					
@1MHz offset					
Typ. -125					
@10MHz offset					
Typ. -135					


Note : All electrical characteristics are defined at the maximum load and operating temperature range.

Note1: Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

Note2: DC characteristic

Dimensions

(Unit: mm)

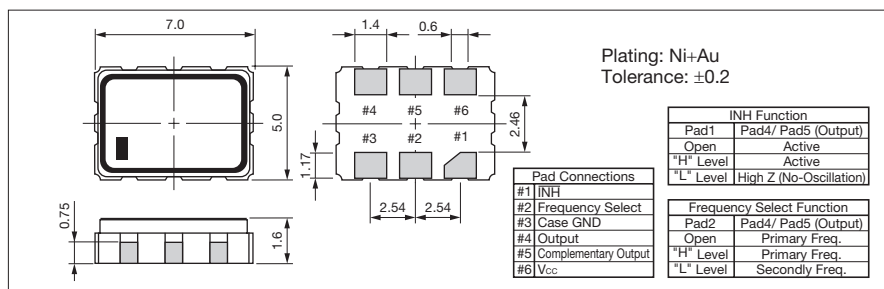

Recommended Land Pattern

(Unit: mm)

