



**1. Mechanical Dimensions:**

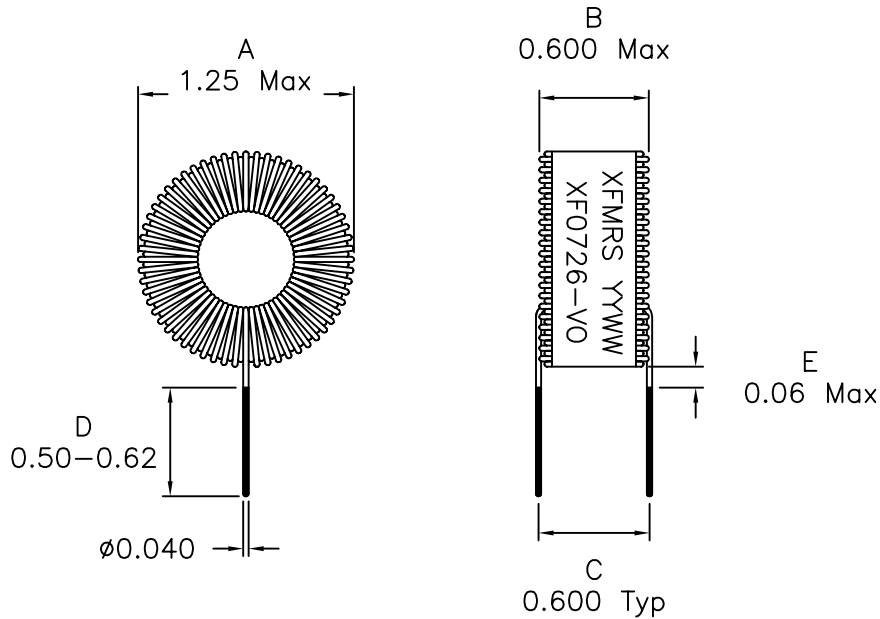

**2. Schematic:**



**3. Electrical Specifications: @25°C**

Inductance: 72uH±15% @10KHz 0.1V, 0Adc  
 Inductance: 68uH Typ @10KHz 0.1V, 5Adc  
 DC Resistance: 0.036 Ohms Max

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC REV: A/1

<b>XFMRS Inc.</b>	Title: Toroid Inductor		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF0726-VO	REV. A
	DWN.	廖玉坤	Apr-4-03
	CHK.	李清儿	Apr-4-03
	APP.	BW	Apr-4-03