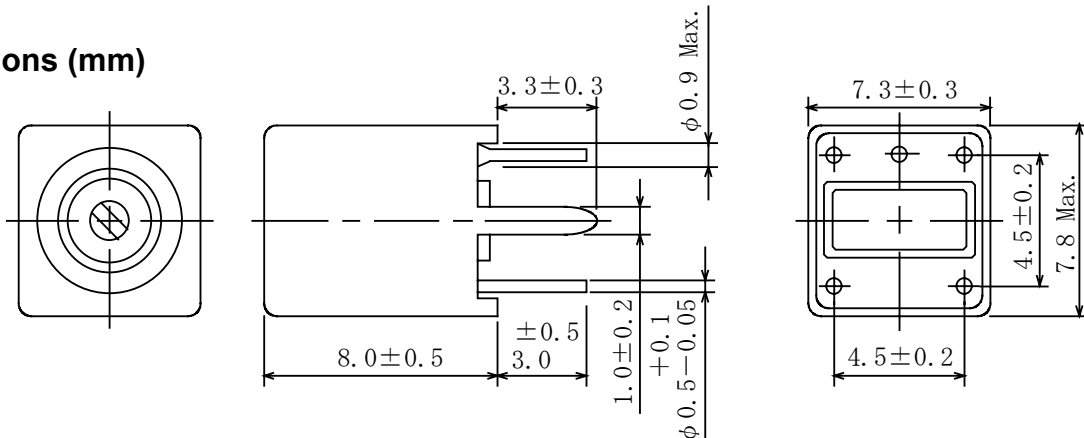


Type: S-7LC
◆ Product Description


- 7.8×7.6mm Max.(L×W), 8.5mm Max. Height.
- Inductance:0.1~10 μ H Max.
- Operating frequency:300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.


◆ Feature

- Variable shielded type.
- Internally assembled condenser is available.
- RoHS Compliance

◆ Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.

◆ Connection (Bottom View)


“S” is winding start.

◆ Specification (Part No. 2299-T197)

Item	(1-3)	Measuring conditions
Frequency	49.3MHz±1% Variable	
Unloaded Qu	35 Min.	49.3MHz
Capacity(Int.)	39pF±10%	
Ext. Stray Capacity 33pF Between (1-3) when Measuring.		