
GAAH40

Press Fit Avalanche Automotive Rectifier (HITACHI)
Avalanche Voltage 24 to 32Volts Current 40 Amps

Technical Specification:

Features:

- High power capability
- Economical
- Avalanche Voltage: 24V to 32V

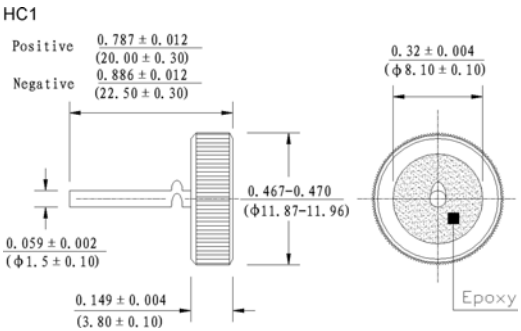

Dimensions in inches and (millimeters)

Mechanical Data:

- Case: Copper case
- Epoxy: UL94-0 rate flame ratardant
- Polarity: As marked of case bottom
- Glass passivated chip
- Technology vacuum soldered
- Lead: Plated lead, solderable per MIL-STD-202E method 208C
- Weight: 0.11 ounces, 3.15 grams


■Maximum Ratings and Electrical Characteristics

- Rating at 25°C ambient temperature unless otherwise specified.
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%.

Electrical Characteristics @ 25°C	Symbols	Min.	Nominal	Max.	Units
Peak repetitive reverse voltage Working peak reverse voltage DC blocking voltage	V_{RRM} V_{RWM} V_{DC}		20 20 20		Volts
Average rectified forward current at T_C=125°C	I_O		40		Amps
Repetitive peak reverse surge current T_C=10msec duty cycle <1%	I_{FSM}		40		Amps
Breakdown voltage (V_{br}@ I_F=100mA, T_C=25°C) I_F=90Amps, T_C=150°C, PW=80usec	V_{br1} V_{br2}	24	25/27	32 40	Volts
Forward voltage drop (V_{fm})@ I_F=100Amps<300usec	V_F	0.98	1.02	1.05	Volts
Peak forward surge current	I_{FSM}		500		Ampes
Reverse leakage (V_R=20Vdc) T_A=25°C	I_R	0.2	1.0	2.0	uA
Operating junction and storage temperature range	T_J, T_{STG}		-65 to +175		°C

Notes: 1. Enough heatsink must be considered in application.

Fig.1

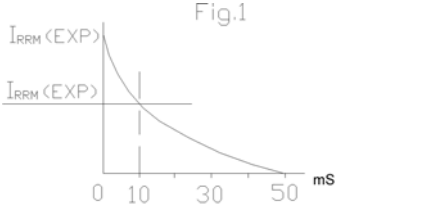

Surge current characteristics