

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0687690028

Status:

Active

Overview:

ieee_1394

Description:

IEEE 1394B Beta 9-pin-to-9-pin Cable Assembly, 2.0m (6.56') Length

Documents:

Drawing (PDF)

Product Specification PS-68769-001 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Series

Connector to Connector

Overview

Product Name

Cable Assemblies

68769

IEEE1394b-2002 Both Ends

ieee_1394

IEEE 1394

Physical

Cable Length

Circuits (Loaded)

Color - Resin

Gender

Lock to Mating Part

Material - Resin

Packaging Type

Single Ended

Wire Insulation Diameter

Wire Size AWG

Wire/Cable Type

2.0m (6.56')

9

Natural

Male-Male

Yes

Low Density Polyethylene

Bag

No

N/A

N/A

Round

Electrical

Current - Maximum per Contact

Impedance

Shielded

Voltage - Maximum

1.5A

110 ohms

Yes

30V

Material Info


Reference - Drawing Numbers

Product Specification

Sales Drawing

PS-68769-001

SD-68769-028

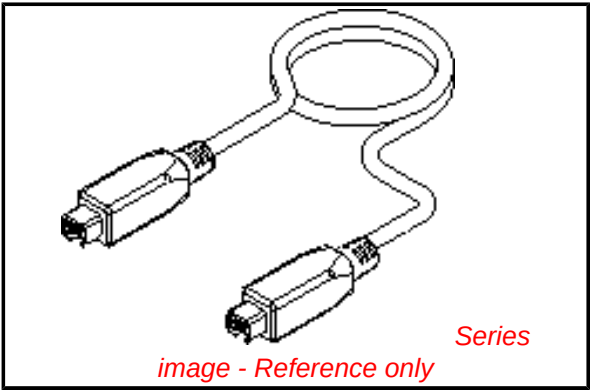

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.


Search Parts in this Series

68769Series

Mates With

44647 IEEE 1394b-2002 Shielded I/O PCB Bilingual Socket

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

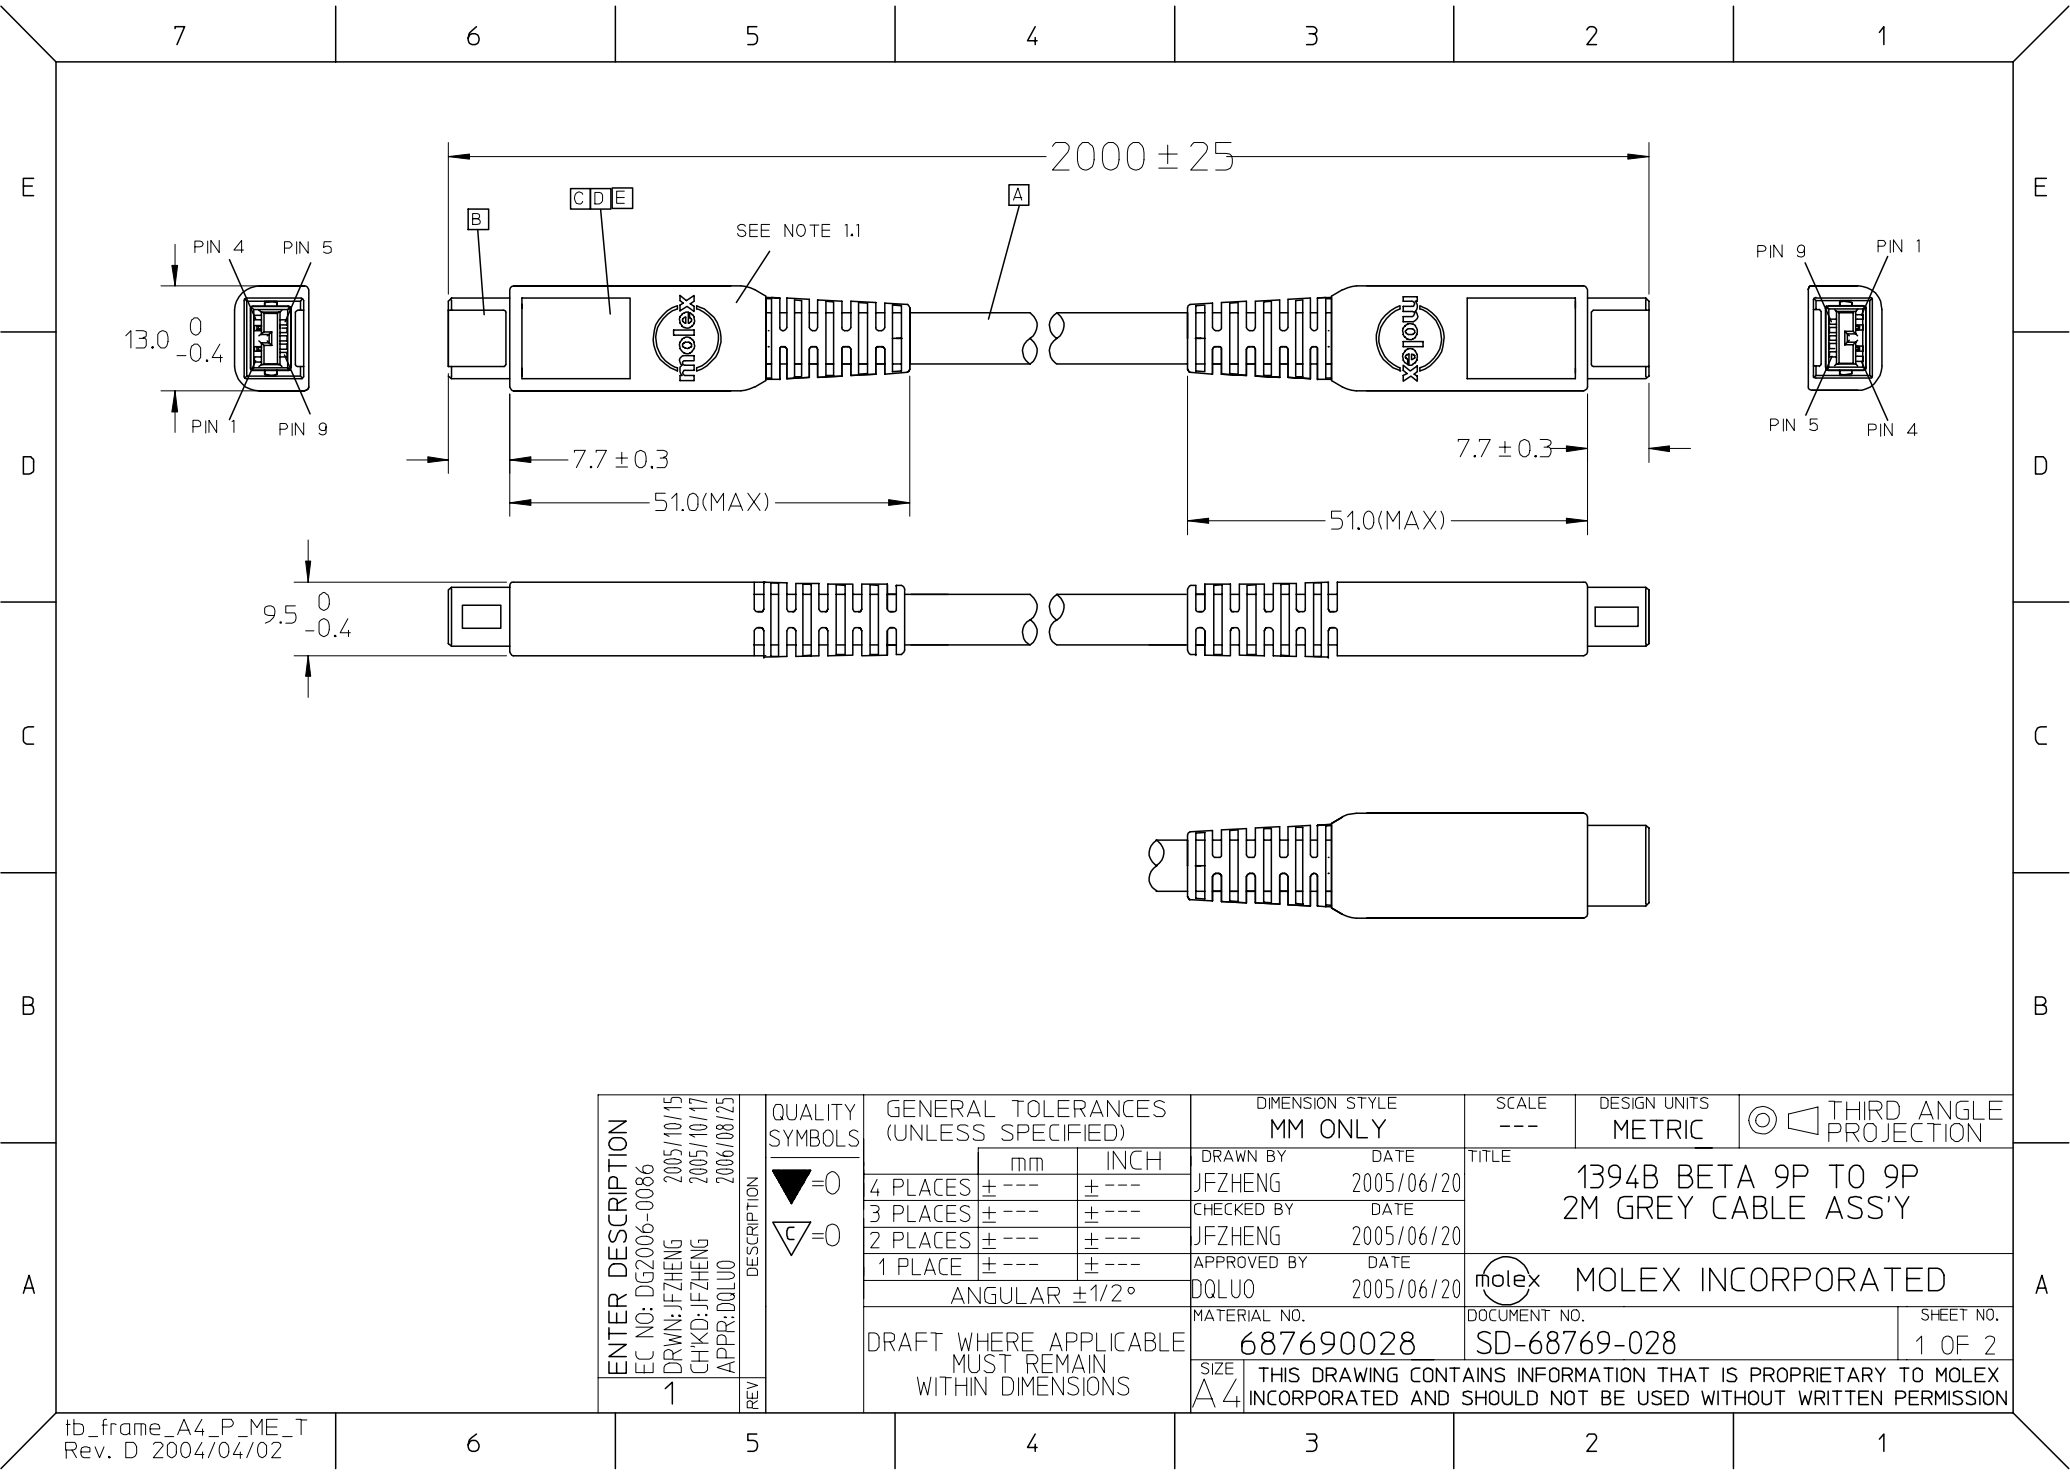

ENTER DESCRIPTION EC NO: DG2006-0086 DRWN: JFZHENG CHKD: JFZHENG APPR: DQLUO 1		DESCRIPTION REV	QUALITY SYMBOLS <div>▽=0</div> <div>▽C=0</div>	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
					mm	INCH	DRAWN BY JFZHENG	DATE 2005/06/20	TITLE 1394B BETA 9P TO 9P 2M GREY CABLE ASS'Y					
				4 PLACES	± ---	± ---	CHECKED BY JFZHENG	DATE 2005/06/20						
				3 PLACES	± ---	± ---	APPROVED BY DQLUO		DATE 2005/06/20	MOLEX INCORPORATED				
				2 PLACES	± ---	± ---								
				1 PLACE	± ---	± ---	DOCUMENT NO. SD-68769-028							
				ANGULAR ±1/2°										
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. 687690028		SHEET NO. 1 OF 2					
			SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

7	6	5	4	3	2	1																																																								
E	WIRING DIAGRAM:			NOTE: 1.OVERMOLD SPECIFICATION 1.1 INNER MOLD WITH PE RESIN 887800008 1.2 OVERMOLD MOLDED WITH GREY PVC RESIN.887800152 2.CONNECTOR NEED TO BE 360 DEG. SOLDERING.																																																										
D	MATERIAL LIST:																																																													
<table><tr><td>E</td><td>1394B SOLDER I/O CONN. 172000528</td><td></td><td>2</td></tr><tr><td>D</td><td>1394B REAR SHELL:172000530</td><td></td><td>2</td></tr><tr><td>C</td><td>1394B FRONT SHELL:172000529</td><td></td><td>2</td></tr><tr><td>B</td><td>1394 9PIN BETA PLUG 172000532</td><td></td><td>2</td></tr><tr><td>A</td><td>2P*30+2C*26+SHLD:PVC:GY:5.50MM:IEEE1394b:887808510</td><td>2M Ref.</td><td>1</td></tr><tr><td>ITEM</td><td>DESCRIPTION</td><td>L</td><td>QTY.</td></tr></table>							E	1394B SOLDER I/O CONN. 172000528		2	D	1394B REAR SHELL:172000530		2	C	1394B FRONT SHELL:172000529		2	B	1394 9PIN BETA PLUG 172000532		2	A	2P*30+2C*26+SHLD:PVC:GY:5.50MM:IEEE1394b:887808510	2M Ref.	1	ITEM	DESCRIPTION	L	QTY.																																
E	1394B SOLDER I/O CONN. 172000528		2																																																											
D	1394B REAR SHELL:172000530		2																																																											
C	1394B FRONT SHELL:172000529		2																																																											
B	1394 9PIN BETA PLUG 172000532		2																																																											
A	2P*30+2C*26+SHLD:PVC:GY:5.50MM:IEEE1394b:887808510	2M Ref.	1																																																											
ITEM	DESCRIPTION	L	QTY.																																																											
C	PIN OUT TABLE																																																													
<table><tr><th>Plug1: Beta plug contact number</th><th>Signal name at plug 1 endcable as difined in this standard</th><th>Plug2: Beta plug contact number</th></tr><tr><td>1</td><td>TPB*(Twisted pair B Minus) (RED)</td><td>3</td></tr><tr><td>2</td><td>TPB(Twisted pair B Plus) GREEN</td><td>4</td></tr><tr><td>3</td><td>TPA*(Twisted Pair A minus) (LBUE)</td><td>1</td></tr><tr><td>4</td><td>TPA(Twisted pair A Plus) (ORGANGE)</td><td>2</td></tr><tr><td>5</td><td>TPA(R)(Twisted Pair A Ground Rederence)</td><td>9</td></tr><tr><td>6</td><td>VG(Power Ground) (BLACK)</td><td>6</td></tr><tr><td>7(no connection)</td><td>NO connection</td><td>7(no connection)</td></tr><tr><td>8</td><td>Vp(Power Voltage) (WHITE)</td><td>8</td></tr><tr><td>9</td><td>TPB(R)(Twisted Pair B Ground Reference)</td><td>5</td></tr><tr><td>plug shield</td><td>Cable Shield Ground</td><td>Plug shield</td></tr></table>							Plug1: Beta plug contact number	Signal name at plug 1 endcable as difined in this standard	Plug2: Beta plug contact number	1	TPB*(Twisted pair B Minus) (RED)	3	2	TPB(Twisted pair B Plus) GREEN	4	3	TPA*(Twisted Pair A minus) (LBUE)	1	4	TPA(Twisted pair A Plus) (ORGANGE)	2	5	TPA(R)(Twisted Pair A Ground Rederence)	9	6	VG(Power Ground) (BLACK)	6	7(no connection)	NO connection	7(no connection)	8	Vp(Power Voltage) (WHITE)	8	9	TPB(R)(Twisted Pair B Ground Reference)	5	plug shield	Cable Shield Ground	Plug shield																							
Plug1: Beta plug contact number	Signal name at plug 1 endcable as difined in this standard	Plug2: Beta plug contact number																																																												
1	TPB*(Twisted pair B Minus) (RED)	3																																																												
2	TPB(Twisted pair B Plus) GREEN	4																																																												
3	TPA*(Twisted Pair A minus) (LBUE)	1																																																												
4	TPA(Twisted pair A Plus) (ORGANGE)	2																																																												
5	TPA(R)(Twisted Pair A Ground Rederence)	9																																																												
6	VG(Power Ground) (BLACK)	6																																																												
7(no connection)	NO connection	7(no connection)																																																												
8	Vp(Power Voltage) (WHITE)	8																																																												
9	TPB(R)(Twisted Pair B Ground Reference)	5																																																												
plug shield	Cable Shield Ground	Plug shield																																																												
B																																																														
A	<table><tr><td rowspan="5">ENTER DESCRIPTION EC NO: DG2006-0086 DRWN:JFZHENG 2005/10/15 CHKD:JFZHENG 2005/10/17 APPR:DQLUO 2006/08/25</td><td rowspan="5">QUALITY SYMBOLS ▽=0 ▽=0</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td>DIMENSION STYLE MM ONLY</td><td>SCALE ---</td><td>DESIGN UNITS METRIC</td><td>THIRD ANGLE PROJECTION</td></tr><tr><td></td><td>mm</td><td>INCH</td><td>DRAWN BY JFZHENG</td><td>DATE 2005/06/20</td><td colspan="3">TITLE 1394B BETA 9P TO 9P 2M GREY CABLE ASS'Y</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td><td>CHECKED BY JFZHENG</td><td>DATE 2005/06/20</td><td colspan="3">MOLEX INCORPORATED</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td><td>APPROVED BY DQLUO</td><td>DATE 2005/06/20</td><td colspan="3">MATERIAL NO. 68769-0028</td></tr><tr><td>2 PLACES</td><td>± ---</td><td>± ---</td><td>DOCUMENT NO. SD-68769-028</td><td colspan="3">SHEET NO. 2 OF 2</td></tr><tr><td>1 PLACE</td><td>± ---</td><td>± ---</td><td colspan="4">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="3">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr><tr><td colspan="2">ANGULAR ±1/2°</td><td colspan="5"></td></tr></table>						ENTER DESCRIPTION EC NO: DG2006-0086 DRWN:JFZHENG 2005/10/15 CHKD:JFZHENG 2005/10/17 APPR:DQLUO 2006/08/25	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		mm	INCH	DRAWN BY JFZHENG	DATE 2005/06/20	TITLE 1394B BETA 9P TO 9P 2M GREY CABLE ASS'Y			4 PLACES	± ---	± ---	CHECKED BY JFZHENG	DATE 2005/06/20	MOLEX INCORPORATED			3 PLACES	± ---	± ---	APPROVED BY DQLUO	DATE 2005/06/20	MATERIAL NO. 68769-0028			2 PLACES	± ---	± ---	DOCUMENT NO. SD-68769-028	SHEET NO. 2 OF 2			1 PLACE	± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			ANGULAR ±1/2°						
ENTER DESCRIPTION EC NO: DG2006-0086 DRWN:JFZHENG 2005/10/15 CHKD:JFZHENG 2005/10/17 APPR:DQLUO 2006/08/25	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE ---	DESIGN UNITS METRIC			THIRD ANGLE PROJECTION																																																					
			mm	INCH	DRAWN BY JFZHENG	DATE 2005/06/20			TITLE 1394B BETA 9P TO 9P 2M GREY CABLE ASS'Y																																																					
		4 PLACES	± ---	± ---	CHECKED BY JFZHENG	DATE 2005/06/20			MOLEX INCORPORATED																																																					
		3 PLACES	± ---	± ---	APPROVED BY DQLUO	DATE 2005/06/20			MATERIAL NO. 68769-0028																																																					
		2 PLACES	± ---	± ---	DOCUMENT NO. SD-68769-028	SHEET NO. 2 OF 2																																																								
1 PLACE	± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																							
ANGULAR ±1/2°																																																														
<table><tr><td>tb_frame_A4_P_ME_T Rev. D 2004/04/02</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td></tr></table>							tb_frame_A4_P_ME_T Rev. D 2004/04/02	6	5	4	3	2	1																																																	
tb_frame_A4_P_ME_T Rev. D 2004/04/02	6	5	4	3	2	1																																																								