
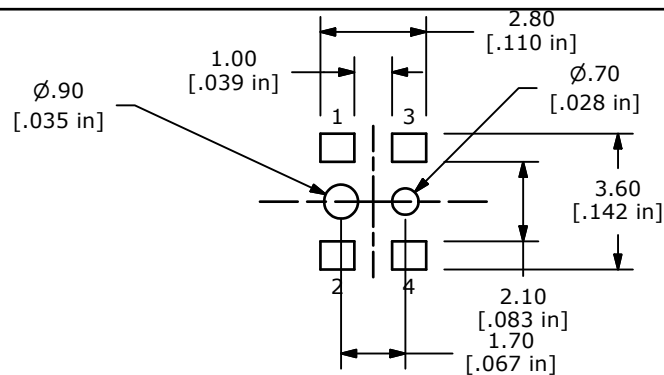


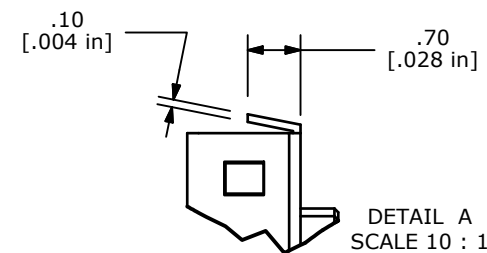
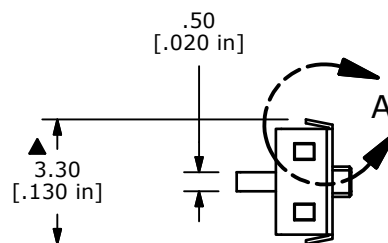


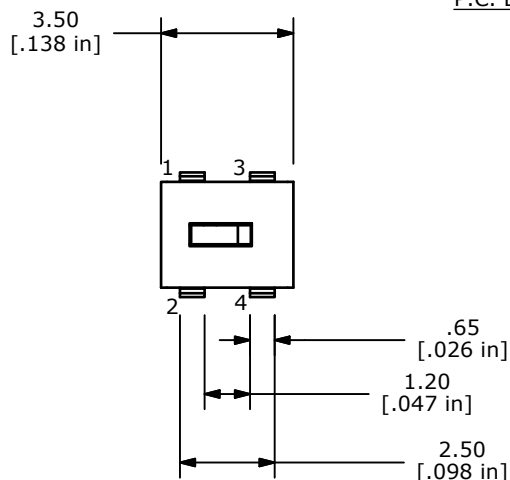

P.C. LAYOUT


▲ SCHEMATIC
N.O.

ISOMETRIC

DETAIL A
SCALE 10 : 1

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲4. RATING: 1mA @ 5VDC
- ▲5. OPERATING POINT = 2.20 mm
- ▲6. OPERATING FORCE: ≤ 50 gf
7. CONTACT RESISTANCE: 2 OHMS MAX. (INITIAL)
8. ELECTRICAL LIFE: 100,000 min.
9. INSULATION RESISTANCE: 100 MOHMS MIN @ 100VDC.
10. OPERATING TEMPERATURE: -10° C TO 60° C
11. DIELECTRIC STRENGTH: 100 VAC FOR 1 MINUTE.
12. PACKAGING: 2,600 PER REEL
13. ▲ DENOTES CRITICAL PARAMETER
14. 2002/95/EC (ROHS) COMPLIANT

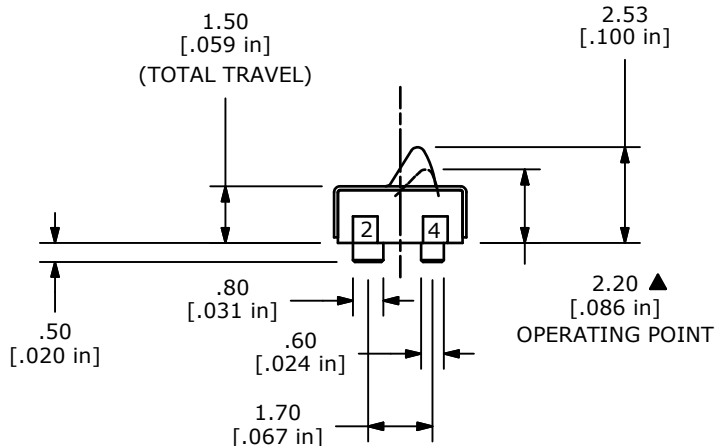

TITLE TD4700BQ

A	21286	New Release	10/28/13	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 5:1

DATE 9/27/2013

DR rc

DWG N470001

REV A