
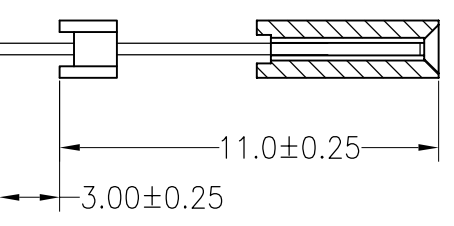
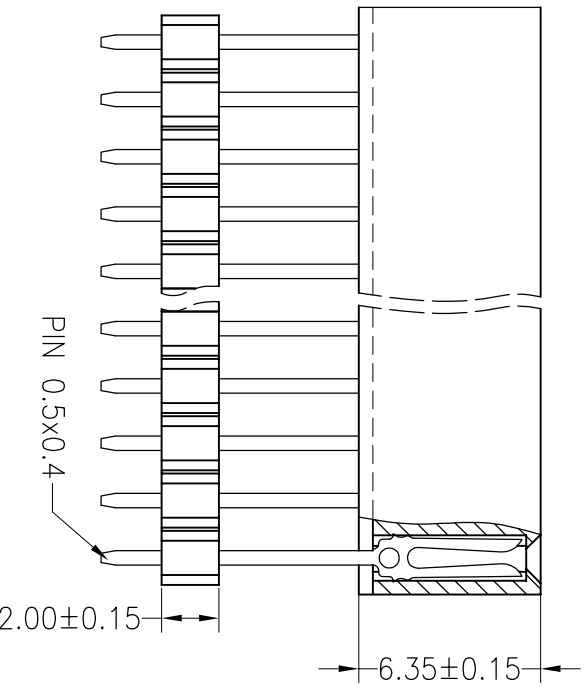
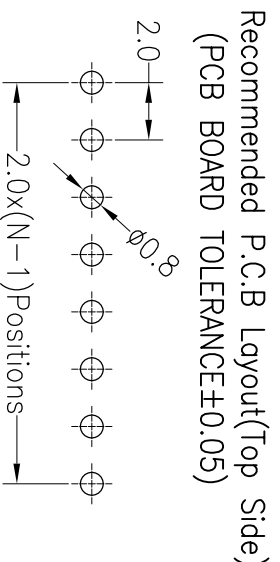


# RoHS

## SPECIFICATIONS

Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°c to +105°c

Contact Material: Brass  
 Contact Plating: Au Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

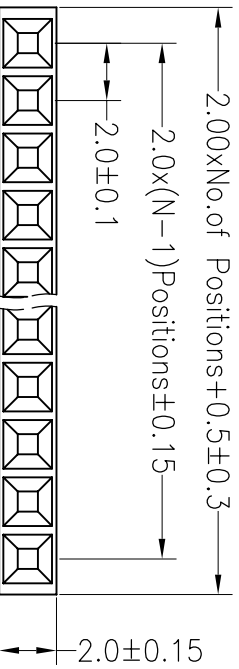

深圳市连盛精密连接器有限公司

PART NO. FH-00183---A0001

TITLE: 2.0FH 2H=6.35+2.0 1x5pin 180°

		OPERATION		DRAW		SCALE		FIT	
		X.X	±0.30			UNIT			
		X.XX	±0.20	CHECK		mm	A4		
		X.XXX	±0.10			SIZE			
		Angle	±3°	APPROVE		SHEET	1/1		
		DIM	TOL			PROJ.			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	
1			