

NOTES:

MATERIAL

1. Insulator Material: PA6T +30%GF (UL94V-0), Black

2. Contact Material : Brass

3. Contact Plating : Gold flash Over 50µ"Ni ELECTRICAL

1. Current Rating : 1.5AMP

2. Withstand Voltage : 500V AC/DC

3. Contact Resistance : 20mΩ max



4. Insulation Resistance: 1000MΩ min ENVIRONMENTAL

1. Operation Temperature: -40°C to +105°C


2. Packing: Tube

Order Information :

④ xx: 06, 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60

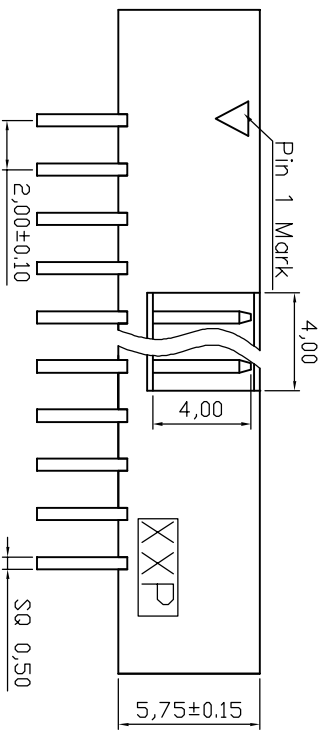

RoHS compliant
Unit: mm



Scale	Free									
TOLERANCE										
X.X	±0.40	⑤	Change of packing	25.02.2014	Amy	Drawn	25.01.2006	Alex	Customer-No.	
X.XX	±0.25	④	Add 06 poles version into the drawing	08.02.2014	Amy	Approved	25.02.2014	Amy	ASSMANN WSW-No.	AWHW2 XXA-0202
X.XXX	±0.15	③	Add UL-File No	12.12.2013	Winnie				Drawing-No.	ASS 2318 CO
Angle°	±3°	②	Update	29.06.2009	Dean				Replace	rev05
		①	Drawn	25.01.2006	Alex					Sheet
			Id							
			Modification							



1	2	3	4	5	6	7	
1	2	3	4	5	6	7	SV3505