

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0712510019

Status:

Active

Description:

1.27mm (.050") Pitch DIMM Socket, Vertical, Multiple Keys, Plastic Peg, 168 Circuits, 5.0V Standard DRAM

Documents:

3D Model

Drawing (PDF)

Product Specification PS-71243-9999 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

UL

LR19980

E29179

General

Product Family

Series

Comments

Component Type

JEDEC Outline

Product Name

Memory Module Sockets

71251

Function Key Center, Voltage Key Offset Left

Memory Module

MO-161

DIMM

Physical

Circuits (Loaded)

Circuits (maximum)

Durability (mating cycles max)

Entry Angle

Flammability

Function Key

Keying to Mating Part

Material - Plating Mating

PC Tail Length (in)

PC Tail Length (mm)

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Temperature Range - Operating

Termination Interface: Style

168

168

25

Vertical

94V-0

Center

Yes

Gold

0.127 In

3.23 mm

Yes

Yes

0.062 In

1.57 mm

Tray

0.050 In

1.27 mm

0.050 In

1.27 mm

-40°C to +85°C

Through Hole

Electrical

Current - Maximum per Contact

Voltage - Maximum

Voltage Key

1A

100V AC (RMS)/DC

Left

Solder Process Data

Lead-free Process Capability

Wave Capable (TH only)

Material Info


Reference - Drawing Numbers

Product Specification

Sales Drawing

PS-71243-9999

SDA-71251-0***

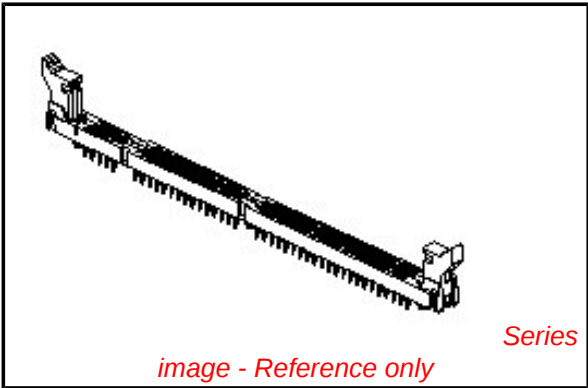

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

71251Series

Mates With

JEDEC MO-161 modules

This document was generated on 04/13/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

1. CARD SLOT ACCEPTS .050±.004 (1.27±0.10) MODULE THICKNESS.
(MEASURED OVER P.C. PADS).
2. ALL PEGS ARE INTERFERENCE FITS TO PCB UNLESS NOTED ON THE DWG.
3. REFER TO PRODUCT SPEC PS-71243-9999 FOR PERFORMANCE SPECIFICATIONS.
4. PRODUCT IS PACKAGED IN TRAYS.
5. RECOMMENDED MODULE LAYOUT SHALL BE PER JEDEC MO-161.
6. RECOMMENDED PLATING ON MODULE PADS: 30 MICROINCH/(0.76 MICROMETER) MINIMUM
HARD GOLD (Au) OVER 79 MICROINCH/(2.0 MICROMETER) MINIMUM NICKEL (Ni).
7. SEE CHART FOR HOLE SIZE AND PRESENCE AND PLATING OPTION.
8. PRODUCT WILL HAVE DATE CODE STAMPED ON SIDE OF HOUSING.

MATERIALS:

HOUSING - GLASS FILLED LIQUID CRYSTAL POLYMER (LCP), UL 94V-0, COLOR: BLACK.
 TERMINAL- PHOSPHOR BRONZE
 LATCHES - GLASS FILLED HIGH TEMPERATURE NYLON, UL 94V-0, COLOR: IVORY.



PLATING:

CONTACT AREA: OPTION A: GOLD (Au) FLASH: THICKNESS=2-10 MICROINCH/(0.05-0.25 (0.05-0.25 MICROMETER), OVER PALLADIUM-NICKEL (Pd-Ni): THICKNESS=30 MICROINCH/(0.76 MICROMETER) MINIMUM.
OPTION B: GOLD (Au) FLASH: THICKNESS=2-10 MICROINCH/(0.05-0.25 MICROMETER), OVER PALLADIUM-NICKEL (Pd-Ni): THICKNESS=20 MICROINCH/(0.51 MICROMETER) MINIMUM.

SOLDER TAILS: TIN (Sn): THICKNESS=150 MICROINCH/(3.81 MICROMETER) MINIMUM.
UNDERPLATE: NICKEL (Ni) OVER ENTIRE CONTACT.


NOTE FOR LEAD FREE CONVERSION:

THE PRIMARY SHIPPING CARTON WILL BE
 LABELED "COMPLIANT TO RoHS DIRECTIVE
 2002/95/EC AND ELV ANNEX II OF
 DIRECTIVE 2000/53/EC". CARTONS
 WITHOUT THIS LABEL MAY CONTAIN
 PRODUCT WITH LEAD.

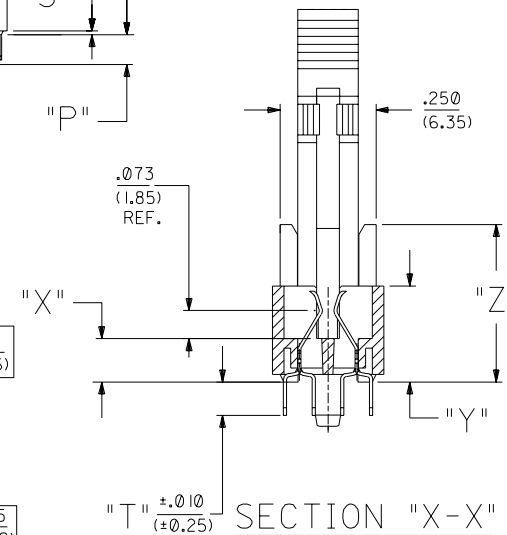

SCALE 4:1


			DI	ECR# U60361 9-18-95 JCL
	3	H		
	2	F3		REVISED PER ECR# U51288 8-4-95 JCL
	I	HI	D	
MFG.	SH.	REV.	LTR.	REVISIONS

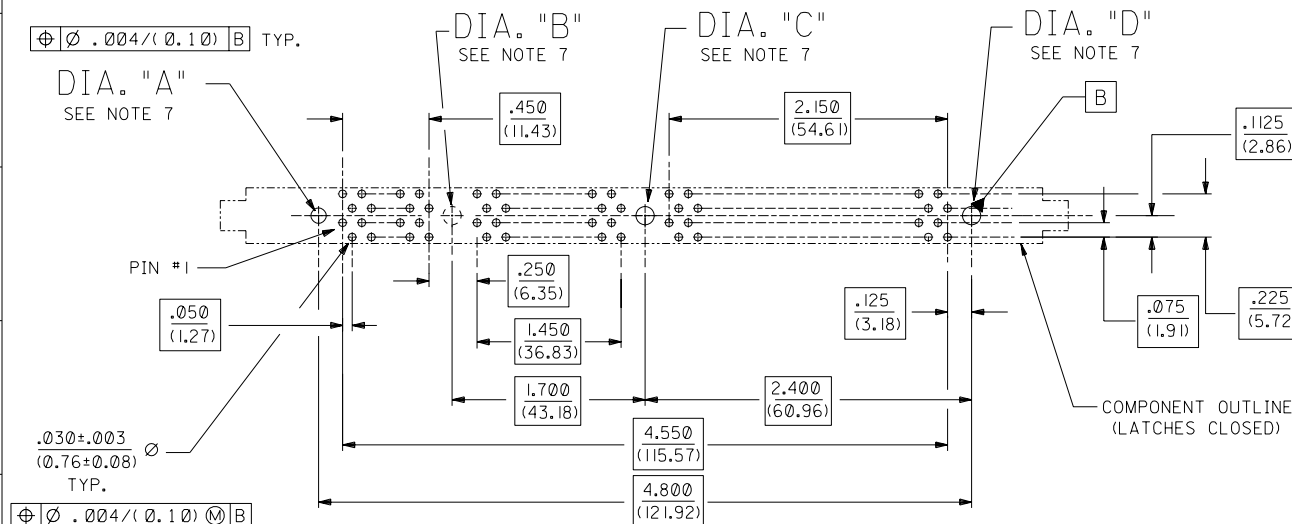

RECOMMENDED
P.C. BOARD HOLE PATTERN
(CONNECTOR SIDE)

DIMENSIONS SHOWN (METRIC) INCH				REVISE ONLY ON CAD SYSTEM			
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR $\pm 1/2^\circ$				TITLE			
INCH		METRIC		.050/(1.27) PITCH MULTI-KEY 168 CKT DIMM RAM ASSY 17.8mm LATCH SALES DWG			
3 PLACE	$\pm .005$	---	---				
2 PLACE	$\pm .---$	$\pm .013$	---				
1 PLACE	---	$\pm .025$	---				
DRAFT WHEN APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MOLEX INCORPORATED			
DRAWG. BY: DCB APP'D: DCB				PART NO. SEE CHART		DRWG. NO. SDA-71251-0***	
				FILE NAME 57125101		DATE 10/10/94	
SCALE 2:1				U.S.A. 60932		SHEET NO. 1 OF 3	
						DATE 10/10/94	
				MOLEX INC. SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DRAWN BY: DCB	
						SIZE	

13		12		11		10		9		8		7		6		71251		4		3		2		1	
PART NUMBER	COLOR	DESCRIPTION	FUNCTION KEY	VOLTAGE KEY	DIA. "A"	DIA. "B"	DIA. "C"	DIA. "D"	DIM. "H"	DIM. "P"	DIM. "S"	DIM. "T"	DIM. "W"	DIM. "X"	DIM. "Y"	DIM. "Z"	CONTACT AREA PLATING								
71251-0001	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.00 (2.36+0.08/-0.00)	.093 +.003/-0.00 (2.36+0.08/-0.00)	1.700 (43.18)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0004	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.00 (2.36+0.08/-0.00)	.093 +.003/-0.00 (2.36+0.08/-0.00)	1.700 (43.18)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0012	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.00 (2.36+0.08/-0.00)	.093 +.003/-0.00 (2.36+0.08/-0.00)	1.661 (42.19)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0013	BLACK	5.0 VOLT UNBUFFERED	OFFSET RIGHT	OFFSET LEFT	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.00 (2.36+0.08/-0.00)	.093 +.003/-0.00 (2.36+0.08/-0.00)	1.661 (42.19)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0016	BLACK	3.3 VOLT SYNCHRONOUS	OFFSET LEFT	CENTER	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.00 (2.36+0.08/-0.00)	.093 +.003/-0.00 (2.36+0.08/-0.00)	1.739 (44.17)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0017	BLACK	5.0 VOLT SYNCHRONOUS	OFFSET LEFT	OFFSET LEFT	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.00 (2.36+0.08/-0.00)	.093 +.003/-0.00 (2.36+0.08/-0.00)	1.739 (44.17)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								

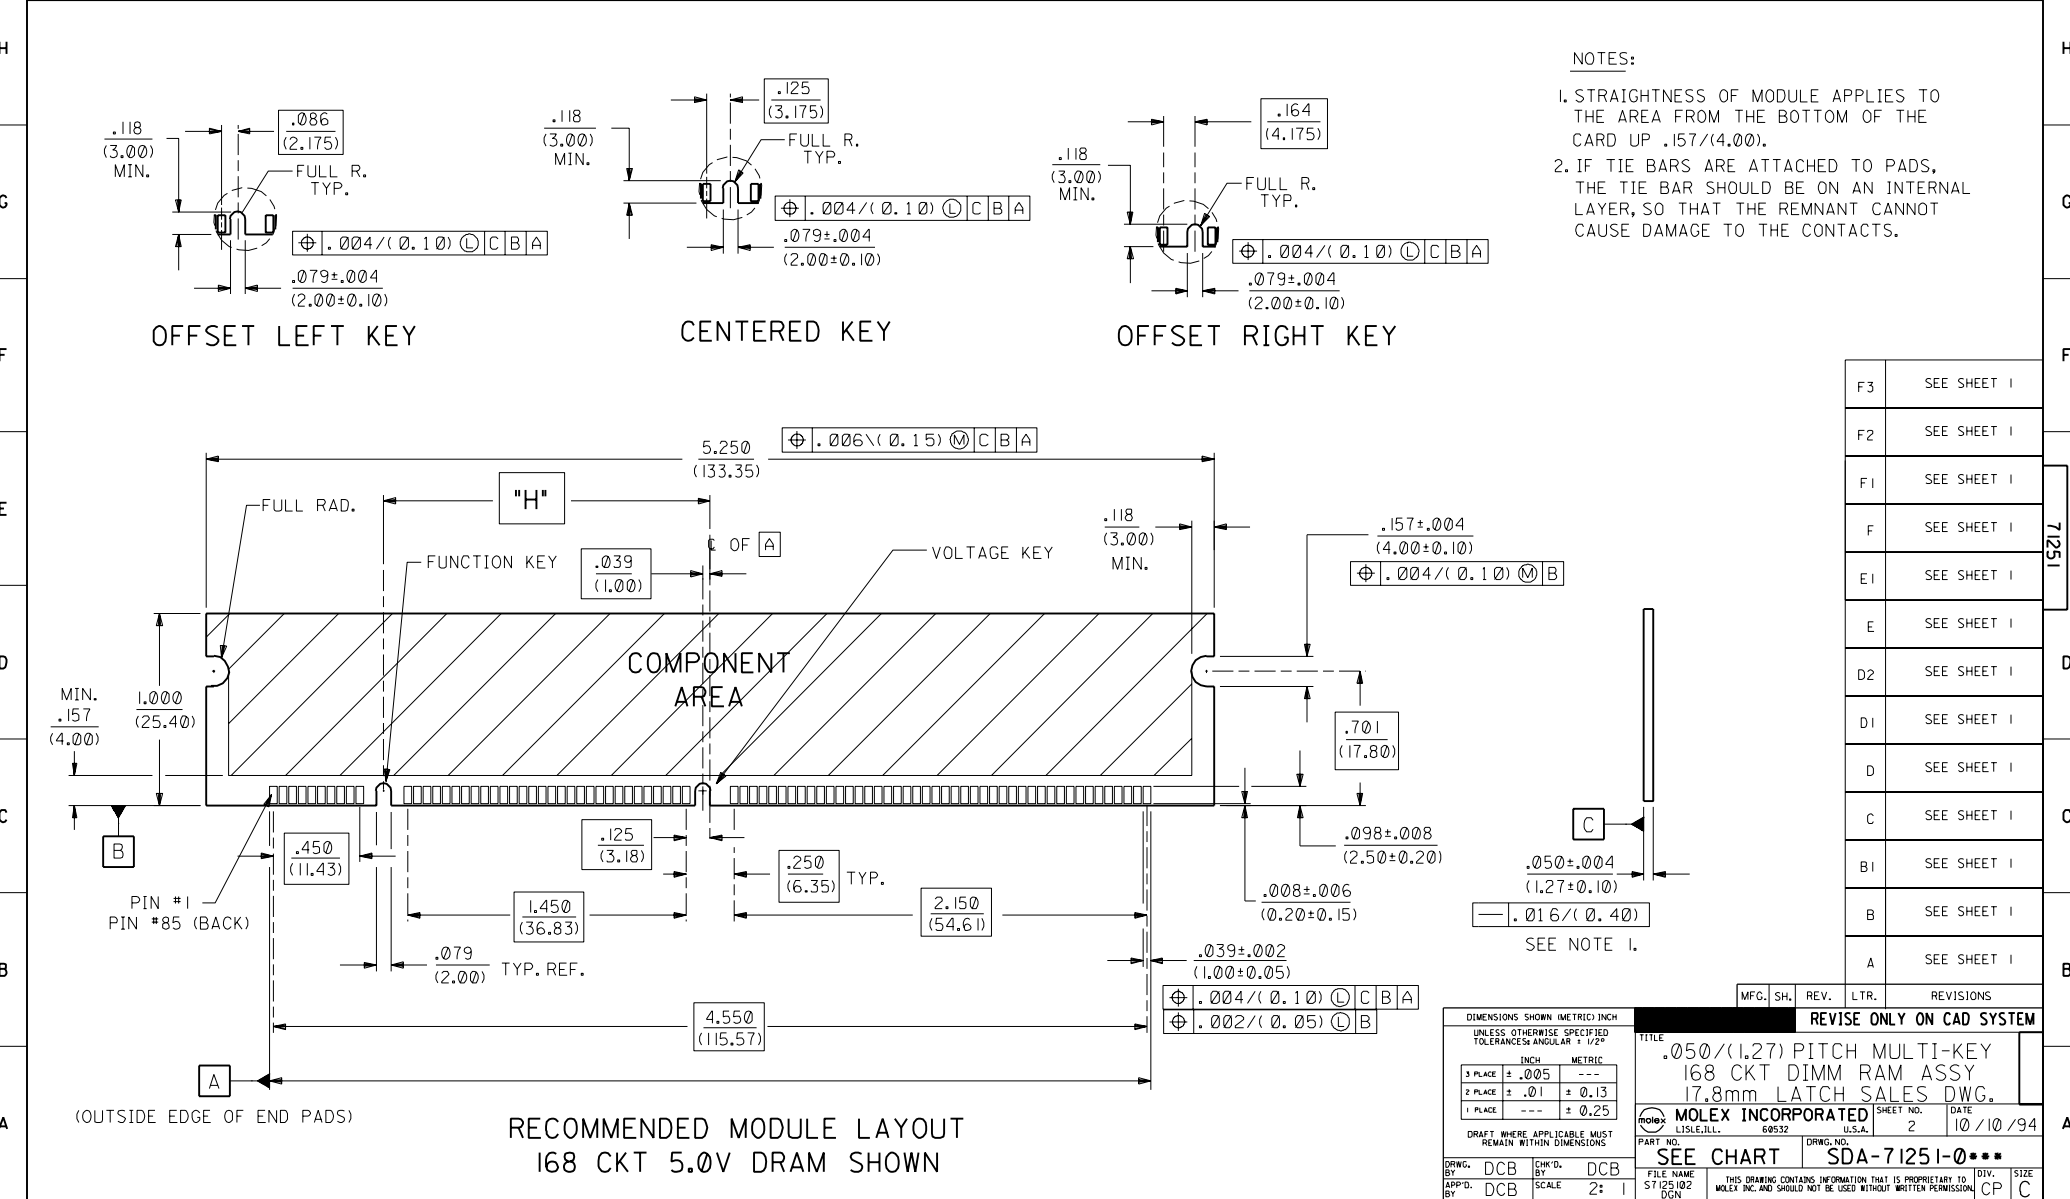

I3		I2		I1		I0		9		8		7		6		71251		4		3		2		1			
PART NUMBER	COLOR	DESCRIPTION	FUNCTION KEY	VOLTAGE KEY	DIA. "A"		DIA. "B"		DIA. "C"		DIA. "D"		DIM. "H"	DIM. "P"	DIM. "S"	DIM. "T"	DIM. "W"	DIM. "X"	DIM. "Y"	DIM. "Z"	CONTACT AREA PLATING						
71251-0001	BLACK	3.3 VOLT STD DRAM	SEE SHEET 2																		OPTION A						
71251-0002	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0003	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0004	BLACK	5.0 VOLT STD DRAM	SEE SHEET 2																		OPTION A						
71251-0005	BLACK	5.0 VOLT UNBUFFERED	OFFSET RIGHT	OFFSET LEFT	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.661}{(42.19)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0006	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0007	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.140}{(3.56)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0008	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0009	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0010	BEIGE	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.112}{(2.84)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0011	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0012	BLACK	3.3 VOLT UNBUFFERED	SEE SHEET 2																		OPTION A						
71251-0013	BLACK	5.0 VOLT UNBUFFERED	SEE SHEET 2																		OPTION A						
71251-0014	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.661}{(42.19)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.112}{(2.84)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0015	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.117}{(2.97)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0016	BLACK	3.3 VOLT SYNCHRONOUS	SEE SHEET 2																		OPTION A						
71251-0017	BLACK	5.0 VOLT SYNCHRONOUS	SEE SHEET 2																		OPTION A						
71251-0018	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.661}{(42.19)}$	$\frac{.140}{(3.56)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0019	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B						
71251-0020	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.140}{(3.56)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B						
71251-0021	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B						
71251-0022	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.661}{(42.19)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B						
71251-0023	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.661}{(42.19)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0024	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.661}{(42.19)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.105}{(2.67)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0026	BEIGE	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.090}{(2.29)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0027	BLACK	3.3 VOLT SYNCHRONOUS	OFFSET LEFT	CENTER	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.739}{(44.17)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
														DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES ANGULAR ± 1/2°				REVISE ONLY ON CAD SYSTEM									
														INCH METRIC				TITLE 050/(1.27) PITCH MULTI-KEY 168 CKT DIMM RAM ASSY 17.8mm LATCH SALES DWG.									
														3 PLACE ± .005 --- 2 PLACE ± .01 ± 0.13 1 PLACE --- ± 0.25				SHEET NO. 3 DATE 12/07/95									
														DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MOLEX INCORPORATED 1151E,ILL. 60532 U.S.A.									
														H SEE SHEET 1				PART NO. SEE CHART DRAWING NO. SDA-71251-0...									
														F3 SEE SHEET 1				FILE NAME ST 25103 COPD.									
LTR. REVISIONS														LTR. REVISIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
I3		I2		I1		I0		9		8		7		6		5		4		3		2		1			