

GLASS PASSIVATED RECTIFIER

<p>FEATURES</p> <ul style="list-style-type: none"> • Glass passivated chip junction • Low forward voltage drop • Low reverse leakage • High forward surge current capability • High temperature soldering guaranteed: 260°C/10 seconds/0.375" (9.5mm) lead length at 5 lbs (2,3kg) tension <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> • Case: Transfer molded plastic • Epoxy: UL94V-0 rate flame retardant • Polarity: Color band denotes cathode end • Lead: Plated axial lead ,solderable per MIL-STD-202E method 208c • Mounting position: Any • Weight: 0.007ounce, 0.20 gram 	<p>VOLTAGE RANGE CURRENT</p> <p>50 to 1000Volts 1.0 Ampere</p> <p style="text-align: right;">R-1</p> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>
--	--

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load derate current by 20%.

	SYMBOLS	1G1	1G2	1G3	1G4	1G5	1G6	1G7	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at T _A =25°C	I _(AV)	1.0							Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	25							Amps
Maximum Instantaneous Forward Voltage at 1.0A	V _F	1.1							Volts
Maximum DC Reverse Current at rated DC blocking voltage	I _R	5.0							μAmps
		50							
Maximum Full Load Reverse Current, full cycle average 0.375" (9.5mm) lead length at T _L =75°C	I _{R(AV)}	30							μAmps
Typical Junction Capacitance(NOTE1)	C _J	15							pF
Typical Thermal Resistance(NOTE2)	R _{θJA}	50							°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +175							°C

NOTES:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
2. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, P.C. board mounted.

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

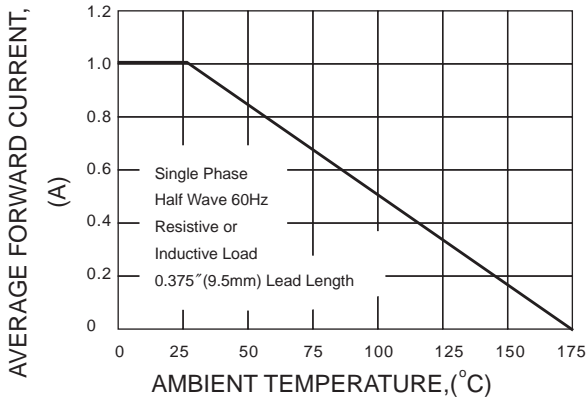


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

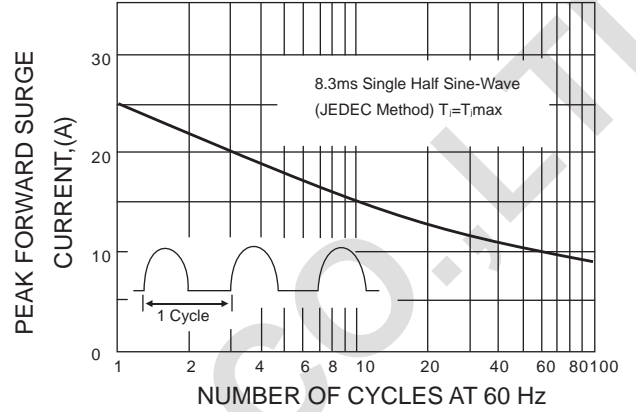


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

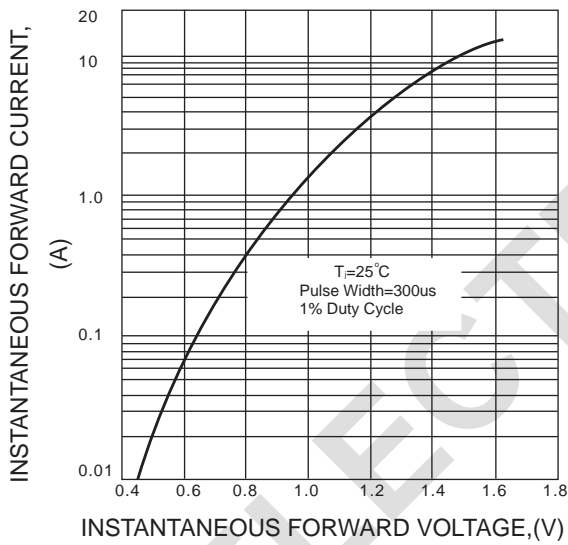


FIG.4-TYPICAL REVERSE CHARACTERISTICS

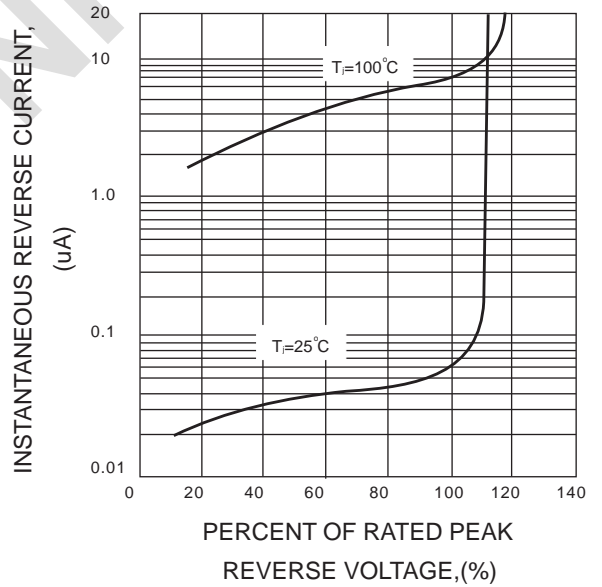


FIG.5-TYPICAL JUNCTION CAPACITANCE

