

# KR Electronics

## General Description


KR 2829-SMA is a 760 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 50 MHz and greater than 20 dB at 680 MHz and 845 MHz. Other center frequencies and bandwidths are available. Please consult the factory.

### Features


- 760 MHz Lowpass
- SMA Connectors
- 50  $\Omega$  Source and Load

## Typical Performance

### Passband Amplitude & Group Delay (1 dB/div & 5 nsec/div)

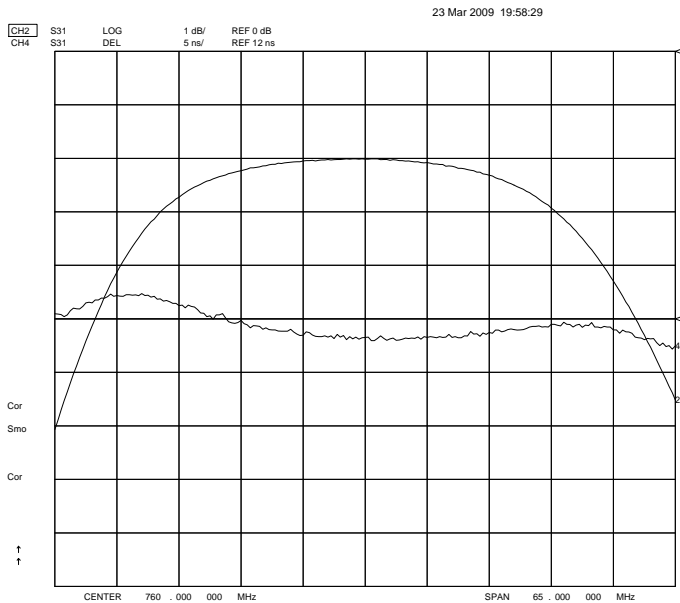

### Overall Response (10 dB/div)

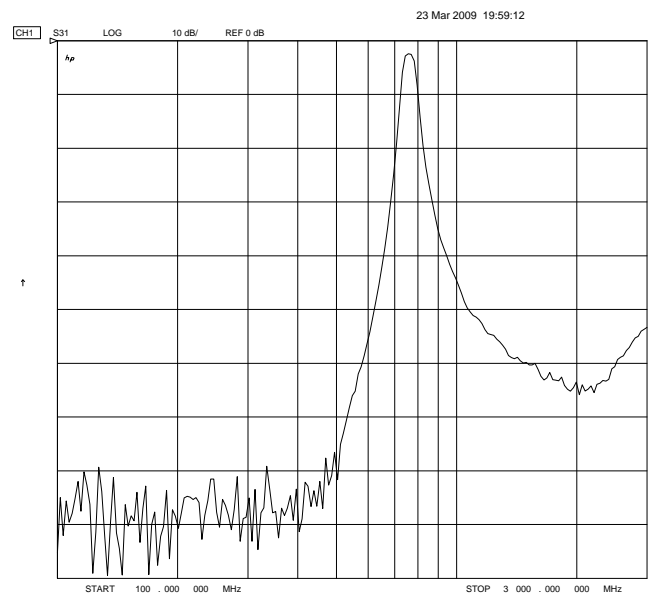

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2829-SMA

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	760 MHz
Insertion Loss	< 3.75 dB (2.5 dB typical)
3 dB Bandwidth	50 to 60 MHz
Attenuation at 680 MHz	20 dB min
Attenuation at 845 MHz	20 dB min
Source and Load	50 $\Omega$

## Physical Dimensions

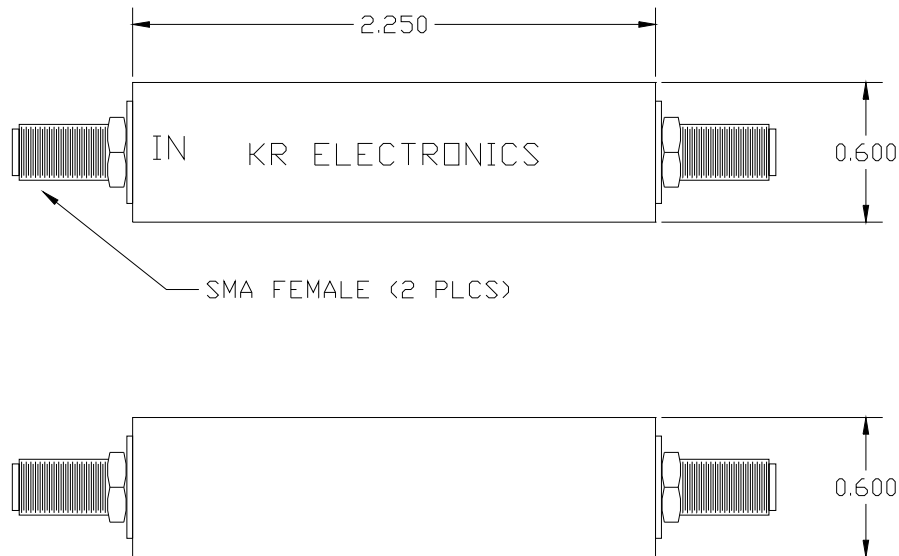

**Notes:**

1. Dimensions in inches