PHASE LOCKED OSCILLATOR

MODEL 621525 (1800 MHz)

Features

- **Low Phase Noise: -132 dBc/Hz @ 100 kHz**
- **Low Spurious: -70 dBc Typical**
- **External Reference**
- **Environmental Screening Available**

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 ºC	MIN/MAX Ta = -20 ºC to +70 ºC
Frequency	1800 MHz	1800 MHz
Output Power (dBm)	+13	+12
Variation Over Temperature (dBm)	+/- 0.75 dBm	+/- 1 dBm
Spurious (dBc)	-70	-60
Phase Noise (dB)	-102 dBc/Hz @ 100 Hz -125 dBc/Hz @ 1 kHz -127 dBc/Hz @ 10 kHz -125 dBc/Hz @ 30 kHz -132 dBc/Hz @ 100 kHz -144 dBc/Hz @ 1 MHz	
VSWR	1.5	2.0
Harmonics (dBc)	-25	-20
External Reference	100 MHz	1 / 200 MHz
Lock Indicator	TTL (High=Locked)	TTL (Low=Unlocked)
Storage Temperature	-55 ºC	+125 ºC
Supply Power DC mA	15 120	15 125


Description

Spectrum Microwave's Series 600 Phase Locked Oscillators use a High "Q" Coaxial Resonator in the resonant circuit. The circuit is lightly loaded to obtain the lowest phase noise possible.

The resonator is soldered to a printed circuit board and well grounded to minimize modulation sidebands during shock and vibration.

Buffer amplifiers are used to provide isolation from load VSWRs; Regulators filter noise on the DC input voltage.

Internal reference models are also available. A lock indicator circuit is provided to signal an out-of-lock condition.

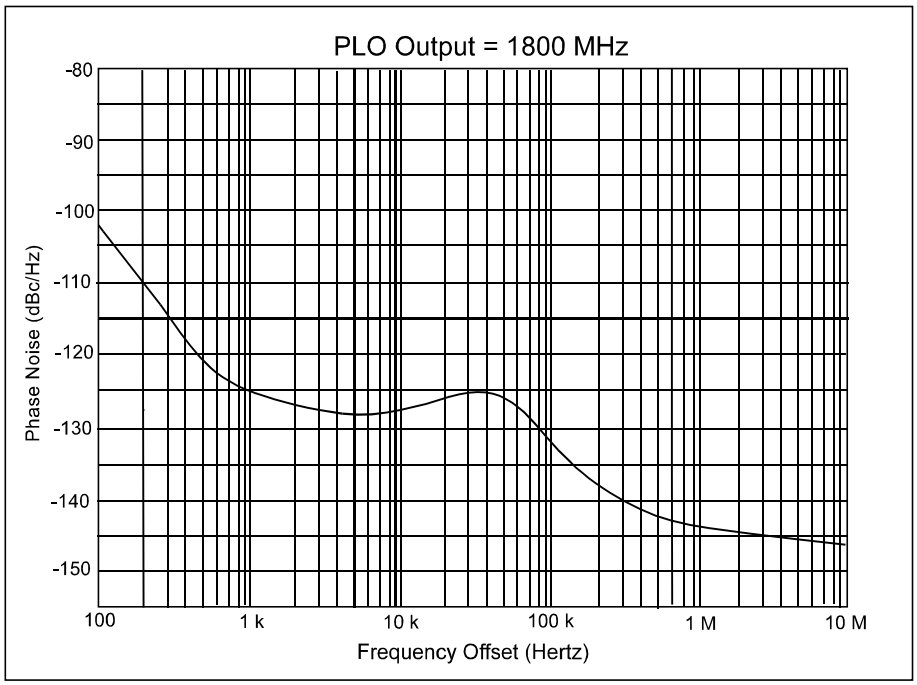


Spectrum Microwave, Inc.
www.SpectrumMicrowave.com
2707 Black Lake Place Phila, Pa. 19154
PH: 215-464-4000 FAX: 215-464-4001
Rev. 3/19/09

PHASE LOCKED OSCILLATOR

MODEL 621525 (1800 MHz)

Outline Drawing

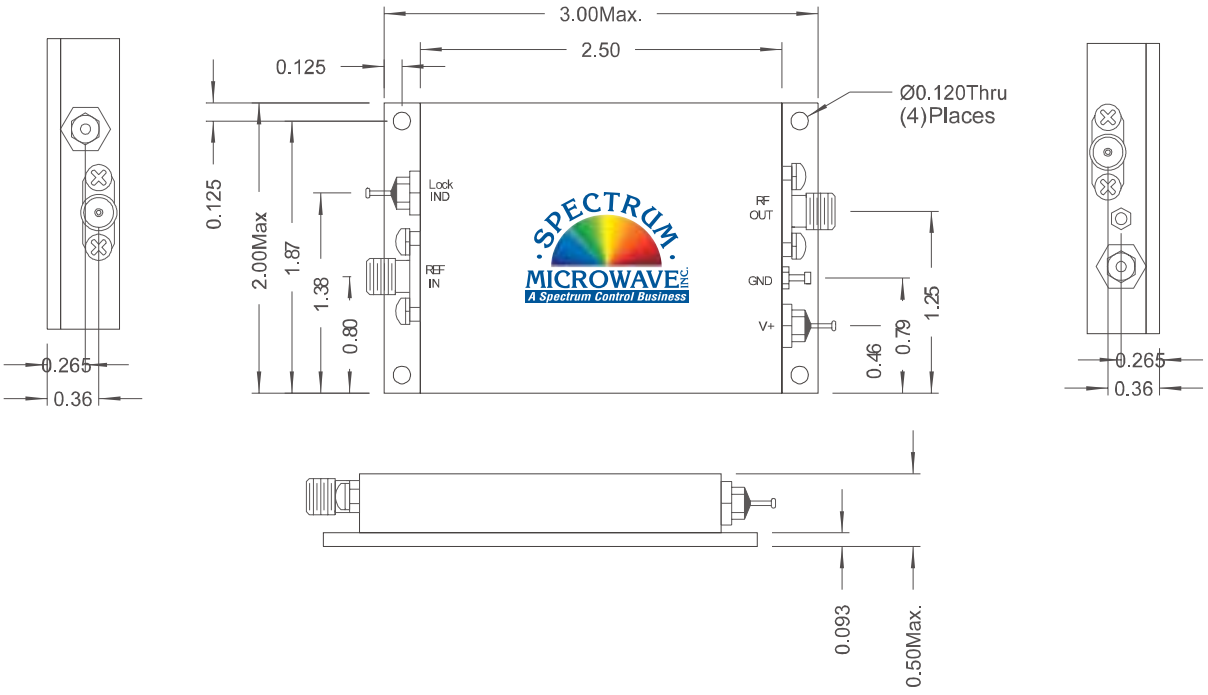

Spectrum Microwave, Inc.
www.SpectrumMicrowave.com

2707 Black Lake Place Phila, Pa. 19154
PH: 215-464-4000 FAX: 215-464-4001