

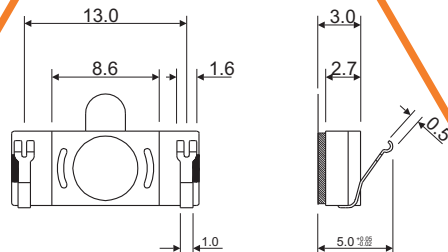


# SoniCrest


## SPEAKER SOUND GENERATORS

### HSR0615C-32



#### Dimension

Unit : mm  
Tolerance : ±0.3mm

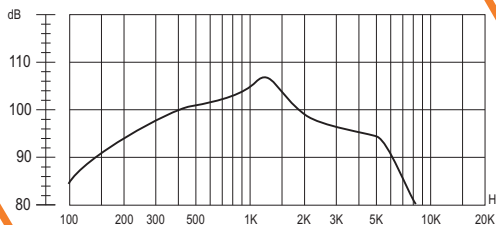

#### Frequency Response

Applied Voltage : 100mV, Sine Wave  
Based on IEC-R318 Standard

- **Specification** (all data taken at 25°C unless otherwise specified)

| Coil Impedance (Ω) | Rated Power (mW) | Maximum Input Power (mW) | ★Sensitivity at 1kHz (dB) | ★Frequency Range (Hz) | Total Harmonic Distortion (THD) | Operating Temperature (°C) | Storage Temperature (°C) |
|--------------------|------------------|--------------------------|---------------------------|-----------------------|---------------------------------|----------------------------|--------------------------|
| 32 ±20%            | 10               | 30                       | 105 ± 3                   | 300 ~ 4000            | < 5%                            | -40 ~ +70                  | -40 ~ +70                |

### HSR0615C-32

The specification are only for 32Ω version. Specification for other impedance is available upon request.  
★value Applied 100mV Input Power and Based on IEC-R318 Standard.