SONY

SGM2016M/P

GaAs N-channel Dual-Gate MES FET

For the availability of this product, please contact the sales office.

Description

The SGM2016M/P is an N-channel dual-gate GaAs MES FET for UHF-band low-noise amplification. This FET is suitable for a wide range of applications including UHF TV tuners, cellular radios, and DBS IF amplifiers.

Features

- Low voltage operation
- Low noise NF=1.2dB (typ.) at 900MHz
- High gain Ga=21dB (typ.) at 900MHz
- High stability
- Built-in gate protection diode

Application

UHF-band high-frequency amplifier, mixer, and oscillator


Structure

GaAs, N-channel, dual-gate metal semiconductor field-effect transistor


Absolute Maximum Ratings (Ta=25℃)

• Drain to source voltage	V_{DSX}	12	V
• Gate 1 to source voltage	V_{G1S}	−5	V
• Gate 2 to source voltage	V_{G2S}	−5	V
• Drain current	I_D	55	mA
• Allowable power dissipation	P_D	150	mW
• Channel temperature	Tch	150	℃
• Storage temperature	Tstg	−55 to +150	℃

Marking



SGM2016M




SGM2016P

Package Outline

Unit : mm


SGM2016M

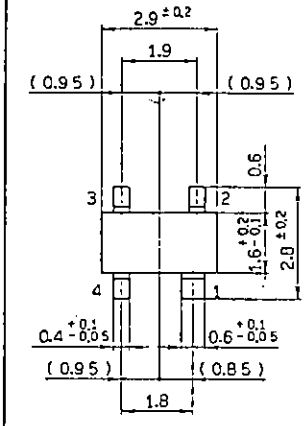

M-254

1 : Source
2 : Gate 1
3 : Gate 2
4 : Drain

SGM2016P

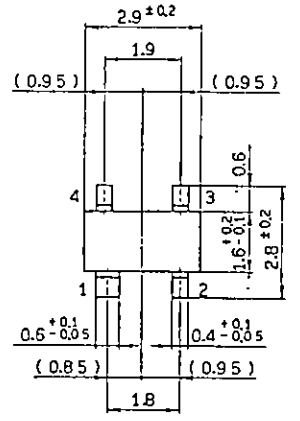

M-255

1 : Source
2 : Drain
3 : Gate 2
4 : Gate 1


Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.


E92179B47 – ST

Electrical Characteristics (Ta=25℃)


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Drain cut-off current	I_{DSX}	V_{DS}=12V V_{G1S}=–4V V_{G2S}=0V			50	μA
Gate 1 to source current	I_{G1SS}	V_{G1S}=–4.5V V_{G2S}=0V V_{DS}=0V			–8	μA
Gate 2 to source current	I_{G2SS}	V_{G2S}=–4.5V V_{G1S}=0V V_{DS}=0V			–8	μA
Drain saturation current	I_{DSS}	V_{DS}=5V V_{G1S}=0V V_{G2S}=0V	10		35	mA
Gate 1 to source cut-off voltage	V_{G1S} (OFF)	V_{DS}=5V I_D=100 μA V_{G2S}=0V			–2.5	V
Gate 2 to source cut-off voltage	V_{G2S} (OFF)	V_{DS}=5V I_D=100 μA V_{G1S}=0V			–2.5	V
Forward transfer admittance	gm	V_{DS}=5V I_D=10mA V_{G2S}=1.5V f=1kHz	20	30		mS
Input capacitance	Ciss	V_{DS}=5V I_D=10mA V_{G2S}=1.5V f=1MHz		0.9	2.0	pF
Feedback capacitance	Crss			25	40	fF
Noise figure	NF	V_{DS}=5V I_D=10mA V_{G2S}=1.5V f=900MHz		1.2	2.0	dB
NF associated gain	Ga		17	21		dB

Typical Characteristics (Ta=25℃)

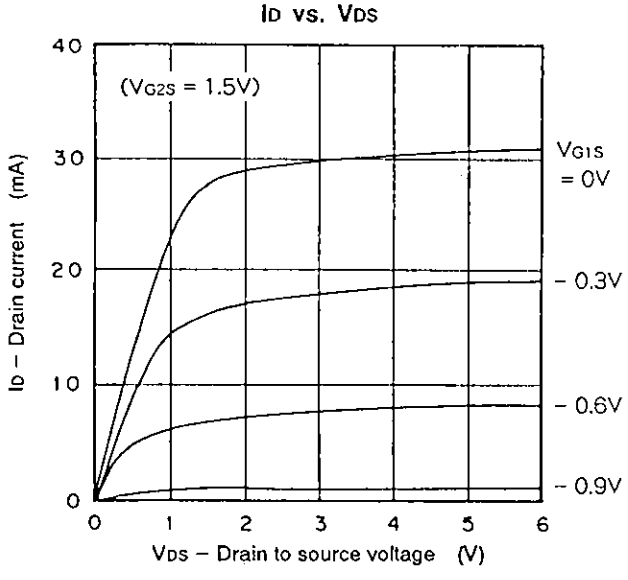


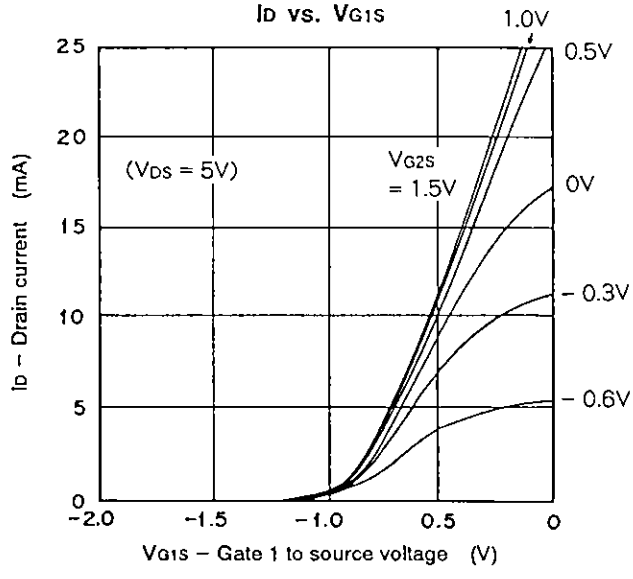


I_D vs. V_{G2S}

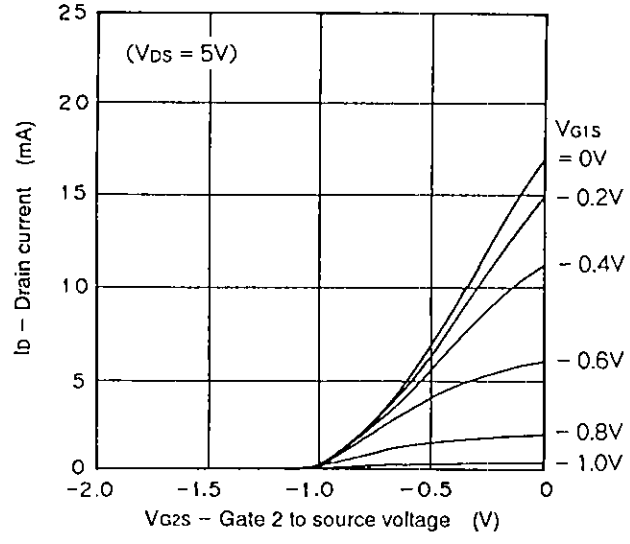


gm vs. V_{G1S}

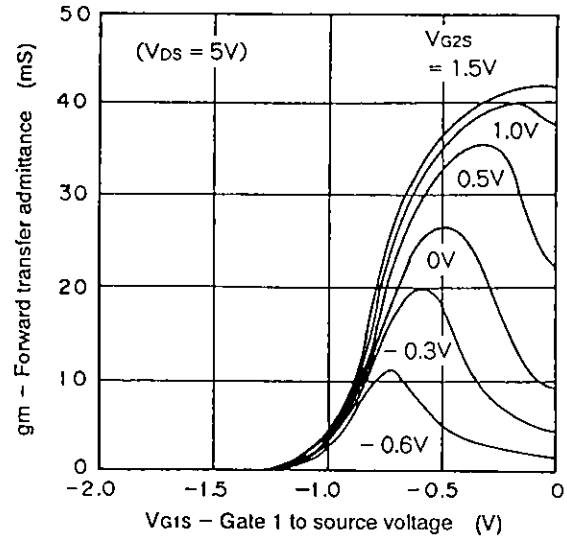


NF vs. V_{G1S}

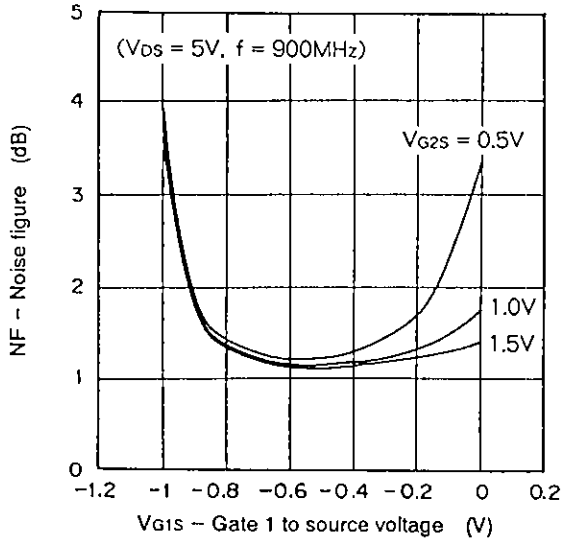


Ga vs. V_{G1S}

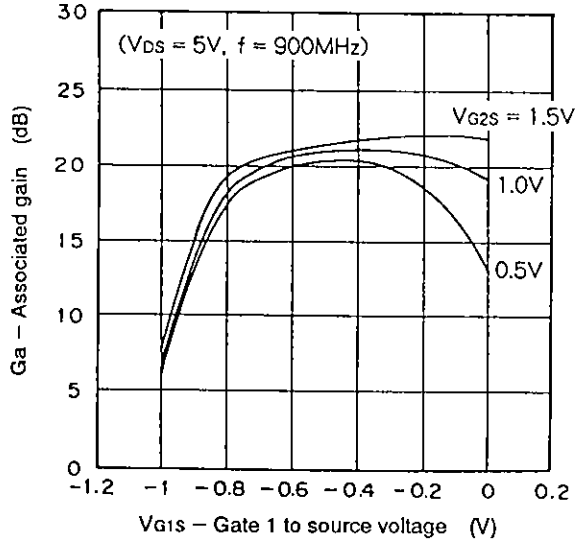

NF, Ga vs. I_D

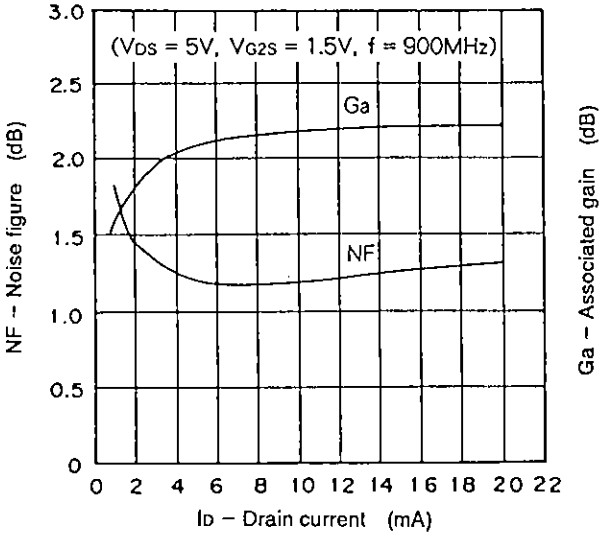


NF, Ga vs. f

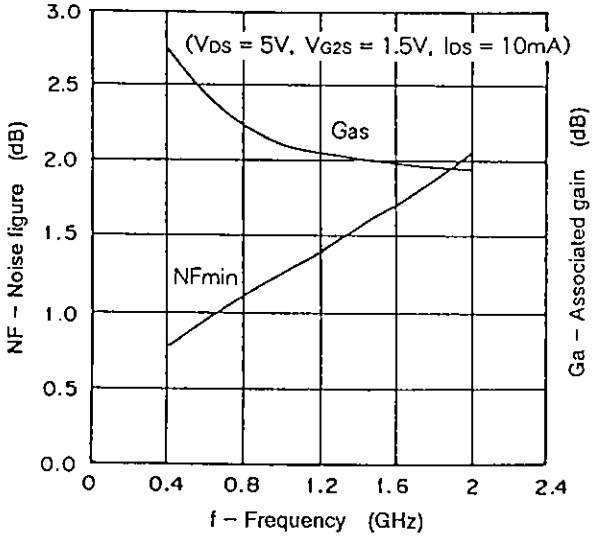


Noise Figure Characteristics (V_{DS}=5V, V_{G2S}=1.5V, I_D=10mA)

f (MHz)	NF min (dB)	Gamma Optimum MAG	Gamma Optimum ANG	Rn (Ω)	Ga (dB)	f (MHz)	NF min (dB)	Gamma Optimum MAG	Gamma Optimum ANG	Rn (Ω)	Ga (dB)
200	0.75	0.92	6.4°	40.2	30.5	1200	1.41	0.66	29.3°	35.4	20.1
300	0.81	0.89	9.3°	39.8	28.7	1300	1.48	0.64	31.3°	34.9	19.9
400	0.87	0.85	11.9°	39.3	27.2	1400	1.56	0.62	33.5°	34.4	19.7
500	0.94	0.82	14.4°	38.9	25.8	1500	1.63	0.60	35.7°	33.8	19.7
600	1.00	0.79	16.8°	38.4	24.5	1600	1.70	0.59	38.1°	33.3	19.8
700	1.07	0.77	19.0°	37.9	23.4	1700	1.78	0.57	40.6°	32.7	20.0
800	1.13	0.74	21.1°	37.4	22.5	1800	1.85	0.55	43.4°	32.2	20.4
900	1.20	0.72	23.2°	36.9	21.7	1900	1.93	0.54	46.3°	31.6	20.9
1000	1.27	0.70	25.2°	36.4	21.0	2000	2.01	0.52	49.4°	31.0	21.4
1100	1.34	0.68	27.2°	35.9	20.5						

S-parameters vs. Frequency Characteristics (V_{DS}=5V, V_{G2S}=1.5V, I_D=10mA)

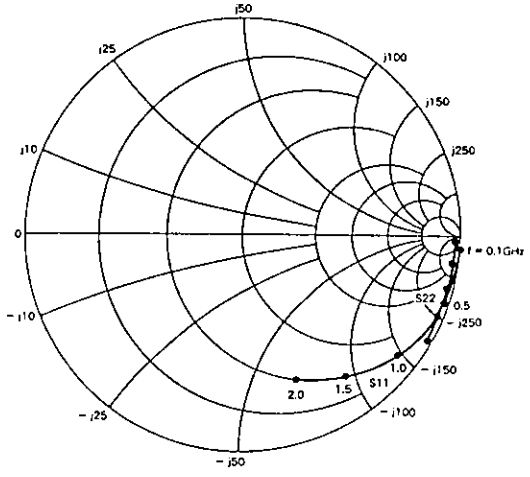

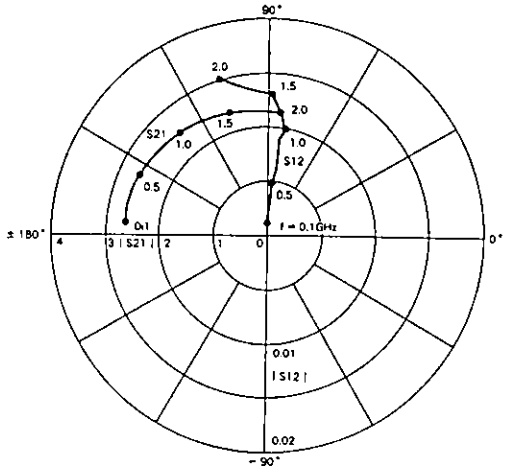

f (MHz)	S_{11} MAG	S_{11} ANG	S_{21} MAG	S_{21} ANG	S_{12} MAG	S_{12} ANG	S_{22} MAG	S_{22} ANG
100	1.000	–3.7°	2.633	175.1°	.001	92.3°	.974	–1.4°
200	1.000	–7.3°	2.629	170.0°	.002	88.0°	.972	–2.8°
300	.992	–11.1°	2.615	165.0°	.004	86.6°	.977	–4.5°
400	.985	–14.8°	2.603	159.8°	.004	82.1°	.974	–6.0°
500	.977	–18.4°	2.594	154.8°	.005	88.3°	.969	–7.4°
600	.964	–22.2°	2.576	149.9°	.007	83.1°	.972	–8.8°
700	.952	–25.8°	2.557	145.0°	.008	83.0°	.971	–10.3°
800	.940	–29.4°	2.541	139.9°	.009	82.7°	.970	–11.7°
900	.922	–32.9°	2.524	135.5°	.009	83.7°	.966	–13.1°
1000	.905	–36.4°	2.484	130.3°	.010	79.9°	.970	–14.4°
1100	.890	–39.7°	2.460	125.6°	.012	86.3°	.965	–16.1°
1200	.870	–43.2°	2.437	121.0°	.012	83.8°	.968	–17.4°
1300	.851	–46.6°	2.425	116.6°	.012	80.8°	.967	–18.7°
1400	.833	–50.1°	2.403	111.8°	.012	85.4°	.969	–20.1°
1500	.813	–53.2°	2.381	107.3°	.013	88.2°	.969	–21.5°
1600	.791	–56.3°	2.345	102.8°	.013	86.8°	.969	–23.1°
1700	.772	–59.5°	2.333	98.1°	.013	90.3°	.970	–24.6°
1800	.751	–62.6°	2.309	93.5°	.014	93.3°	.971	–25.9°
1900	.733	–65.6°	2.289	89.1°	.014	102.7°	.975	–27.6°
2000	.716	–68.6°	2.281	84.4°	.015	107.5°	.979	–29.1°

This data sheet has been made from recycled paper to help protect the environment.