
UG1N120

Preliminary ***Insulated Gate Bipolar Transistor***

5.3A, 1200V NPT SERIES N-CHANNEL IGBT

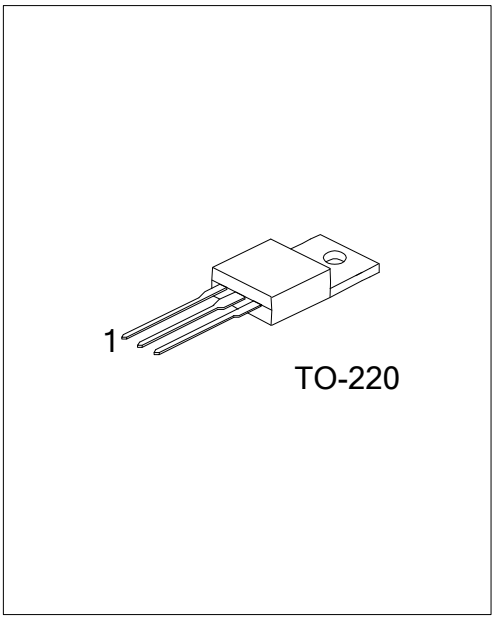

■ DESCRIPTION


The UTC **UG1N120** is a NPT series N-Channel IGBT, it uses UTC's advanced technology to provide the customers with a minimum on-state resistance, etc.

The UTC **UG1N120** is suitable for AC and DC motor controls, power supplies, and drivers for solenoids, relays and contactors, etc.

■ FEATURES

* Low conduction loss
* Short circuit rating

■ SYMBOL




■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UG1N120L-TA3-T	UG1N120G-TA3-T	TO-220	G	C	E	Tube

Note: Pin Assignment: G: Gate C: Collector E: Emitter

UG1N120L-TA3-T (1)Packing Type (2)Package Type (3)Green Package	(1) T: Tube (2) TA3: TO-220 (3) L: Lead Free, G: Halogen Free and Lead Free

■ MARKING

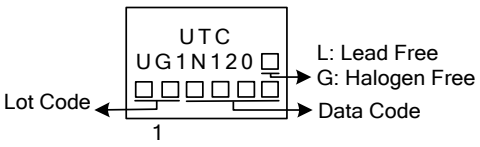

Copyright © 2014 Unisonic Technologies Co., Ltd

■ ABSOLUTE MAXIMUM RATING (T_C=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector to Emitter Voltage		BV_{CES}	1200	V
Gate to Emitter Voltage Continuous		V_{GES}	±20	V
Gate to Emitter Voltage Pulsed		V_{GEM}	±30	V
Collector Current Continuous	T_C=25°C	I_C	5.3	A
	T_C=110°C		2.7	A
Collector Current Pulsed (Note 1)		I_{CM}	6	A
Power Dissipation Total at T_C=25°C		P_D	60	W
Power Dissipation Derating T_C>25°C			0.476	W/°C
Forward Voltage Avalanche Energy (Note 2)		E_{AV}	10	mJ
Short Circuit Withstand Time (Note 3) at V_{GE}=15V		t_{SC}	8	μs
Short Circuit Withstand Time (Note 3) at V_{GE}=12V		t_{SC}	13	μs
Operating Junction Temperature Range		T_J	-55~+150	°C
Storage Temperature Range		T_{STG}	-55~+150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Pulse width limited by maximum junction temperature.
3. I_{CE}=7A, L=400μH, V_{GE}=15V, T_J=25°C.
4. $V_{CE(PK)}$=840V, T_J=125°C, R_G=82Ω.

■ THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Case	θ_{JC}	2.1	°C/W

■ ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Collector to Emitter Breakdown Voltage	BV_{CES}	I_C=250μA, V_{GE}=0V		1200			V
Emitter to Collector Breakdown Voltage	BV_{ECS}	I_C=10mA, V_{GE}=0V		15			V
Collector to Emitter Leakage Current	I_{CES}	V_{CE}=1200V	T_C=25°C			250	μA
			T_C=125°C		20		μA
			T_C=150°C			1.0	mA
Collector to Emitter Saturation Voltage	$V_{CE(SAT)}$	I_C=1.0A, V_{GE}=15V	T_C=25°C		2.5	2.9	V
			T_C=150°C		3.8	4.3	V
Gate to Emitter Threshold Voltage	$V_{GE(TH)}$	I_C=50μA, V_{CE}=V_{GE}		6.0	7.1		V
Gate to Emitter Leakage Current	I_{GES}	V_{GE}=±20V				±250	nA
Switching SOA	SSOA	T_J=150°C, R_G=82Ω, V_{GE}=15V, L=2mH, $V_{CE(PK)}$=1200V		6			A
Gate to Emitter Plateau Voltage	V_{GEP}	I_C=1.0A, V_{CE}=600V			9.2		V
On-State Gate Charge	$Q_{G(ON)}$	I_C=1.0A, V_{CE}=600V	V_{GE}=15V		14	20	nC
			V_{GE}=20V		15	21	nC
Current Turn-On Delay Time	$t_{d(ON)I}$	IGBT and Diode at T_J=25°C I_{CE}=1.0A, V_{CE}=30V, V_{GE}=15V, R_G=82Ω			200		ns
Current Rise Time	t_{rI}				470		ns
Current Turn-Off Delay Time	$t_{d(OFF)I}$				118		ns
Current Fall Time	t_{fI}				200		ns

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.