HV2036

2.0A 2x36kV--High Voltage Half Bridge Rectifier

HVGT high voltage bridge rectifier is made of high quality glass passivated chip and high reliability epoxy resin sealing structure, and through professional testing equipment inspection qualified after to customers.

FEATURES:

1. High reliability design.
2. Large current design.
3. Power frequency ratio.
4. Conform to RoHS.
5. Epoxy resin molded in vacuum Have anticorrosion in the surface.

APPLICATIONS:

1. Ignition device power supply.
2. Microwave emission power.
3. General purpose high voltage rectifier.


MECHANICAL DATA:

1. Case: epoxy resin molding.
2. Terminal: built-in M5 nut.
3. Net weight: 330grams (approx).

SHAPE DISPLAY:



SIZE: (Unit:mm) **HVGT NAME: HVD-32**

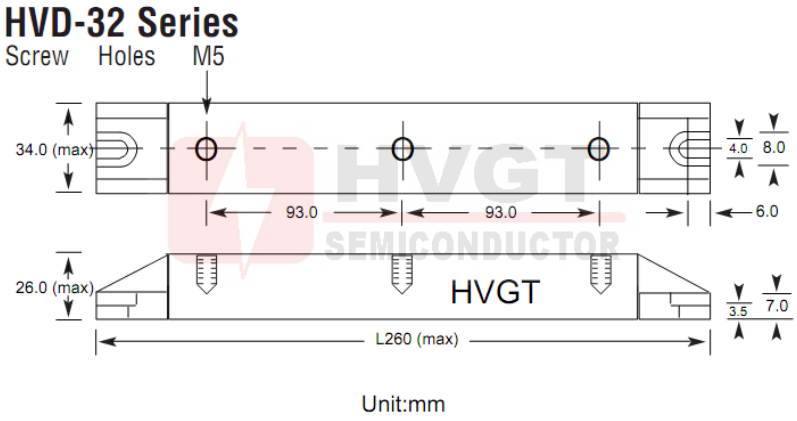

MAXIMUM RATINGS AND CHARACTERISTICS: (Absolute Maximum Ratings)

Items	Symbols	Condition	Data Value	Units
Repetitive Peak Renerse Voltage	V_{RRM}	Ta=25°C; I_R =1.0uA	2x36	kV
Average Output Current	I_O	Ta=25°C;Resistive Load	2.0	A
Suege Current	I_{FSM}	Ta=25°C;8.3 mS	60.0	A
Junction Temperature	T_J		-40~+125	°C
Allowable Operation Case Temperature	Tc		125	°C
Storage Temperature	T_{STG}		-40~+125	°C

ELECTRICAL CHARACTERISTICS: Ta=25°C (Unless otherwise specified)

Items	Symbols	Condition	Data value	Units
Maximum Forward Voltage Drop	V_F	at 25°C;I_F =$I_{F(AV)}$	2x64	V
Maximum Reverse Current	I_R1	at 25°C;V_R =V_{RRM}	5.0	uA
	I_R2	at 100°C;V_R =V_{RRM}	50.0	uA
Maximum Reverse Recovery Time	T_{RR}	at 25°C; I_F=mA; I_R=mA; I_{RR}=mA	--	nS
Junction Capacitance	C_J	at 25°C; V_R=0V; f=1MHz	--	pF

Downloaded from 2016 datasheet.com