



2.54mm CENTER SINGLE ROW PIN WAFER

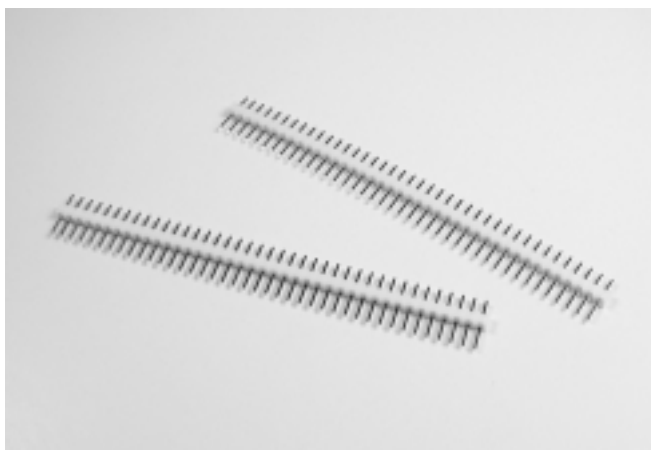

254211MS Series

Specifications:

- **2~40 Circuits**
- **Insulator Material** : White High Temp. Plastic
- **Operating Temp. Range** : -40°C To +105°C
- **Terminal Material** : Brass 65/35
- **Plating** : Tin Plated
- **Max. Current Rating** : 1.5A
- **Max. Voltage Rating** : 250V AC
- **Dielectric Strength** : 500V AC For 60 Seconds

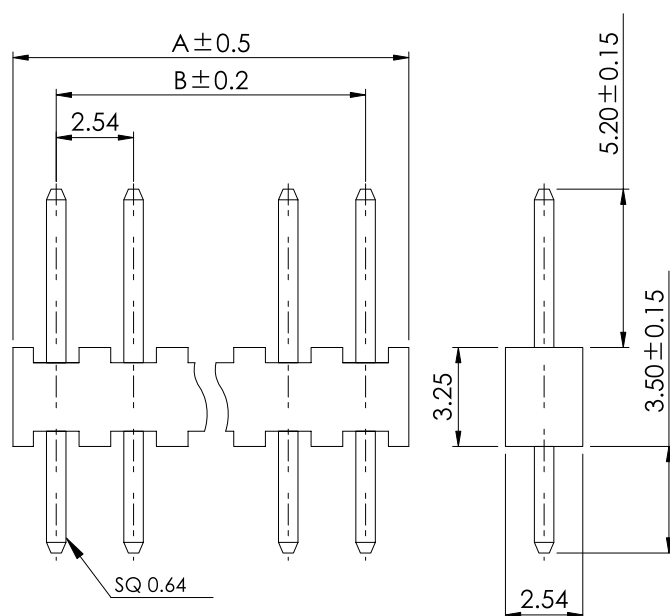

2.54
mm


Order Information

254211MS□□□□00NO
1 2 3 4 5

1. 'S' : Straight DIP Type
 2. No. of Pins
 3. Plating
 4. Color 'N' : White
 5. Package
- 'O' : Slim Box Without CAP

Reference Page 11

Recommended P.C.B. Layout

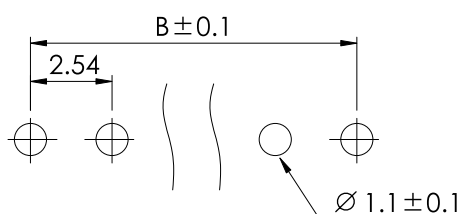

Dimension Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
254211MS002□□00NO	5.38	2.54	254211MS022□□00NO	56.18	53.34
254211MS003□□00NO	7.92	5.08	254211MS023□□00NO	58.72	55.42
254211MS004□□00NO	10.46	7.62	254211MS024□□00NO	61.26	58.42
254211MS005□□00NO	13.00	10.16	254211MS025□□00NO	63.80	60.96
254211MS006□□00NO	15.54	12.70	254211MS026□□00NO	66.34	63.50
254211MS007□□00NO	18.08	15.24	254211MS027□□00NO	68.88	66.04
254211MS008□□00NO	20.62	17.78	254211MS028□□00NO	71.42	68.58
254211MS009□□00NO	23.16	20.32	254211MS029□□00NO	73.96	71.12
254211MS010□□00NO	25.70	22.86	254211MS030□□00NO	76.50	73.66
254211MS011□□00NO	28.24	25.40	254211MS031□□00NO	79.04	76.20
254211MS012□□00NO	30.78	27.94	254211MS032□□00NO	81.58	78.74
254211MS013□□00NO	33.32	30.48	254211MS033□□00NO	84.12	81.28
254211MS014□□00NO	35.86	33.02	254211MS034□□00NO	86.66	83.82
254211MS015□□00NO	38.40	35.56	254211MS035□□00NO	89.20	86.36
254211MS016□□00NO	40.94	38.10	254211MS036□□00NO	91.74	88.90
254211MS017□□00NO	43.48	40.64	254211MS037□□00NO	96.82	91.44
254211MS018□□00NO	46.02	43.18	254211MS038□□00NO	96.82	93.98
254211MS019□□00NO	48.56	45.72	254211MS039□□00NO	99.36	96.52
254211MS020□□00NO	51.10	48.26	254211MS040□□00NO	101.9	99.06
254211MS021□□00NO	53.64	50.80			