



SHEET 1 OF 1

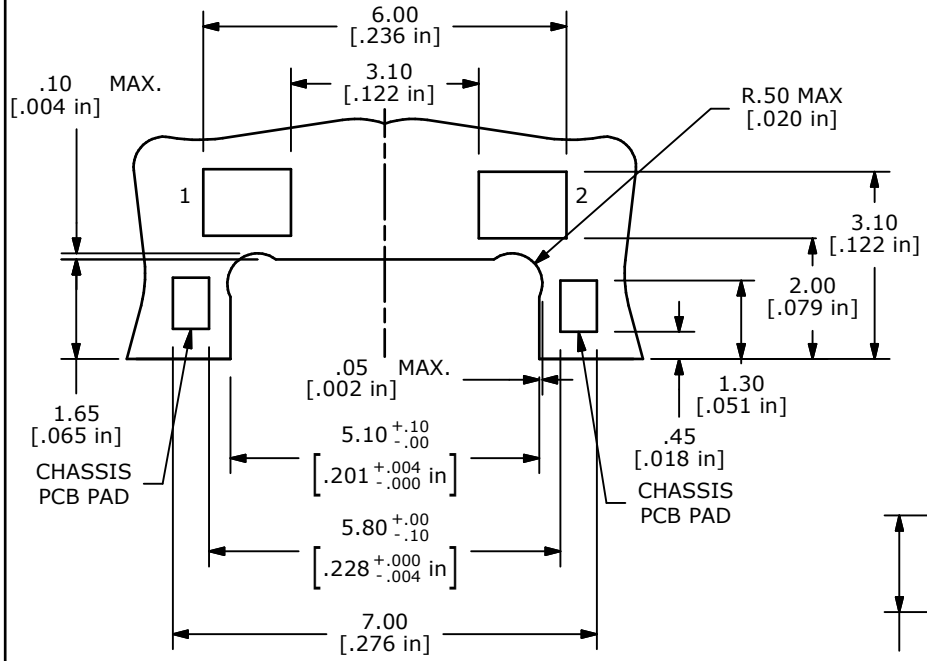



P.C.B. LAYOUT

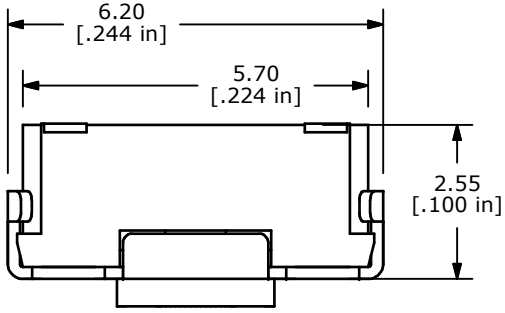


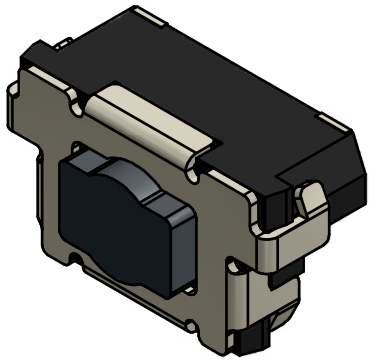

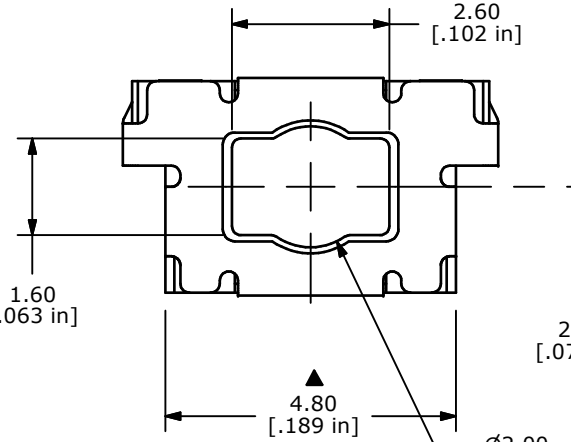


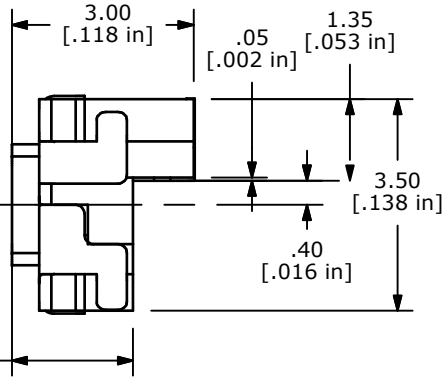
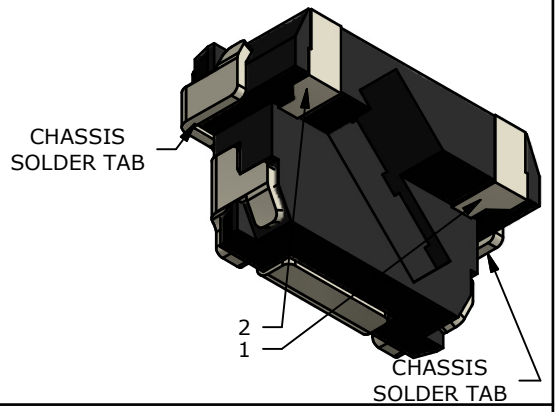

NOTES
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
▲ 4. OPERATING FORCE: 120± 50gf
5. OPERATING LIFE: 1,000,000 CYCLES
6. TRAVEL: 0.15± 0.1mm
▲ 7. CONTACT RATING: 12 VDC, 50mA
8. CONTACT RESISTANCE: 100m Ω MAX INITIAL
9. INSULATION RESISTANCE: 100M Ω MIN. @ 500 VDC
10. BOUNCE MAX: 10m SEC MAX
11. DIELECTRIC STRENGTH: 250 VAC FOR 1 MINUTE
12. OPERATING TEMPERATURE: -40˚C TO 85˚C
13. STORAGE TEMPERATURE: -40˚C TO 85˚C
14. PACKAGING: REEL 2000 PCS. PER
15. ▲ DENOTES CRITICAL PARAMETER
16. 2002/95/EC (ROHS) COMPLIANT




CIRCUIT: SPST

B

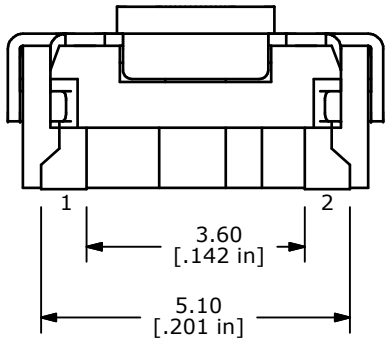


| REV | PCR NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| B | 20956 | ADD CIRCUIT SCHEMATIC | 1/8/13 | EBP |
| A | 19858 | RELEASE TO PRODUCTION | 04/18/11 | RC |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE TL4100AF120QG

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 8 = 1 | 4/18/2011 | rc | P004000 | B |