

20 Series

RoHS Compliant


NYLON 6.6

GENERAL PURPOSE

MATERIAL OPERATING TEMPERATURE: -40°C to +85°C

APPLICATION OPERATING TEMPERATURE: -10°C to +85°C

APPROVALS : c  us

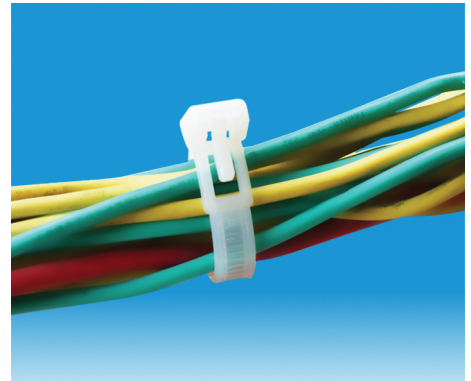

| Part Number | Width mm [Inch] | Length mm [Inch] | Max Bundle Diameter mm [Inch] | Min Loop Tensile Kg [lb] |
|-----------------|--------------------|---------------------|-------------------------------------|-----------------------------|
| S - 50lb | | | | |
| 20-S150 | 7.6 [.300] | 150 [6.0] | 40.3 [1.59] | 22 [50] |
| 20-S200 | 7.6 [.300] | 200 [8.0] | 55.6 [2.19] | 22 [50] |
| 20-S250 | 7.6 [.300] | 250 [10.0] | 71.8 [2.83] | 22 [50] |
| 20-S300 | 7.6 [.300] | 300 [11.8] | 88.1 [3.47] | 22 [50] |
| 20-S370 | 7.6 [.300] | 370 [14.5] | 109.9 [4.33] | 22 [50] |

PART NUMBER SYSTEM

