


used for: D-SUB

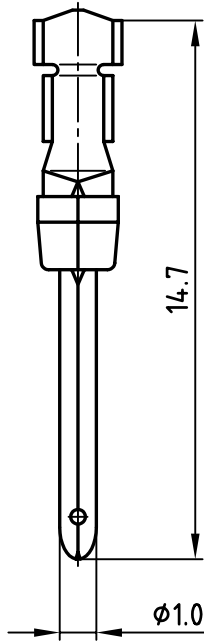

NOTES:

- Material stamped Contacts: phosphor bronze
- Finish: min. 8µ" hard-gold-plated in the contact area
- Temperature range: -55°C to +125°C
- Rated current: 7.5A
- Test voltage: 1000V eff. at 50Hz
- Contact resistance: <= 10mOhm
- Insulation resistance: >= 5000MOhm

Directive 2002/95/EC
„RoHS“
Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

			tolerance		
			2002	date	name
			drawn	11.01.	Parei
			appd.	11.01.	Resonnek
			norm		
			d-old		
rev.	description	date			

scale: 5:1	
material: SEE NOTES	
title: PLUG CONTACT CRIMP AWG24-20	
dwg no: AutoCAD 2000	DIN-A 4
16K2A430A	
part no: 161A13399X	sh: 1/1