

OV7676 VGA product brief



Cost-Effective VGA Sensor Delivers Best-In-Class Pixel Performance to Wide Range of Consumer Applications

lead free

available in a lead-free package

OmniVision's high performance OV7676 is a cost-effective 1/7.5-inch system-on-a-chip (SOC) VGA sensor that brings best-in-class pixel performance to a wide range of applications, including mobile phones, tablets, wearables, notebooks, and IP network cameras.

Utilizing OmniVision's 3-micron OmniPixel3-HS™ technology, the OV7676 achieves best-in-class low-light sensitivity, signal-to-noise ratio, full-well capacity (FWC), quantum efficiency and low-power consumption. The OV7676 supports serial peripheral interface (SPI) and digital video port (DVP) interface customization for both smartphone and feature phone platforms.


When used as a front-facing camera solution in smartphones, tablets and notebooks, the OV7676 also supports video-in-video functionality, allowing users to record and stitch together video being recorded simultaneously by the front- and rear-facing cameras.

The OV7676 fits into a 2.73 x 2.47 mm chip-scale package (CSP).

Find out more at www.ovt.com.

OmniVision

OV7676



Applications

- Mobile Phones
- Toys
- PC Mulitmedia
- Digital Still Cameras

Product Features

- support for image sizes: VGA (640x480), QVGA (320x240) and CIF (352x288)
- support for output formats: RAW RGB and YUV output with DVP and SPI port
- on-chip phase lock loop (PLL)
- built-in 1.8V regulator for digital block
- capable of maintaining register values at software power down
- programmable controls for frame rate, mirror and flip, AEC/AGC, and windowing
- support for horizontal and vertical sub-sampling
- automatic image control functions:
  - automatic exposure control (AEC)
  - automatic white balance (AWB)
  - automatic black level calibration (ABLC)
- image quality controls: defect pixel correction and lens shading correction
- support for black sun cancellation
- standard serial SCCB interface
- parallel I/O tri-state configurability and programmable polarity


Ordering Information

- **OV07676-H20A**
  (color, lead-free, 20-pin CSP5)

Product Specifications

- **active array size:** 640 x 480
- **power supply:**
  - **analog:** 2.8V ±5%
  - **core:** 1.8VDC ±5% (internal regulator)
  - **I/O:** 2.8V, 1.8V
- **power requirements:**
  - I_{DD-A}: 15 mA
  - I_{DD-IO}: 17 mA
  - **XSHUTDOWN:** <15 µA
- **temperature range:**
  - **operating:** -30°C to +70°C junction temperature
  - **stable image:** 0°C to +50°C junction temperature
- **output formats:** YUV422, RAW RGB
- **lens size:** 1/7.5"
- **lens chief ray angle:** 26.6°
- **input clock frequency:** 6 - 27 MHz
- **scan mode:** progressive
- **maximum image transfer rate:**
  - **VGA:** 30 fps
  - **QVGA:** 60 fps
  - **CIF:** 30 fps
- **sensitivity:** 1900 mV/lux-sec
- **shutter:** rolling shutter
- **max S/N ratio:** 38 dB
- **dynamic range:** 70.4 dB @ 8x gain
- **maximum exposure interval:** 506 x t_{ROW}
- **pixel size:** 3 µm x 3 µm
- **dark current:** 6 mV/sec @ 60°C junction temperature
- **image area:** 1962 µm x 1482 µm
- **package dimensions:**
  - **CSP5:** 2734 µm x 2474 µm

Functional Block Diagram

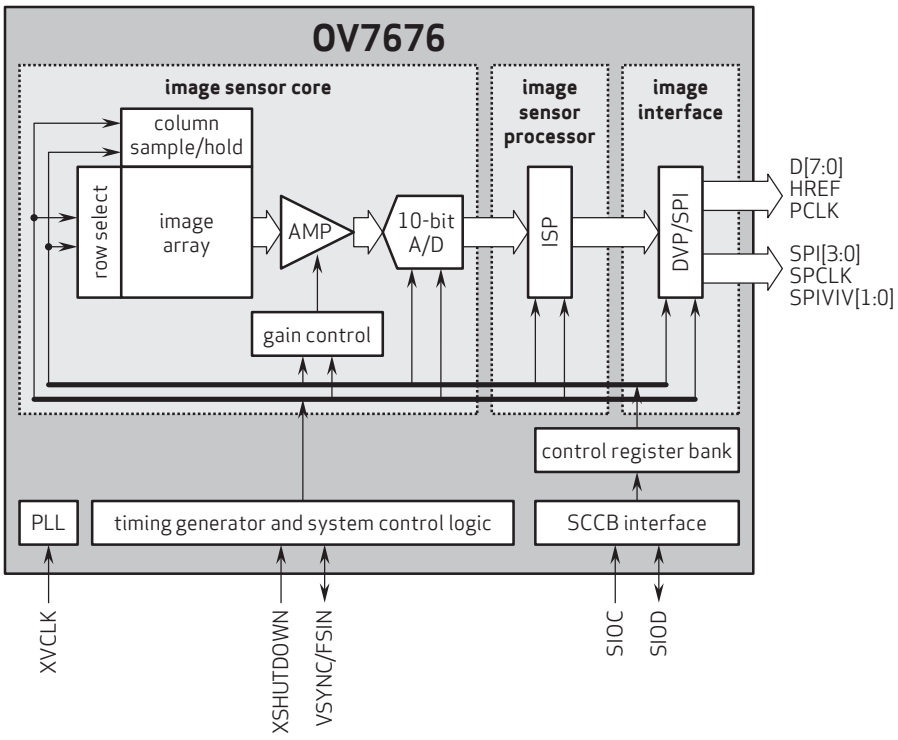

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: + 1 408 567 3000
Fax: + 1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniPixel are registered trademarks of OmniVision Technologies, Inc. OmniPixel3-HS is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

Version 1.4, May, 2015