Product data sheet
Characteristics

XZCPV0766L10
pre-wired connectors XZ - elbowed female - M8 - 3 pins - cable PVC 10m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	Elbowed female connector M8, 3 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	2 PNP LEDs
Cable length	10 m
Cable outer diameter	4.6 mm
Cable composition	3 x 0.25 mm²
Wire insulation material	PVC
[Ue] rated operational voltage	30 V AC 36 V DC
[In] rated current	3 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.36 kg

Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-25…80 °C static
Ambient air temperature for storage	-25…80 °C

Packing Units

Package 1 Weight	0.294 kg
Package 1 Height	0.350 dm
Package 1 width	1.800 dm
Package 1 Length	2.200 dm

Offer Sustainability


REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Contractual warranty

Warranty	18 months


Dimensions

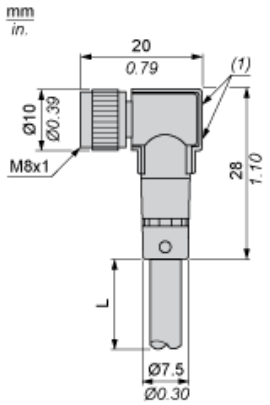

L : Lenght of cable
(1) 2 LEDs limited to 10…30 VDC max.

Connections and Schemes


Connector



BU : Blue
BN : Brown
BK : Black

Connections and Schemes

LED Connection



BN : Brown
BK : Black
BU : Blue
GN : Green
YW : Yellow
(1) Signal