

TO-126 Plastic-Encapsulate Transistors

BD234/236/238 TRANSISTOR (PNP)

FEATURES


- Power Dissipation

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit	
V _{CB0}	Collector-Base Voltage	BD234	-45	V
		BD236	-60	
		BD238	-100	
V _{CEO}	Collector-Emitter Voltage	BD234	-45	V
		BD236	-60	
		BD238	-80	
V _{EBO}	Emitter-Base Voltage	BD234	-5	V
		BD236	-5	
		BD238	-5	
I _C	Collector Current –Continuous	-2	A	
P _C	Collector Power Dissipation	1.25	W	
T _J	Junction Temperature	150	°C	
T _{stg}	Storage Temperature	-55-150	°C	

TO-126







1. EMITTER
2. COLLECTOR
3. BASE




ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	BD234 BD236 BD238	V _{(BR)CBO}	I _C =-1mA, I _E =0	-45 -60 -100	V
Collector-emitter breakdown voltage	BD234 BD236 BD238	V _{(BR)CEO}	I _C =-100mA, I _B =0	-45 -60 -80	V
Emitter-base breakdown voltage		V _{(BR)EBO}	I _E =-1mA, I _C =0	-5	V
Collector cut-off current	BD234 BD236 BD238	I _{CBO}	V _{CB} =-45V, I _E =0 V _{CB} =-60V, I _E =0 V _{CB} =-100V, I _E =0	-100	μA
Emitter cut-off current		I _{EBO}	V _{EB} =-5V, I _C =0	-1	mA
DC current gain		h _{FE(1)}	V _{CE} =-2V, I _C =-150mA	40	
		h _{FE(2)}	V _{CE} =-2V, I _C =-1A	25	
Collector-emitter saturation voltage		V _{CE(sat)}	I _C =-1A, I _B =-100mA	-0.6	V
Transition frequency		f _T	V _{CE} =-10V, I _C =-250mA, f = 10MHz	3	MHz

Typical Characteristics

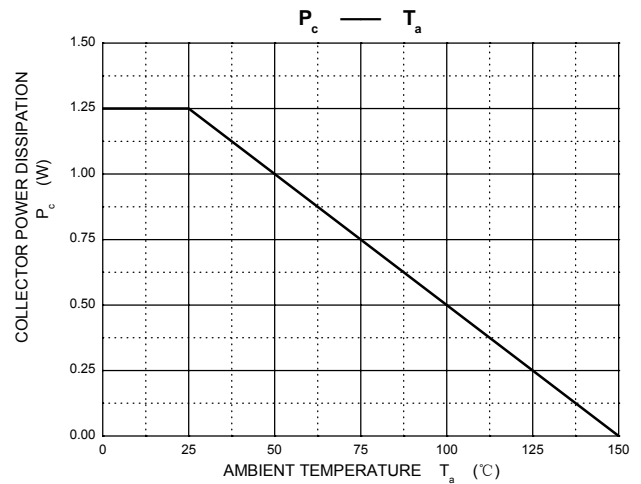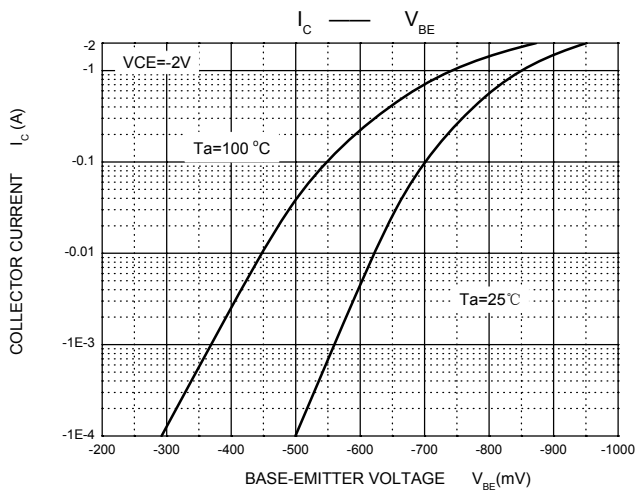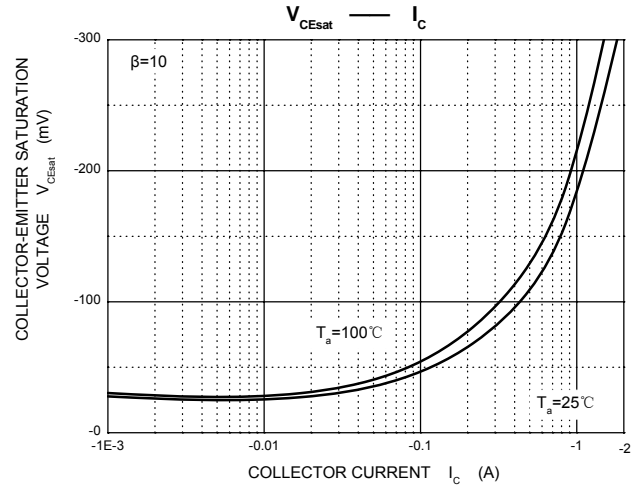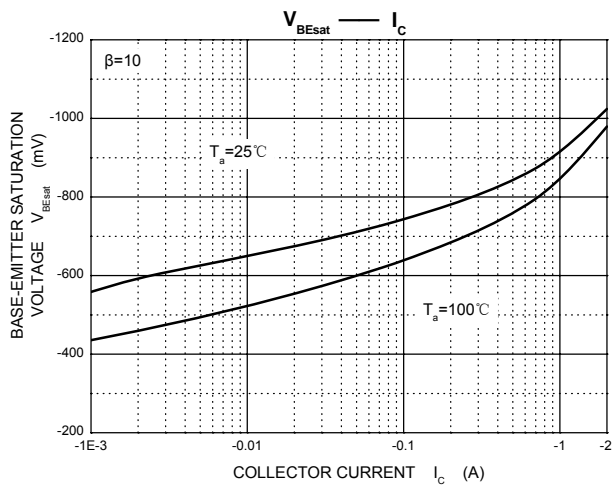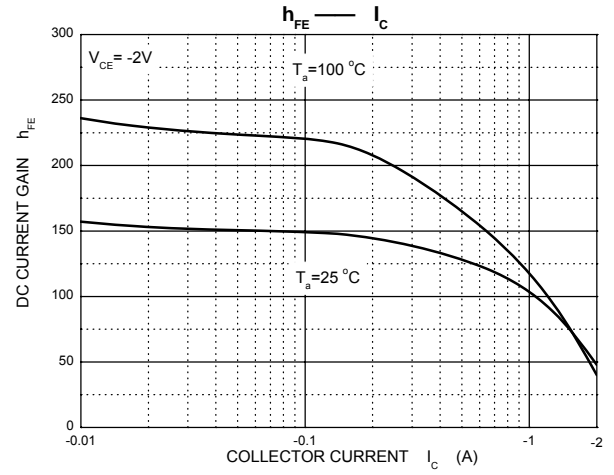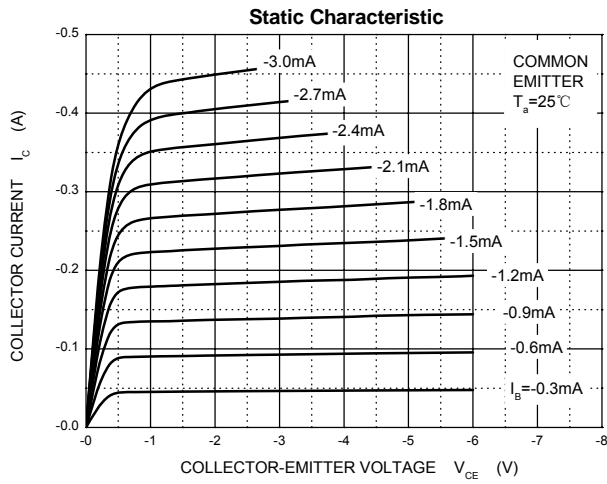

TO-126 Package Outline Dimensions

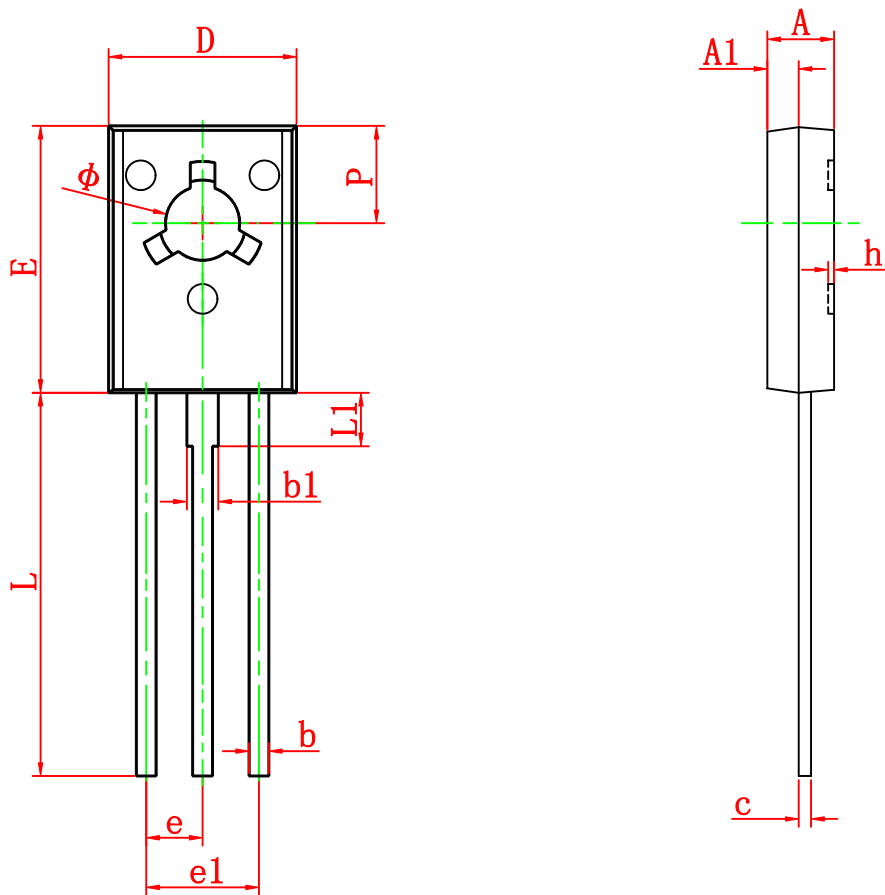

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.500	2.900	0.098	0.114
A1	1.100	1.500	0.043	0.059
b	0.660	0.860	0.026	0.034
b1	1.170	1.370	0.046	0.054
c	0.450	0.600	0.018	0.024
D	7.400	7.800	0.291	0.307
E	10.600	11.000	0.417	0.433
e	2.290 TYP		0.090 TYP	
e1	4.480	4.680	0.176	0.184
h	0.000	0.300	0.000	0.012
L	15.300	15.700	0.602	0.618
L1	2.100	2.300	0.083	0.091
P	3.900	4.100	0.154	0.161
Φ	3.000	3.200	0.118	0.126