
MATERIALS	
BODY	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PTFE
COUPLING NUT	BRASS NICKEL PLATED

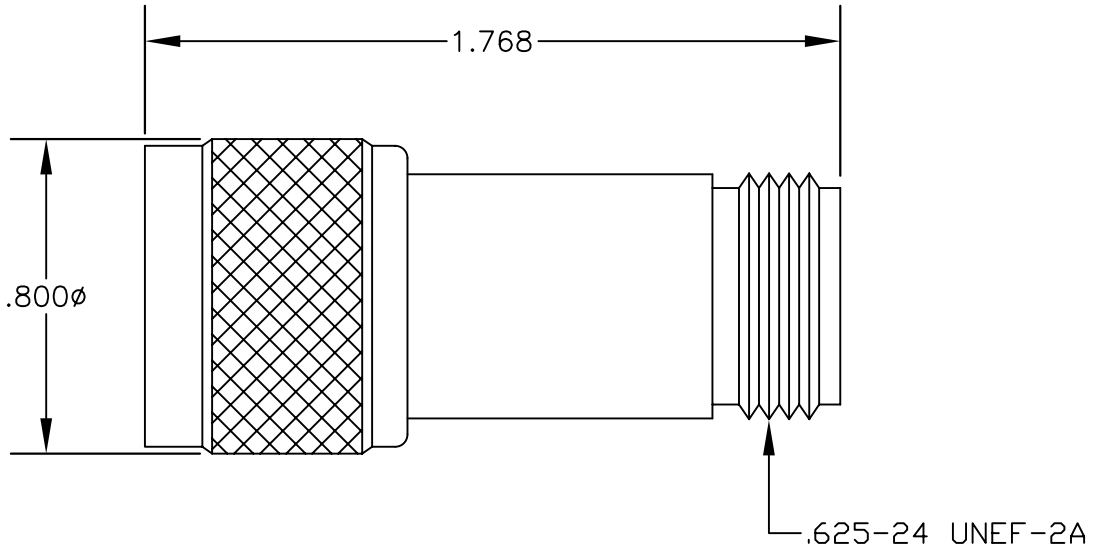

SPECIFICATIONS

FREQUENCY RANGE: 10 MHz TO 18 GHz
TYPE OF D.C BLOCK: INNER
INSERTION LOSS: .6 dB
VSWR: 1.35:1 MAXIMUM
WORKING VOLTAGE: 200 VOLTS

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

DWG TITLE
PE8213

DES. N MALE TO N FEMALE D.C BLOCK (INNER)
FREQUENCY RANGE: 10 MHz TO 18 GHz

SIZE A	FSCM NO. 53919	CAD FILE 112103	SCALE N/A		127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.