T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Reinforced Insulation Per EN 41003/EN 60950

Turns Ratio (± 5%)	1CT:1.15CT & 1CT: 1CT

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.6 & 1.6		mH
Capacitance ($C_{W/W}$)		15 & 15	pF
Primary DC Resistance		1.1 & 1.0	ohms
Secondary DC Resistance		1.1 & 0.9	ohms

Primary Pins 16-14 & 6-8


Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

3000 V_{RMS} Isolation (Hi-Pot)


Parts shipped in anti-static tubes.

Tape and Reel available.

PHYSICAL DIMENSIONS All dimensions in inches (mm)

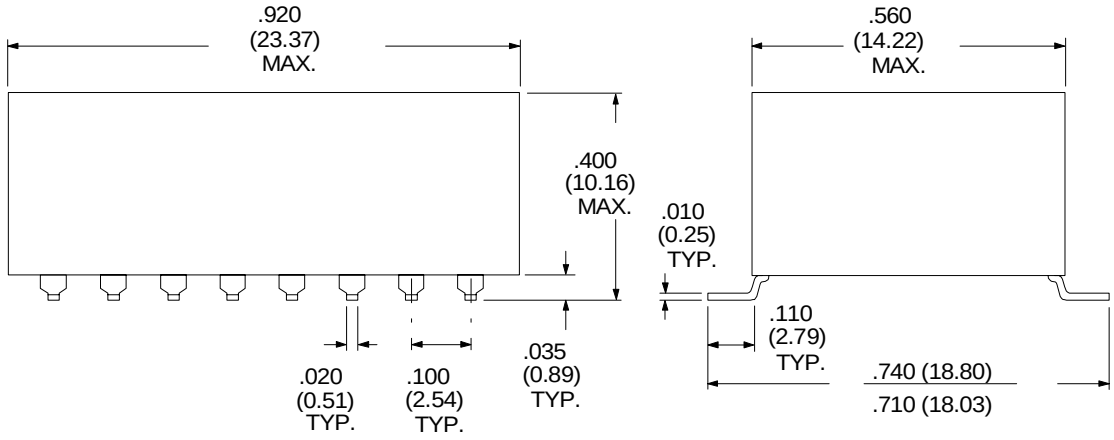

Schematic Diagram

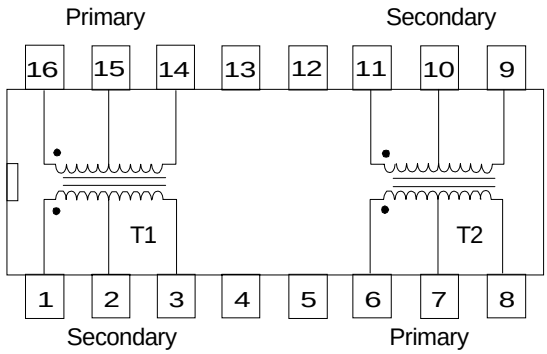

RHOMBUS P/N: **T-15809**	
CUST P/N:	NAME:
DATE: **5/27/99**	SHEET: 1 OF 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com