

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 210g only
- Efficiency 77%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C



SPECIFICATION

Model		SA0612
Item		
Output Voltage		12V
Output Current		1.7A
Input Voltage		AC 90~264V
Input Frequency		47~63Hz
Input Current		0.8A Maximum
Inrush Current		40A Maximum
Line Regulation		2% Maximum
Load Regulation		± 5%
Ripple & Noise		1% Maximum
Efficiency		77% Typical
Temperature Coefficient		0.05%/°C
Over-Voltage Protection		24V Maximum
Operating Temperature		0~40°C
Storage Temperature		-20~85°C
Safety Description	Fig. A	UL, CUL, LPS, CE
	Fig. U	UL, CUL, TUV, RCM, CE, CCIB, CB, LPS

(*) : Under Development

(I/P) : In Process


ORDERING INFORMATION

SA0612 - A - 1 A

Output Plug List

Mechanical

MECHANICAL

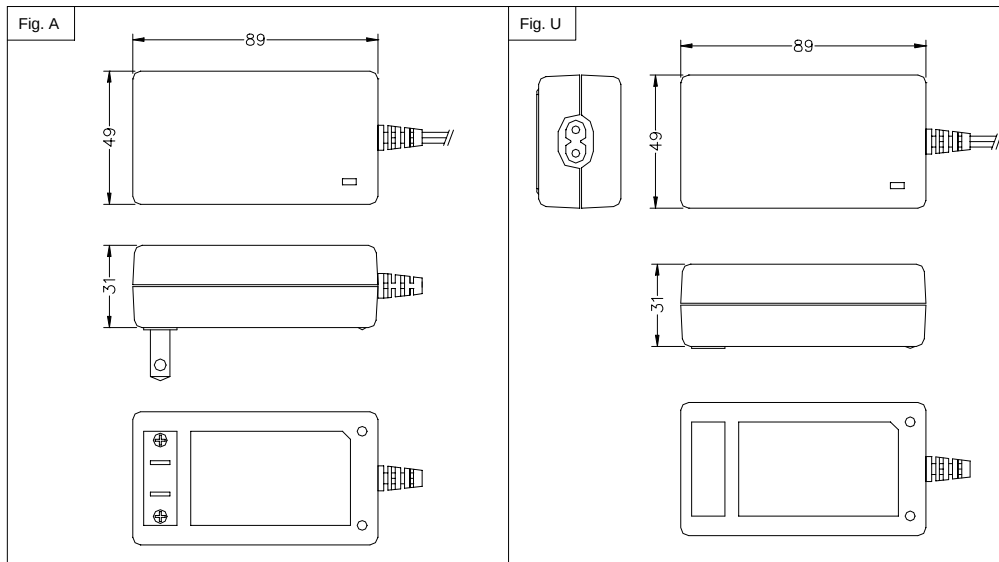

Unit: m.m.

Standard Output Cable:
20AWG, UL 2468, 1800mm, EMI Core

<

Bothhand USA. e-mail: sales@bothhandusa.com <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434