

产品规格书

型号: KH-PH-PT2.0

技术参数 SPECIFICATIONS

线数 (Poles): 2~30

适用线规 (Applicable wires): AWG30#~24#

适用基板厚度 (Applicable PC board thickness): 1.6mm

温度范围 (Temperature range): -25°C~85°C

额定电压 (Voltage rating): 250V.AC/DC

额定电流 (Current rating): 2A

接触电阻 (Contact resistance): $\leq 0.02\Omega$


绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$



耐压 (Withstand voltage): 800V.AC/1min

材 料 MATERIAL

端子 (Terminal): 磷青铜 (Phos.bronze Tin/plated)

PH-PT

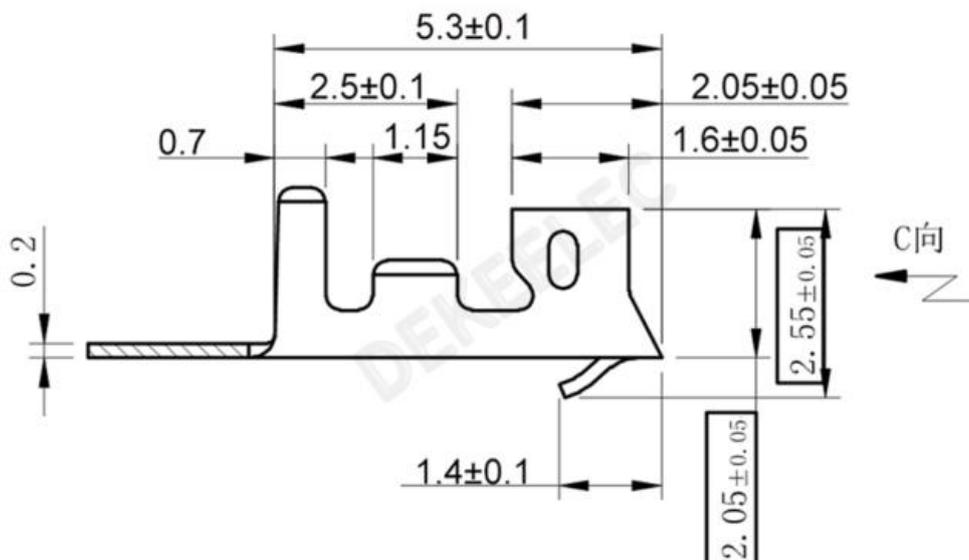

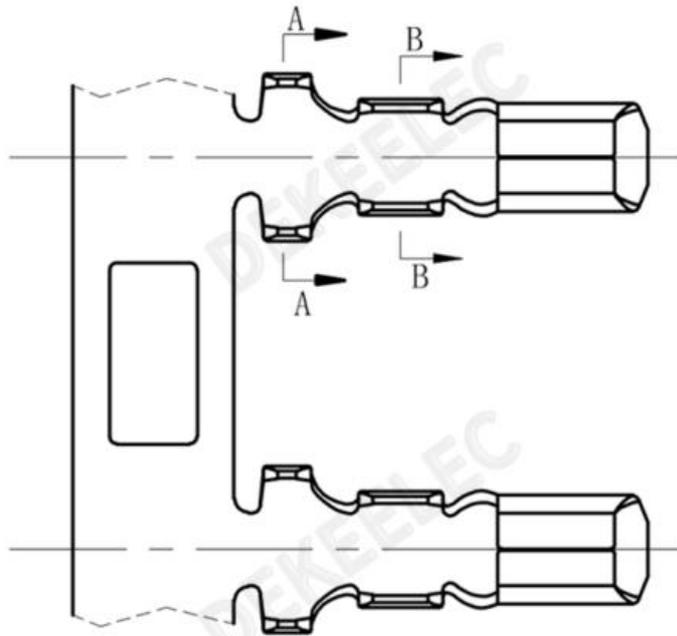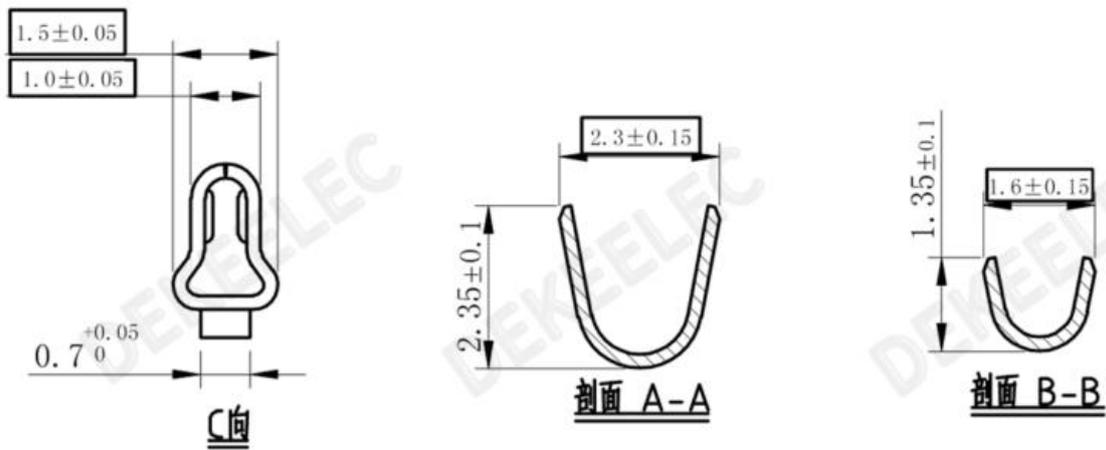

端子Terminal(PH)

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins
	mm ²	AWG#	mm
PH-PT	0.05~0.22	30~24	0.9~1.5