

SAW Filter 433. 0MHz

Model: TA1473A

Part No: MP04693

Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -30°C to +72°C
4. Storage Temperature: -30°C to +85°C


B. ELECTRICAL CHARACTERISTICS:

1. Terminating source impedance (single ended): $Z_S = 50\Omega$
2. Terminating load impedance (single ended): $Z_L = 50\Omega$

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency F_c	MHz	-	433	-	-
Min. Insertion Loss IL min	dB	-	1.3	2.8	-
Bandwidth BW -3dB	dB	20	23.6	-	-
Attenuation (reference level from 0dB)					
10 ~ 410MHz	dB	35	53	-	-
470 ~ 680MHz	dB	35	46	-	-
Temperature Coefficient of Frequency	ppm/°C	-	-36	-	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

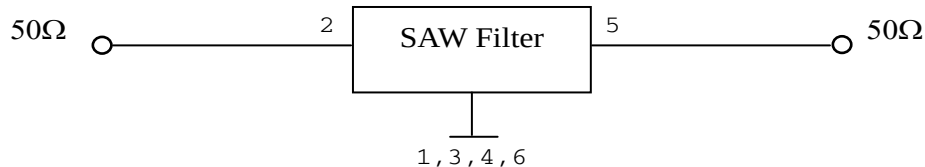


SAW Filter 433.0MHz

Model: TA1473A


Part No: MP04693

Rev No: 1

D. OUTLINE DRAWING:

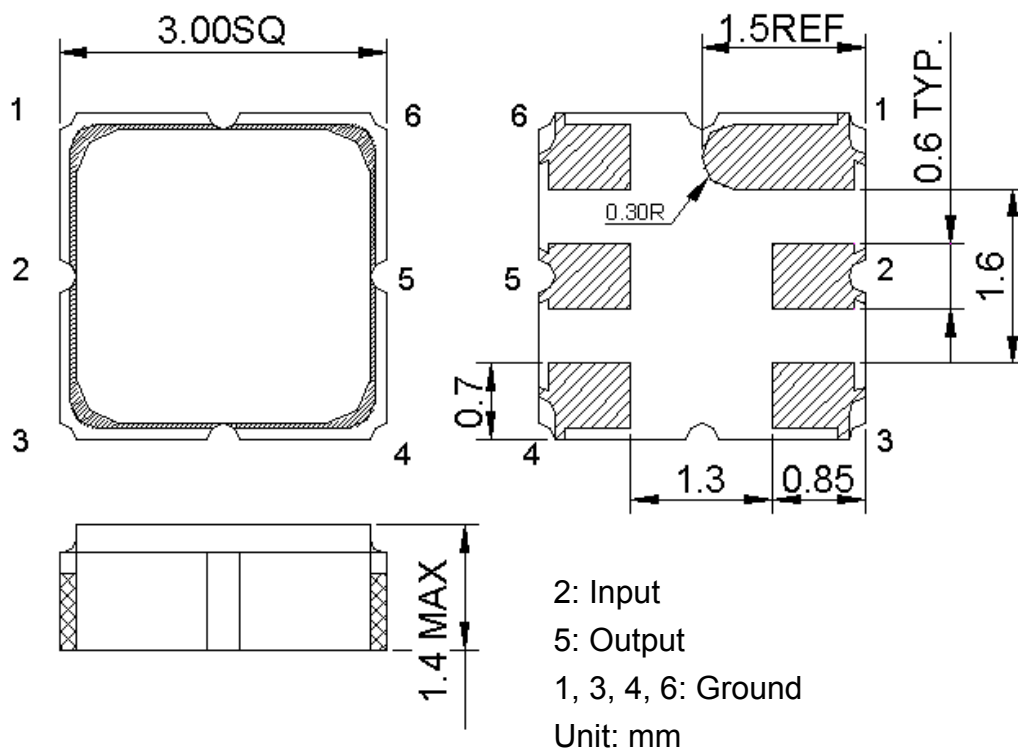


E. PCB FOOTPRINT:

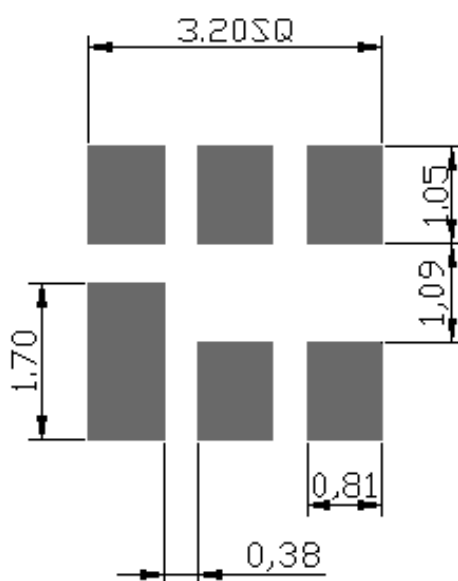

SAW Filter 433.0MHz
Part No: MP04693

Model: TA1473A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

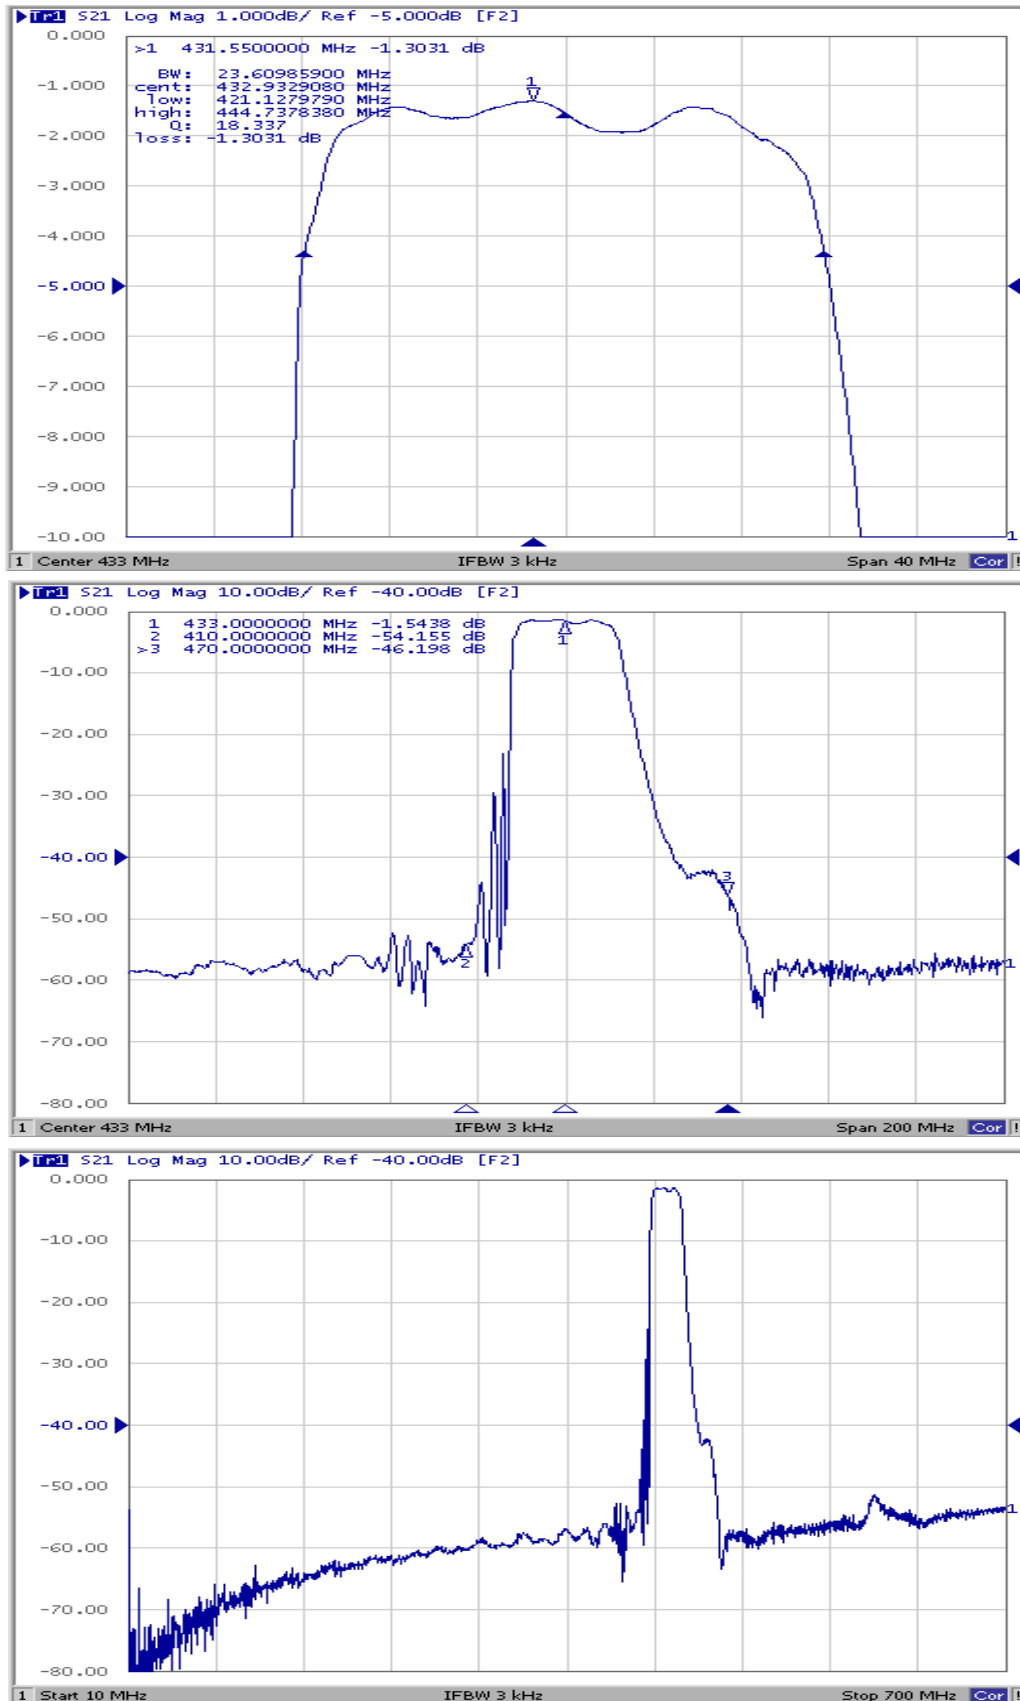


SAW Filter 433.0MHz
Part No: MP04693


Model: TA1473A
Rev No: 1

G. PACKING:

1. Reel Dimension

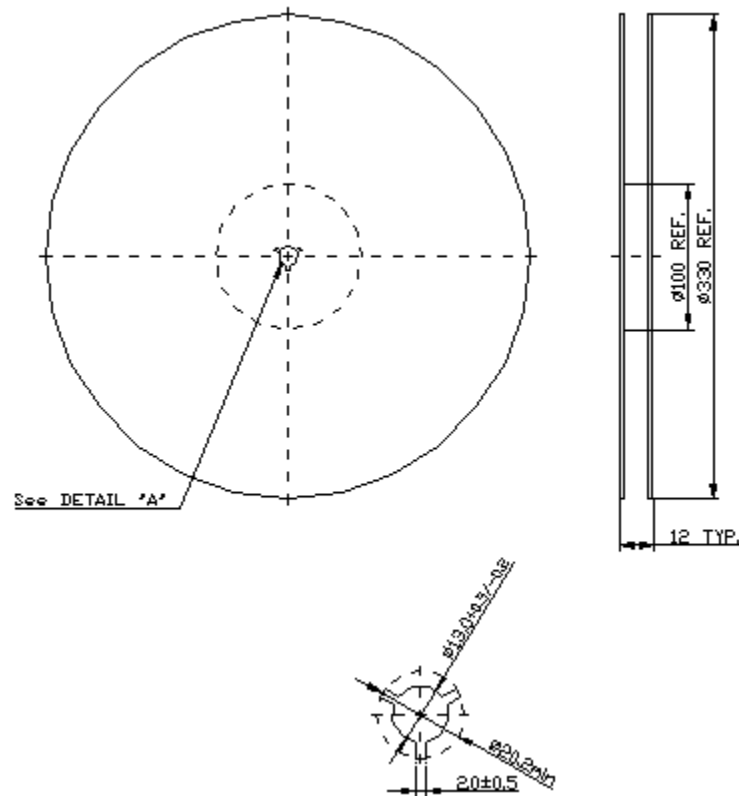

2. Tape Dimension

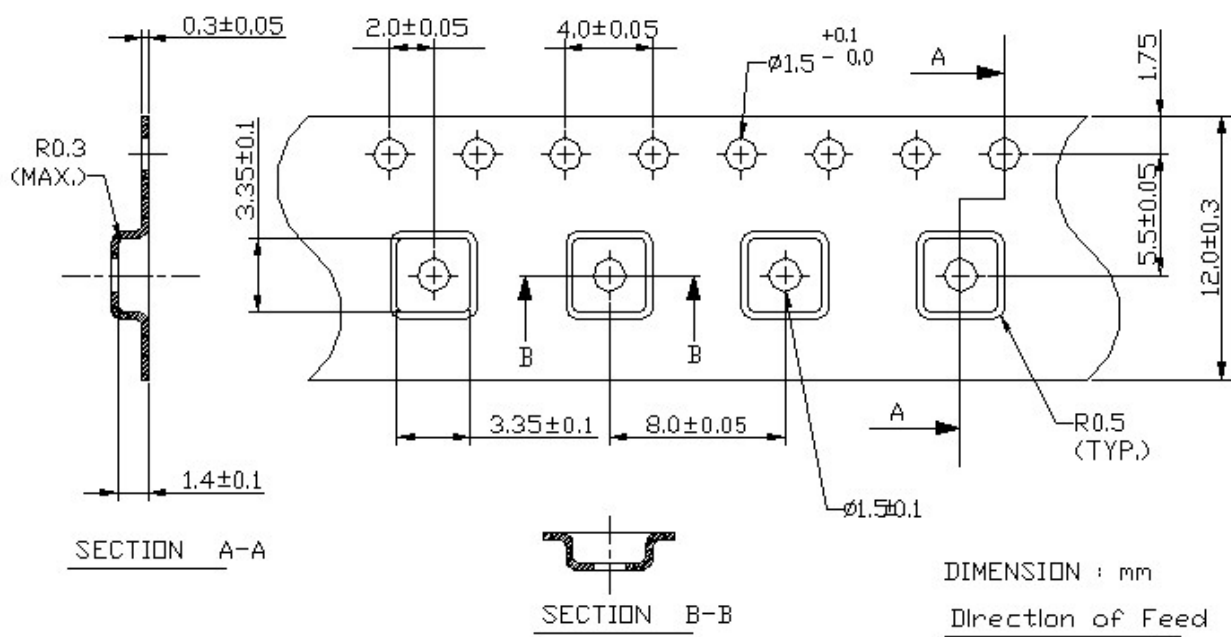

SAW Filter 433.0MHz

Model: TA1473A

Part No: MP04693

Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

1. Preheating shall be fixed at 150 ~ 180°C for 60 ~ 90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50 ~ 80 seconds and at 245 ~ 260°C peak (min. 10sec).
4. Time: 2 times.

