



LR9280

Preliminary

CMOS IC

150mA LDO REGULATOR

DESCRIPTION

The UTC **LR9280** is a typical LDO (linear regulator) with the features of high output voltage accuracy, low supply current, low ON-resistance. Internally, there're many functions of UTC **LR9280** which can be seen in the block figure. There are a voltage reference unit, an error amplifier, resistor-net for voltage setting, a current limit circuit, and a chip enable circuit in each UTC **LR9280**.

The output voltage of these ICs is fixed with high accuracy. B version has a chip enable pin, therefore low consumption current standby mode can be realized with the pin.

FEATURES


- * Output voltage accuracy ($\pm 2.0\%$)
- * Output voltage Range (1.2V~4.0V)
- * Dropout voltage (TYP=0.25V)(I_{OUT}=150mA 3.0V Output type)
- * Line regulation (TYP=0.05%/V)
- * Temperature-Drift Coefficient of Output Voltage (TYP= ± 100 ppm/ $^{\circ}$ C)
- * Ceramic capacitors are recommended to be used with this IC (1 μ F)

ORDERING INFORMATION



Ordering Number		Package	Packing
Lead Free	Halogen Free		
LR9280CL-xx-AE2-R	LR9280CG-xx-AE2-R	SOT-23-3	Tape Reel
LR9280CL-xx-AE3-R	LR9280CG-xx-AE3-R	SOT-23	Tape Reel
LR9280xL-xx-AE5-R	LR9280xG-xx-AE5-R	SOT-23-5	Tape Reel
LR9280xL-xx-AF5-R	LR9280xG-xx-AF5-R	SOT-25	Tape Reel

Note: xx: Output Voltage, refer to Marking Information.


<p>LR9280xG-xx-AE2-R</p>	<p>(1) R: Tape Reel (2) AE2: SOT-23-3, AE3: SOT-23, AE5: SOT-23-5 AF5: SOT-25 (3) xx: refer to Marking Information (4) G: Halogen Free and Lead Free, L: Lead Free (5) B: Active high type, C: Without chip enable circuit (For 5 Pin Package)</p>
--------------------------	--

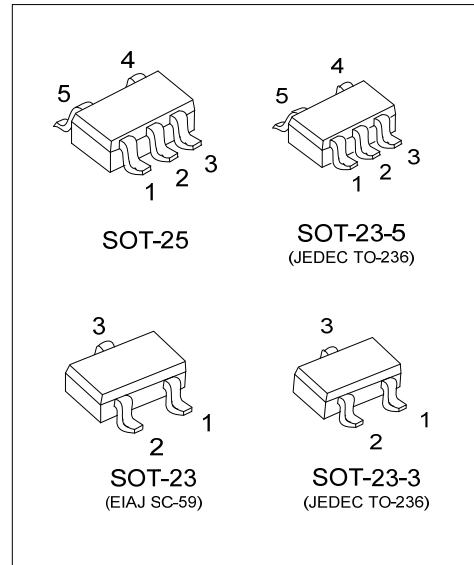

MARKING INFORMATION

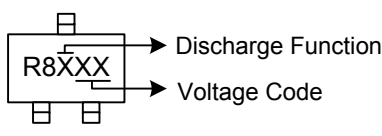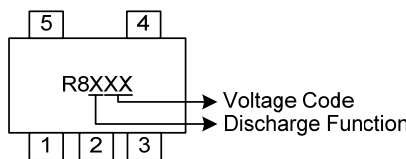PACKAGE	VOLTAGE CODE	MARKING
SOT-23-3 SOT-23	12: 1.2V 15: 1.5V 18: 1.8V 25: 2.5V 28: 2.8V	
SOT-23-5 SOT-25	30: 3.0V 33: 3.3V 36: 3.6V 40: 4.0V	



PIN CONFIGURATION

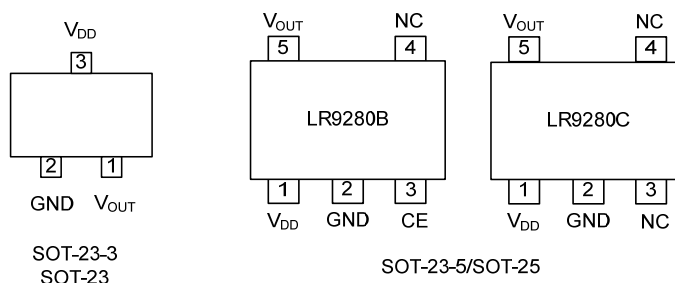

PIN DESCRIPTION

SOT-23-3 SOT-23	PIN NO.		PIN NAME	DESCRIPTION
	SOT-23-5/SOT-25			
	LR9280B	LR9280C		
1	5	5	V_{OUT}	Output pin
3	1	1	V_{DD}	Input pin
2	2	2	GND	Ground pin
-	3	-	CE	Chip Enable Pin
-	4	3, 4	NC	No Connection

■ BLOCK DIAGRAM

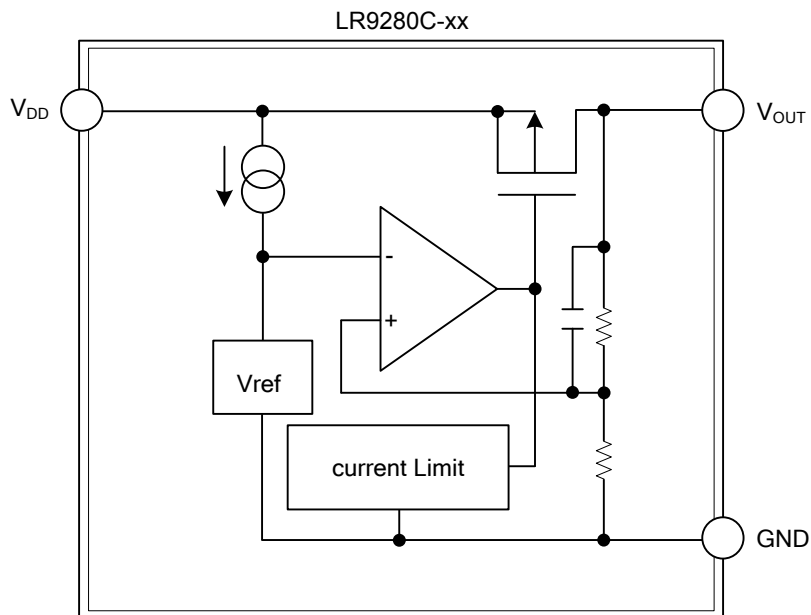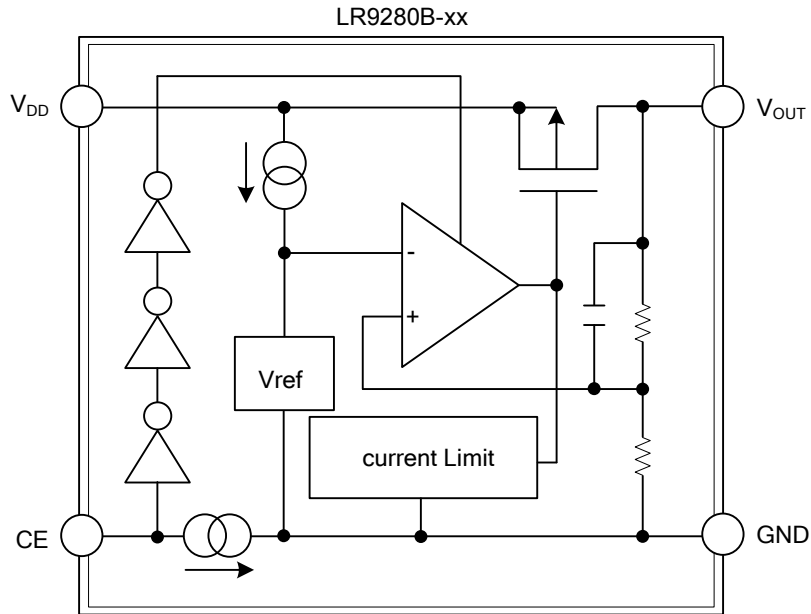

■ ABSOLUTE MAXIMUM RATING


PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	6.5	V
Input Voltage(CE Pin)	V_{CE}	6.5	V
Output Voltage	V_{OUT}	$-0.3 \sim V_{IN}+0.3$	V
Output Current	I_{OUT}	150	mA
Power Dissipation	P_D	420	mW
Operating Temperature	T_{OPR}	$-40 \sim +85$	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	$-55 \sim +125$	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.


■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Output Voltage	V_{OUT}	$V_{IN}=\text{Set } V_{OUT}+1\text{V}, 1\mu\text{A} \leq I_{OUT} \leq 30\text{mA}$	x0.980		x1.020	V	
Dropout Voltage	V_{DIF}	$I_{OUT}=150\text{mA}$	$1.2 \leq V_{OUT} < 1.3$		0.85	1.20	V
			$1.3 \leq V_{OUT} < 1.4$		0.75	1.10	V
			$1.4 \leq V_{OUT} < 1.5$		0.65	1.00	V
			$1.5 \leq V_{OUT} < 1.7$		0.60	0.90	V
			$1.7 \leq V_{OUT} < 1.9$		0.50	0.75	V
			$1.9 \leq V_{OUT} < 2.1$		0.40	0.65	V
			$2.1 \leq V_{OUT} < 2.8$		0.35	0.55	V
			$2.8 \leq V_{OUT} \leq 3.6$		0.25	0.40	V
		$3.6 \leq V_{OUT} \leq 4.0$		0.20	0.35	V	
Input Voltage	V_{IN}				6.0	V	
Supply Current	I_{SS}	$V_{IN}-V_{OUT}=1.0\text{V}, I_{OUT}=0\text{mA}$		0.7	1.5	μA	
Standby Current	I_{STB}	$V_{IN}-V_{OUT}=1.0\text{V}, V_{CE}=\text{GND}$		0.1	1.0	μA	
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	$V_{IN}-V_{OUT}=1.0\text{V} (V_{OUT} \geq 1.5\text{V})$ $V_{IN}=2.4\text{V} (V_{OUT} < 1.5\text{V})$ $1\mu\text{A} \leq I_{OUT} \leq 150\text{mA}$		20	40	mV	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	$I_{OUT}=30\text{mA}$ $V_{OUT}+0.5\text{V} \leq V_{IN} \leq 6.0\text{V}$ $(V_{OUT} \geq 1.5\text{V}), 2.0\text{V} \leq V_{IN} \leq 6.0\text{V}$ $(1.2\text{V} \leq V_{OUT} \leq 1.4\text{V})$		0.05	0.20	%/V	
Output Voltage Temperature Coefficient	$\Delta V_{OUT}/\Delta T_{OPT}$	$I_{OUT}=30\text{mA}, -40^{\circ}\text{C} \leq T_{OPT} \leq 85^{\circ}\text{C}$		± 100		ppm/ $^{\circ}\text{C}$	
Short Current Limit	I_{SC}	$V_{OUT}=0\text{V}$		50		mA	
CE Pull-down Constant Current	I_{PD}	LR9280B		0.35		μA	
CE Input Voltage "H"	V_{CEH}	LR9280B	1.2		6.0	V	
CE Input Voltage "L"	V_{CEL}	LR9280B	0.0		0.3	V	


■ TEST CIRCUITS

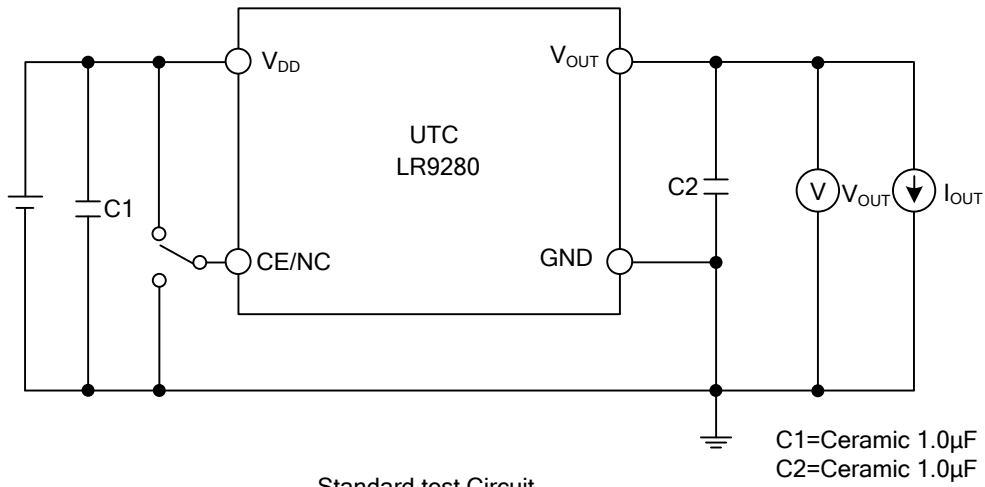

Standard test Circuit

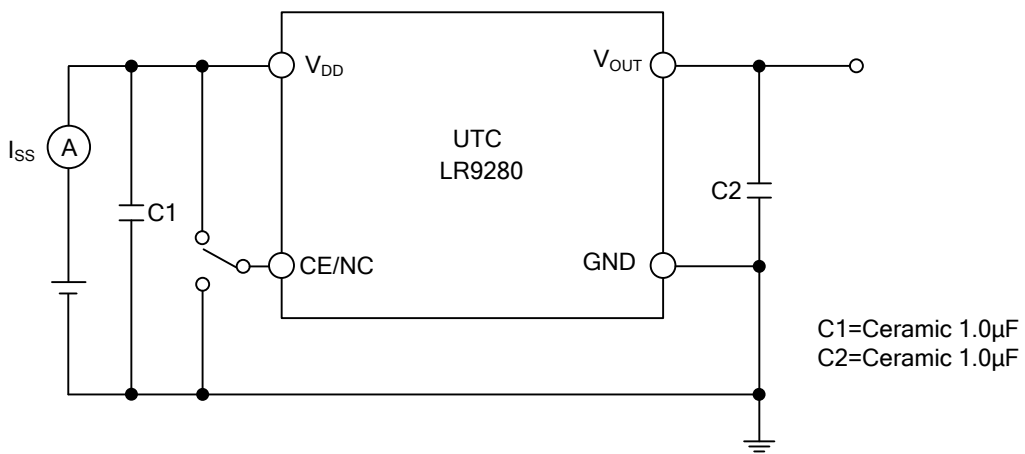


Supply Current Test Circuit

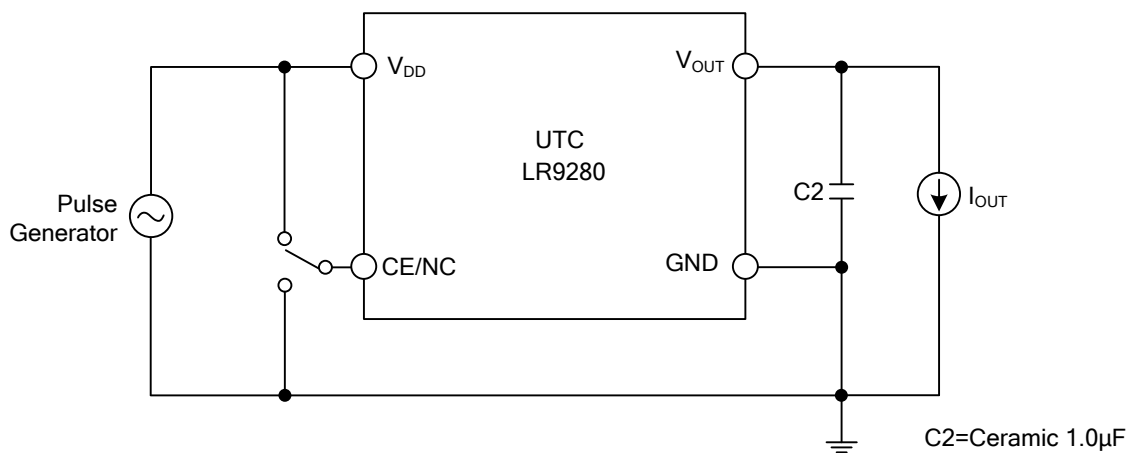

Ripple Rejection, Line Transient Response Test Circuit

■ TYPICAL APPLICATION CIRCUIT

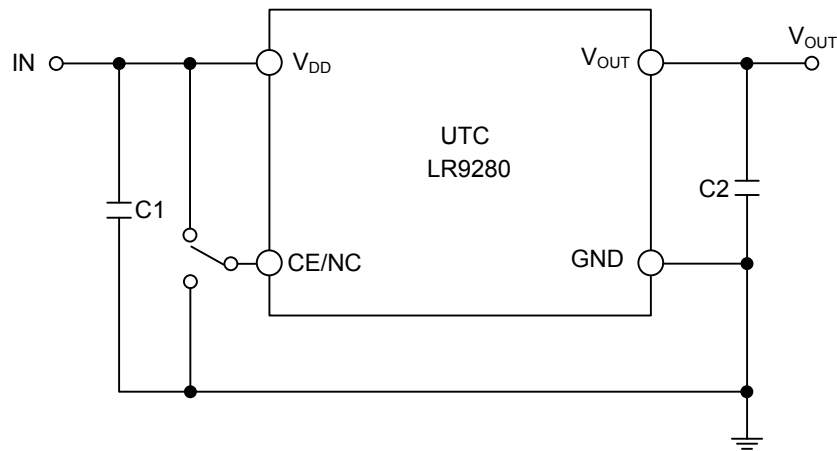

(External Components)
Output Capacitor
Ceramic Capacitor 1 μ F

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.