# Support pour Relais SP/ST

# Socket for SP/ST relay

# ESD05000

Screw terminal sockets for use with SPA/SPD and STA/STD/STN solid state relays compatible with Electromechanical relays, having 5mm pin spacing. Mounting can be arranged either directly on panel or via DIN-46377 Omega rail. The screw terminals have jaw-type rising clamps offering touch-proof (IP20) protection. Their reduced lateral dimension is ideally suited on high density DIN-rail applications.
An optional plastic retaining spring, acting also as a relay ejecting device (1 model for SP and 1 model for ST) , and a clip-on identification tab are available to complete the series



## Dimensions

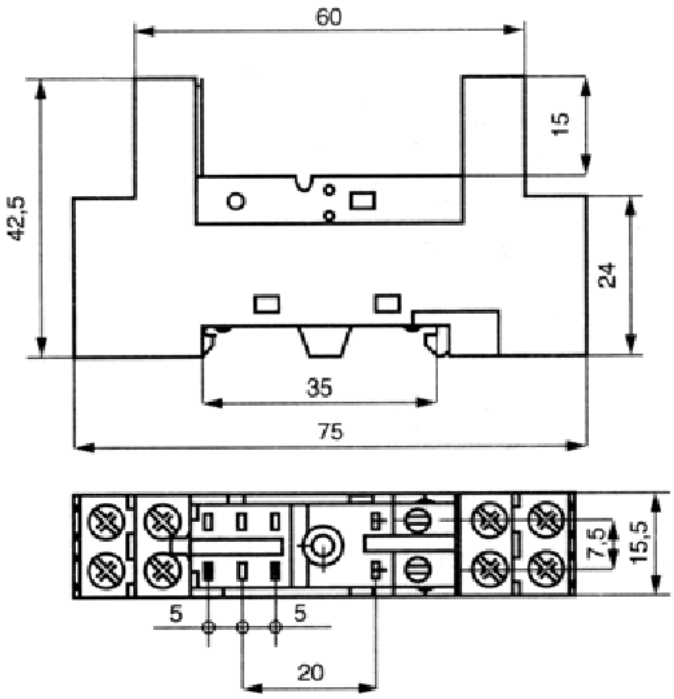


| | |
|---|---|
| Specifications : | 12A 250VAC (*) |
| Insulation resistance | >1000Mohms |
| Dielectric strength | >3KV |
| UL, CSA | |

(*) see SSR specifications

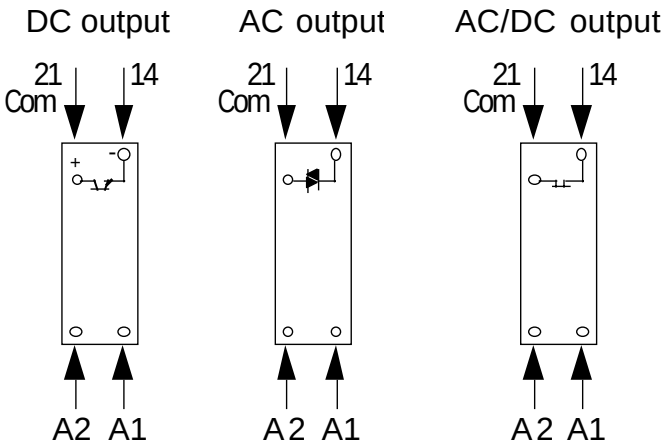


AFAQ ISO 9001 N° 1993/1106a

Proud to serve you

All technical caracteristics are subject to change without previous notice.
Caractéristiques sujettes à modifications sans préavis.

celduc® relais

www.celduc.com