


121-191 Annular Convuluted Tubing with External Braid and Jacket



Series 72
Guardian

For environmental EMI/RFI applications

How To Order

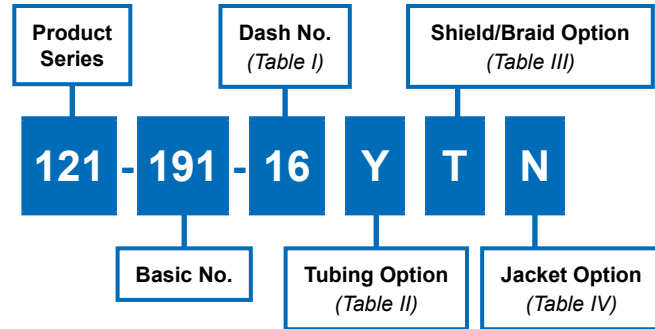


Dash No	A Inside Dia		B Outside Dia	
	Min	Max	Min	Max
09	.24 (6.1)	.28 (7.1)	.54 (13.7)	.58 (14.7)
12	.33 (8.4)	.37 (9.4)	.64 (16.3)	.68 (17.3)
16	.45 (11.4)	.50 (12.7)	.76 (19.3)	.82 (20.8)
20	.57 (14.5)	.62 (15.7)	.87 (22.1)	.93 (23.6)
24	.69 (17.5)	.75 (19.1)	1.04 (26.4)	1.10 (27.9)
28	.81 (20.6)	.87 (22.1)	1.16 (29.4)	1.24 (31.5)
32	.93 (23.6)	1.00 (25.4)	1.28 (32.5)	1.36 (34.5)
40	1.18 (30.0)	1.25 (31.8)	1.52 (38.6)	1.60 (40.6)
52	1.56 (39.6)	1.63 (41.4)	1.93 (49.0)	2.01 (51.1)

Y	Kynar/Thermally stabilized
V	PVDF/Not thermally stabilized
S	Siltem/Medium duty

T	Tin/Copper
C	Stainless Steel
N	Nickel Copper
L	ArmorLite™
D	Dacron
M	Nomex
E	AmberStrand® 100%
F	AmberStrand® 75%/25%

N	Neoprene
H	Hypalon
E	EPDM
V	Viton
B	Duraelectric, black
G	Bluejacket, Gray
TN	Duraelectric, Desert Tan

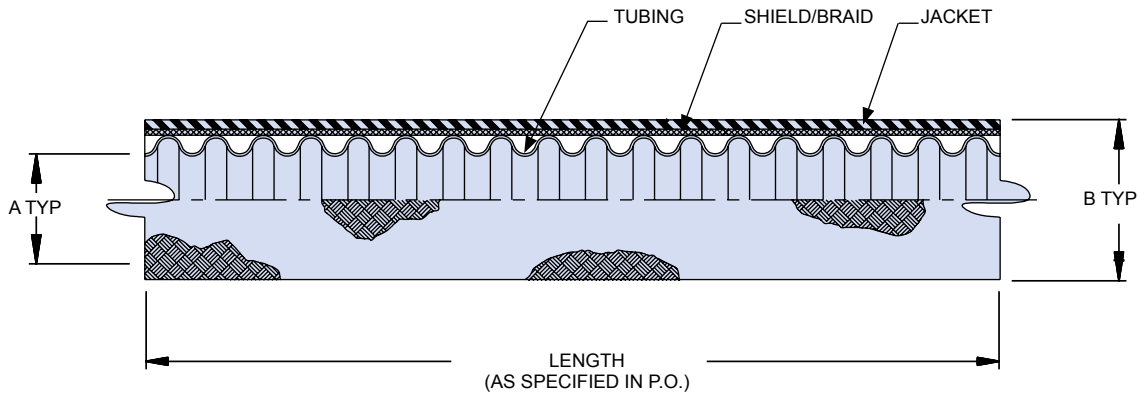

Packaging

121-191 braided and jacketed conduit is typically supplied in 50 foot lengths. Longer lengths are available—consult factory for additional information. Unless otherwise specified, Glenair packages optimal lengths of product based on weight, size, and commercial carrier specifications. If necessary, consult factory for additional information on package weight restrictions.