
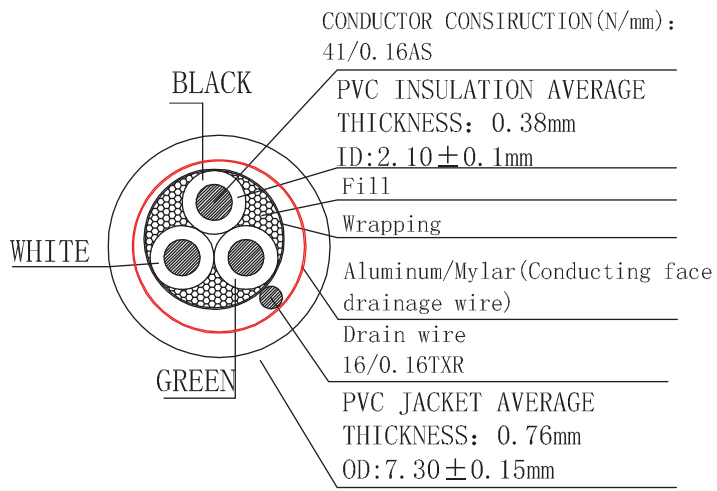
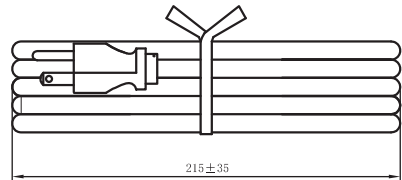
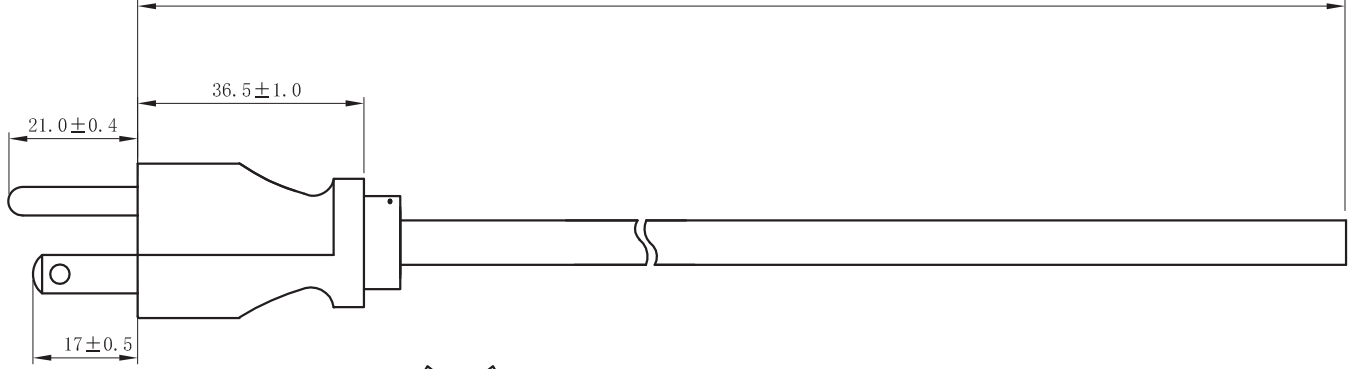


A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

3020±50

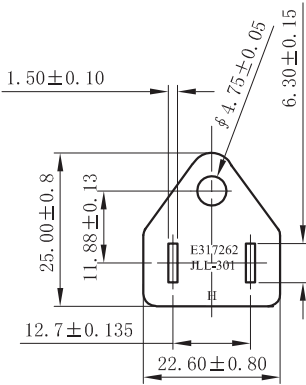

Material:

- E243711(UL) SVT 3 x 18AWG(0.824MM²) VW-1 Shielded, 105°C 300V
- CSA 228191 SVT 3 x 18AWG(0.824MM²) FT2 Shielded 105°C 300V -LF-
- Jacket Color: Black
- E- Green; L - Black; N - White

Electrical:

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

Unit: MM

Scale	1:1						Name
TOLERANCE					Drawn	12.27.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		



Item No.	AK500-OE-7-3-R	
Title	Power Cord - SVT/Open End, Shielded, 105°C, 18AWG, 3 Meters	
Drawing No.		rev00
Replace		
	Sheet	