
TOSHIBA Transistor Silicon NPN Epitaxial Type

TPC6501

High-Speed Switching Applications
DC-DC Converter Applications
Strobe Applications

- High DC current gain: h_{FE} = 400 to 1000 (I_C = 0.2 A)
- Low collector-emitter saturation voltage: $V_{CE\ (sat)}$ = 0.12 V (max)
- High-speed switching: t_f = 25 ns (typ.)

Unit: mm

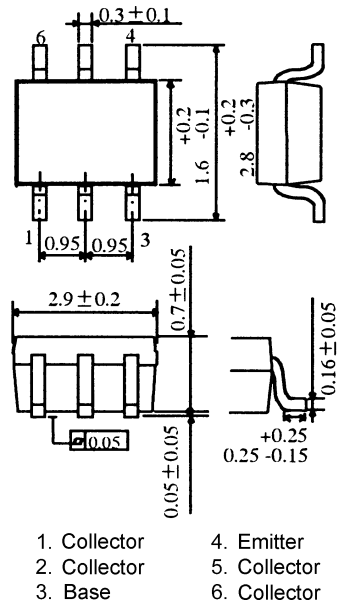

JEDEC	—
JEITA	—
TOSHIBA	2-3T1A

Weight: 0.011 g (typ.)

Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit
Collector-base voltage		V_{CBO}	20	V
Collector-emitter voltage		V_{CEO}	10	V
Emitter-base voltage		V_{EBO}	7	V
Collector current	DC	I_C	2.0	A
	Pulse	I_{CP}	3.5	
Base current		I_B	200	mA
Collector power dissipation	DC	P_C	0.8	W
	t = 10 s	(Note)	1.6	
Junction temperature		T_j	150	°C
Storage temperature range		T_{stg}	−55 to 150	°C

Note: Mounted on FR4 board (glass epoxy, 1.6 mm thick, Cu area: 645 mm^2)

Electrical Characteristics (Ta = 25°C)

Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current		I_{CBO}	V_{CB} = 20 V, I_E = 0	—	—	100	nA
Emitter cut-off current		I_{EBO}	V_{EB} = 7 V, I_C = 0	—	—	100	nA
Collector-emitter breakdown voltage		$V_{(BR)\ CEO}$	I_C = 10 mA, I_B = 0	10	—	—	V
DC current gain		h_{FE} (1)	V_{CE} = 2 V, I_C = 0.2 A	400	—	1000	
		h_{FE} (2)	V_{CE} = 2 V, I_C = 0.6 A	200	—	—	
Collector-emitter saturation voltage		$V_{CE\ (sat)}$	I_C = 0.6 A, I_B = 12 mA	—	—	0.12	V
Base-emitter saturation voltage		$V_{BE\ (sat)}$	I_C = 0.6 A, I_B = 12 mA	—	—	1.10	V
Switching time	Rise time	t_r	See Figure 1 circuit diagram.	—	60	—	ns
	Storage time	t_{stg}	$V_{CC} \simeq$ 6 V, R_L = 10 Ω	—	215	—	
	Fall time	t_f	$I_{B1} = -I_{B2}$ = 12 mA	—	25	—	

Circuit Configuration **Marking**



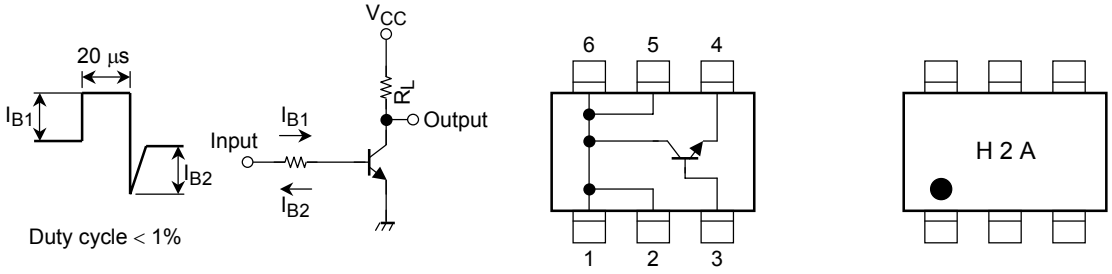


Figure 1 Switching Time Test Circuit & Timing Chart


$I_C - V_{CE}$

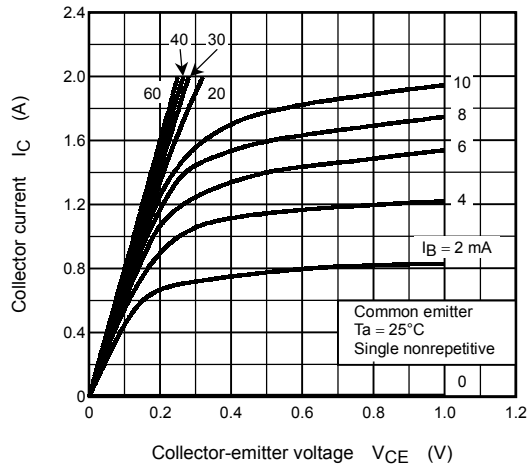


$h_{FE} - I_C$

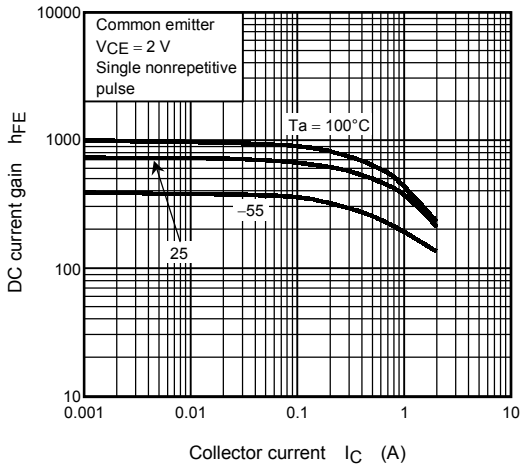


$V_{CE\ (sat)} - I_C$

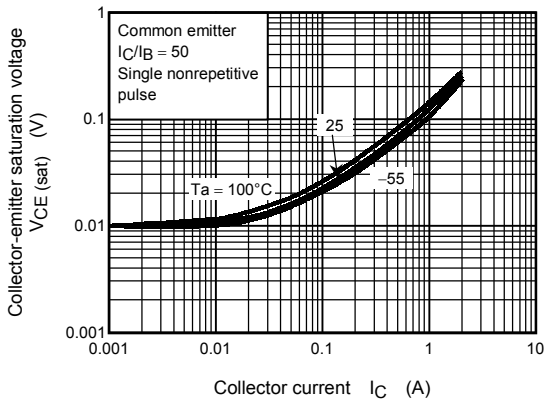


$V_{BE\ (sat)} - I_C$

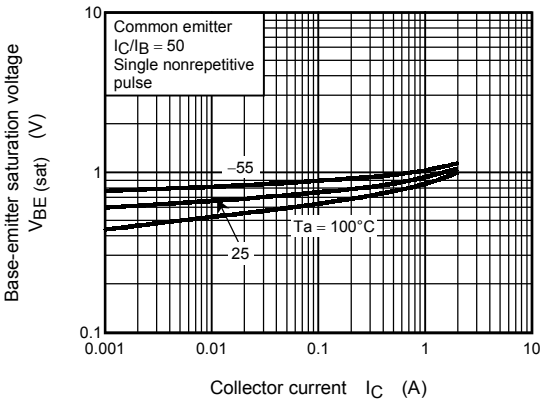


$I_C - V_{BE}$

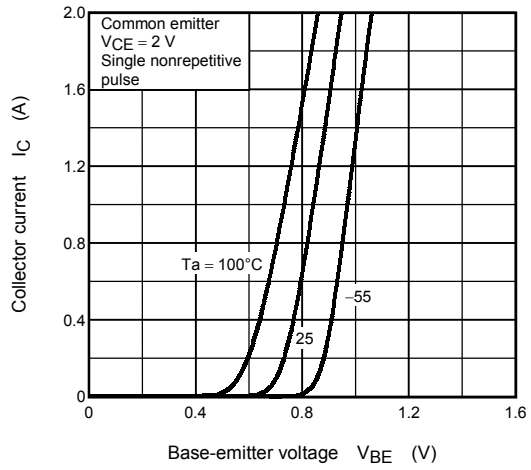

Transient Thermal Resistance $r_{th} - t_w$

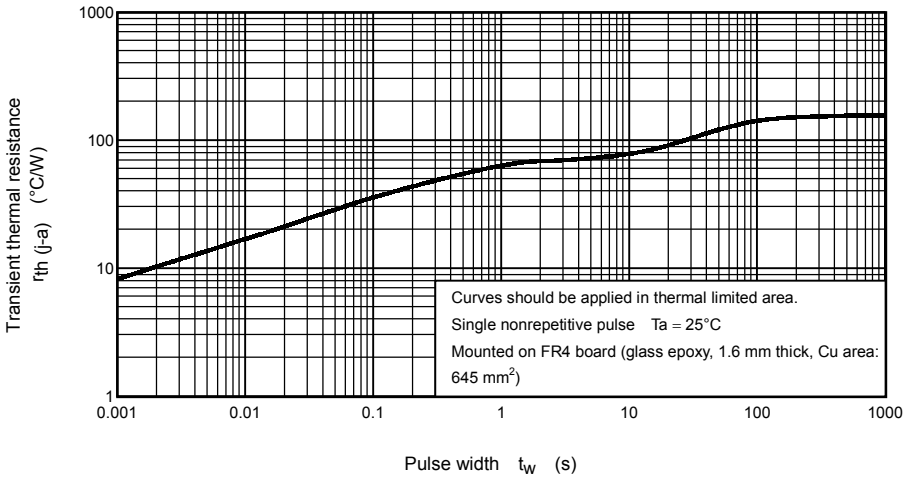

Safe Operating Area

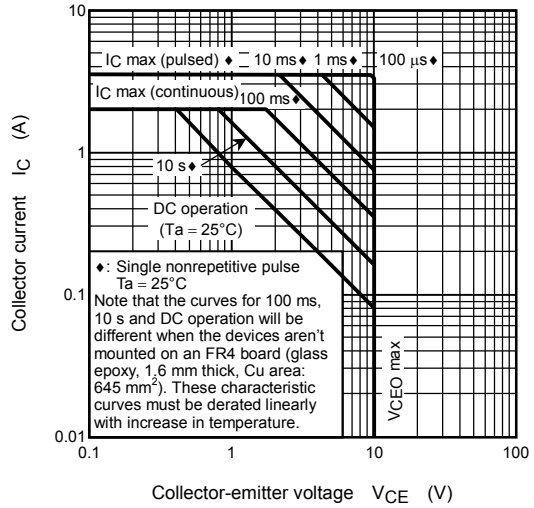

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the “Handling Guide for Semiconductor Devices,” or “TOSHIBA Semiconductor Reliability Handbook” etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury (“Unintended Usage”). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer’s own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.