


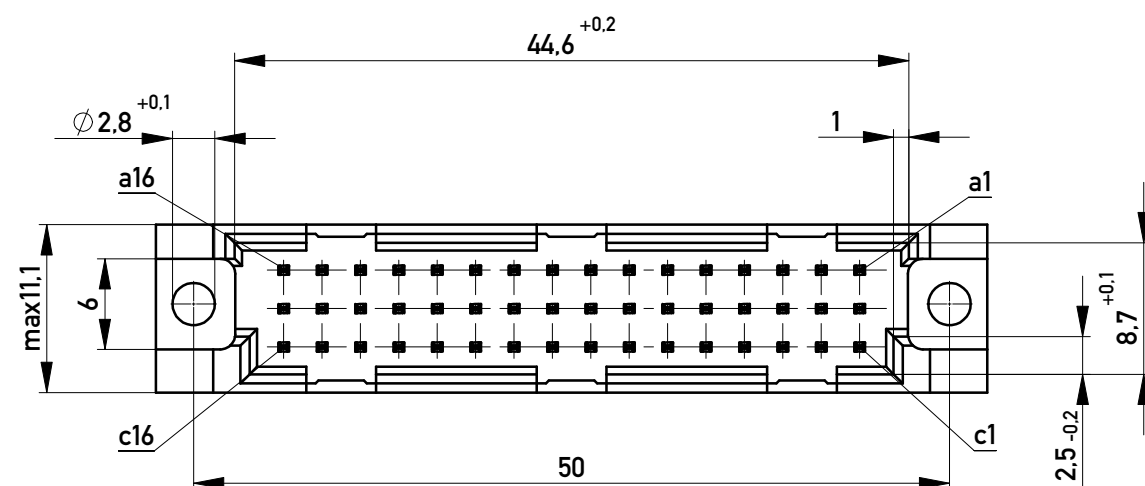
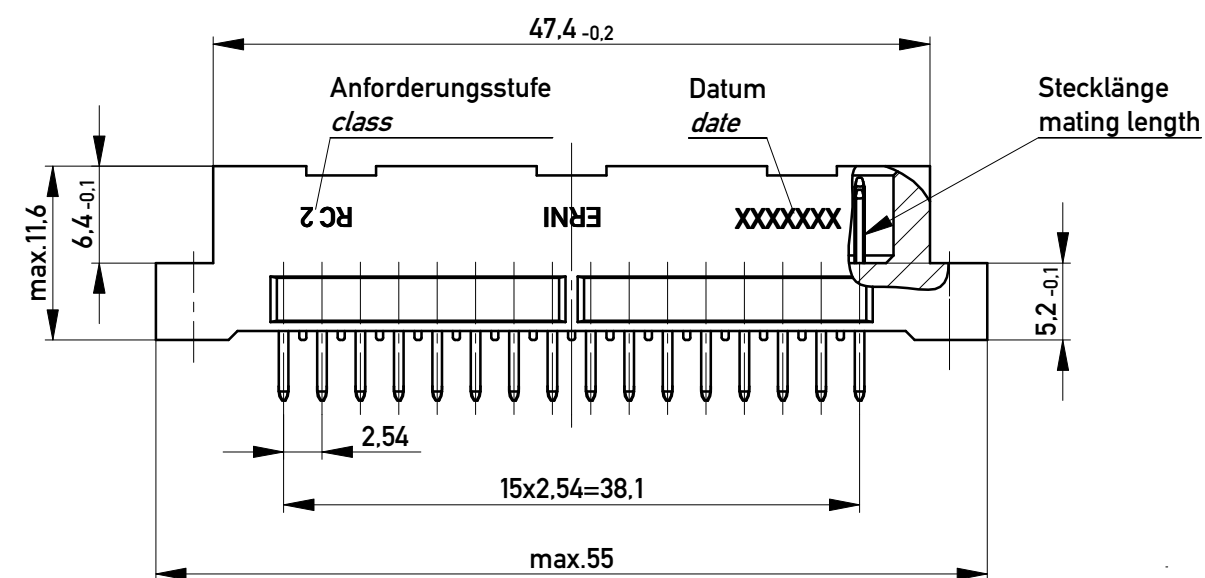
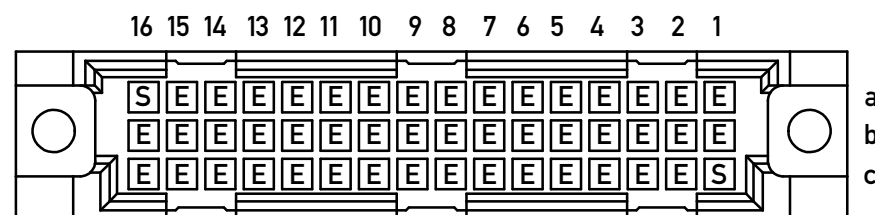


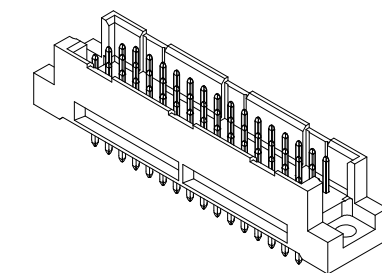


Bestückungsplan / *contact layout*

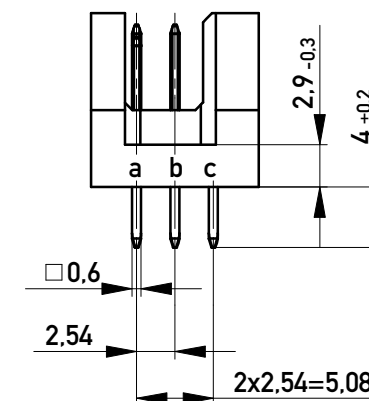

Leiterplatten-Lochbild / *PCB drillhole pattern*

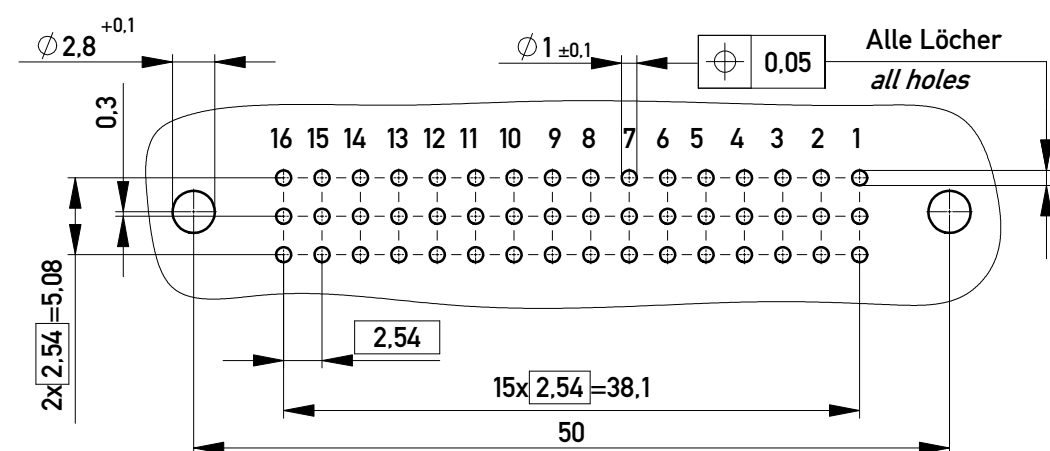

Stecklänge / *mating length*



E = *early mate, late break / voreilend*

S = *standard*

L = *late mate, early break / nacheilend*

Lötanschluss 0,6x0,6mm / *solder terminal 0,6x0,6mm*

Bauart 4 / *type 4*


Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*

Fehlende Maße und Angaben nach IEC 60 603-2 / *DIN EN 60 603-2*

Missing information and dimensions per IEC 60 603-2 / *DIN EN 60 603-2*

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Proprietary notice pursuant to ISO 16046 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale	2:1		
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.			Designation				
							Messerleiste R/2, 48 Löt <i>Male Connector R/2, 48 Löt</i>				
						www.ERNI.com		100804110001			I
Index								Class		STVR/2	
										A3	