

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/28/10	

6

5

4




3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

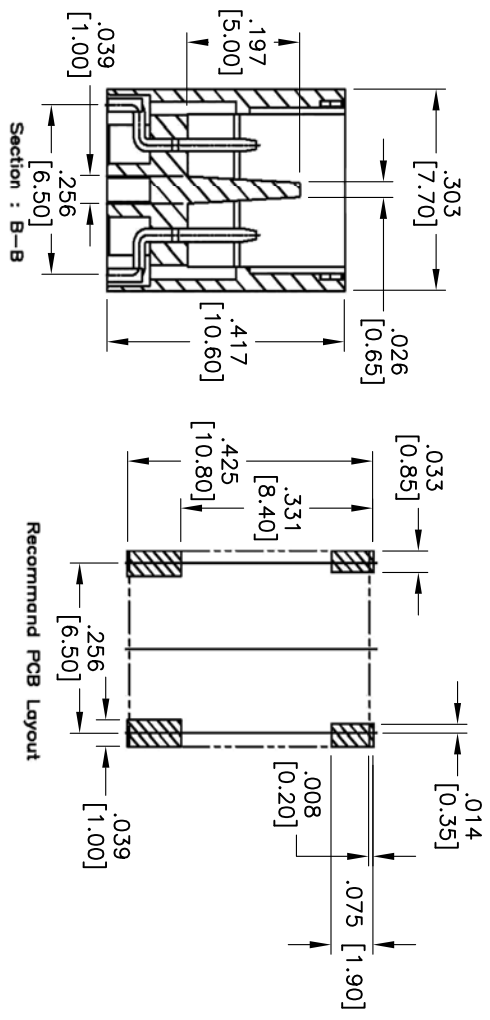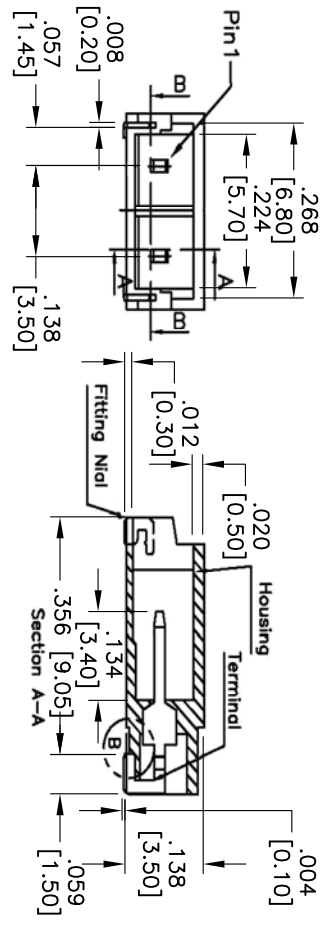

**SPECIFICATIONS:**

Material: Insulator: Nylon 9T, rated UL 94V-0

Insulator color: Beige

Contact: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 1400V AC/DC

Current rating: 1 Amp AC/DC

Contact Resistance: 20M ohms max.

Insulation resistance: 1,000Mohms min.

Withstanding Voltage: 3800V AC/minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

Recommended Soldering 235°C for 5 sec.



**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: JST BHS 3.5MM WAFER 2P, RIGHT ANGLE  
 SMT TYPE, TIN PLATED, COLOR BEIGE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN DY	10/28/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	35SH-02-T-SMT	-
REF: S00099T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1