


SDHT CONNECTOR

Emboss Tape

1.1mm pitch / For Micro SD card Push-Pull type

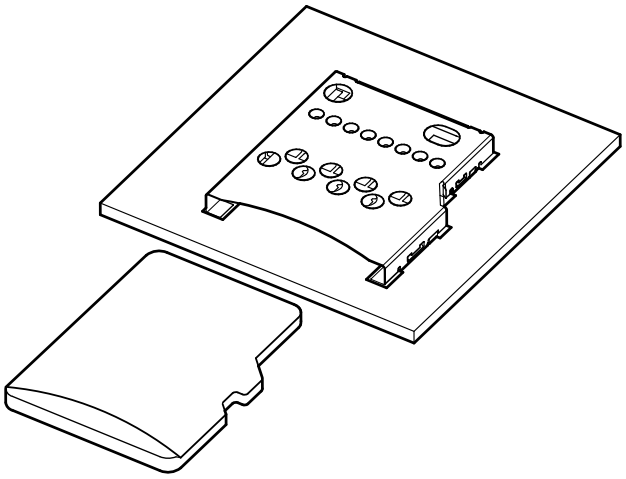


This is a space saving and Push-pull type connector for Micro SD card.

Specifications

- Current rating: 0.5 A AC/DC
- Voltage rating: 15 V AC/DC
- Temperature range: -25℃ to +85℃
  (including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 100 mΩ max.
  After environmental tests/ 150 mΩ max.
- Insulation resistance: Initial/100 MΩ min.
- Withstanding cvoltage: 500 VAC/minute
- Applicable card: Micro SD card

* In using the products,refer to "Handling Precaution for Terminal and Connector" described on our website (Technical documents of Product information page)
* Contact JST for details.
* RoHS2 compliance.

Connector

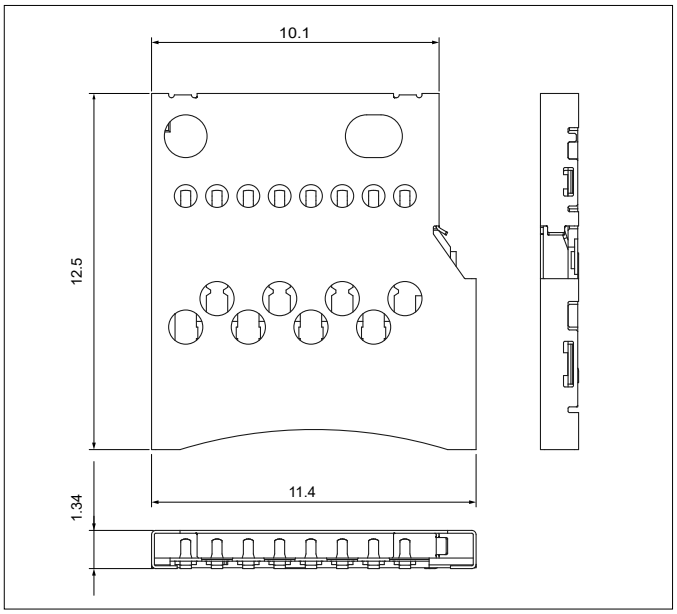


Model No.	Q'ty/reel
SDHT-8BNS-K-307-TB(HF)	2,700

Material and Finish

Contact: Copper alloy, nickel-undercoated, gold-plated
Housing: Heat-resistant resin, black
Cover: Stainless, gold-plated

RoHS2 compliance
Note: The product listed above is supplied on embossed-tape.

PC board layout

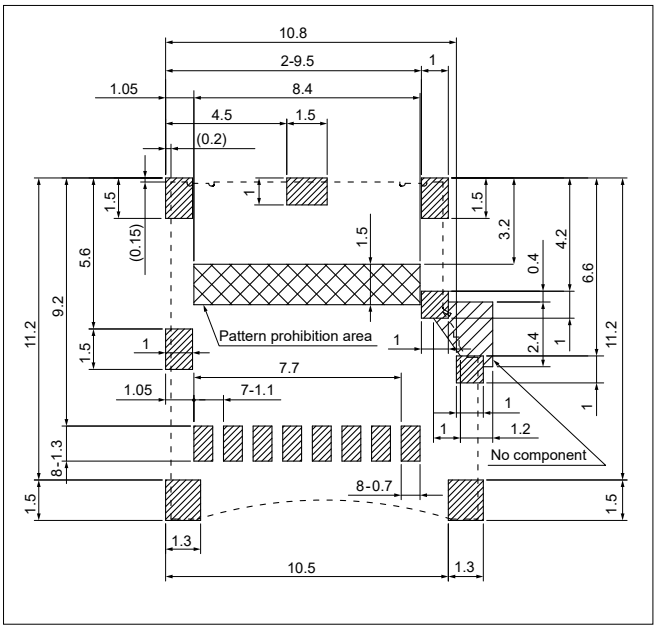

Note: 1. The above figure is the figure viewed from the connector mounting side.
2. Tolerances are non-cumulative: 0.05 mm for all centers.
The dimensions above should serve as a guideline.
Contact JST for details.