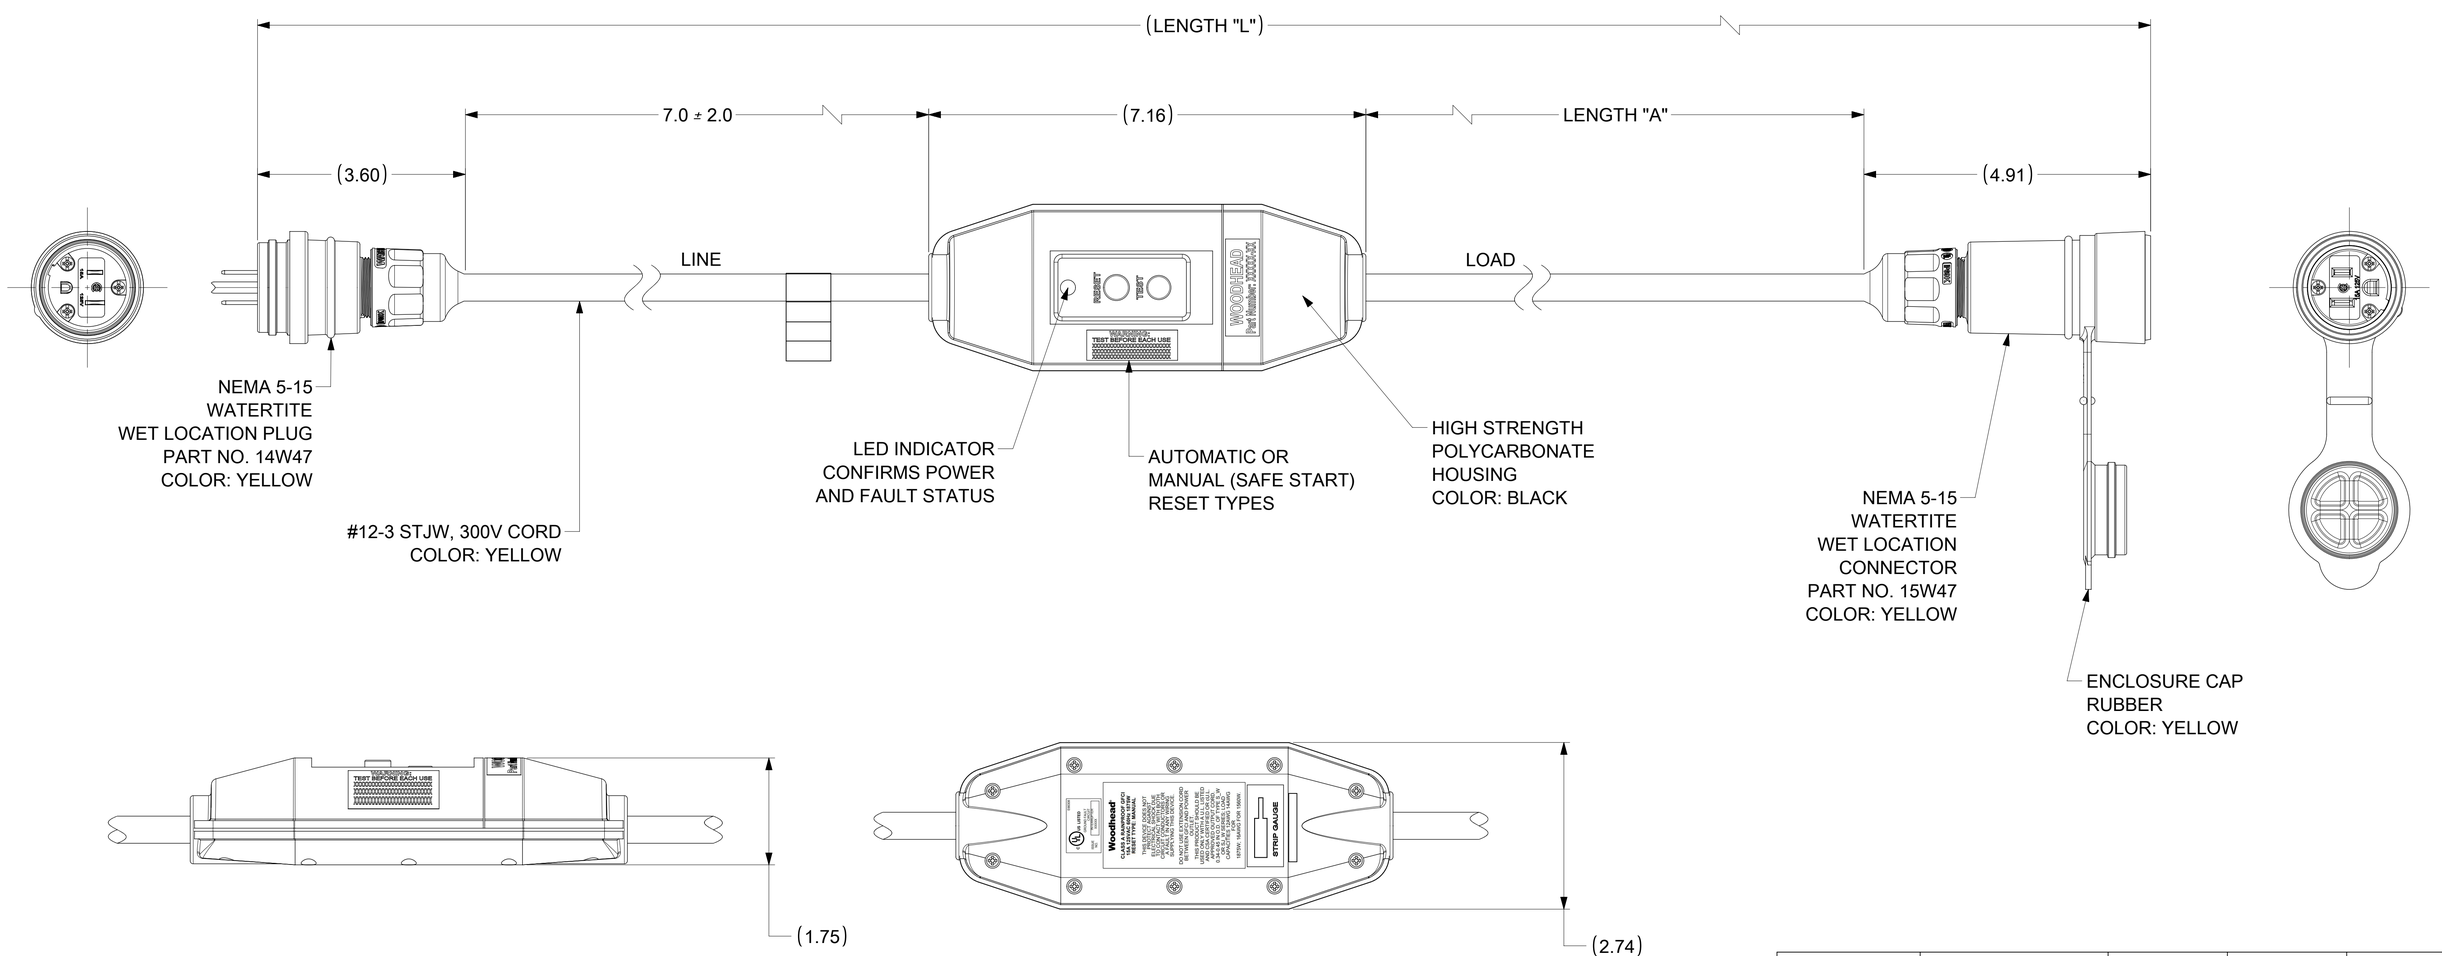


MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530056	15052-1A	2 FT 8 IN	1 FT ± 1 IN	AUTO
1301530068	15052-6A	7 FT 8 IN	6 FT ± 2 IN	AUTO
1301530061	15052-25A	26 FT 8 IN	25 FT ± 2 IN	AUTO
1301530065	15052-50A	51 FT 8 IN	50 FT ± 4 IN	AUTO
1301530059	15052-1M	2 FT 8 IN	1 FT ± 1 IN	MANUAL
1301530070	15052-6M	7 FT 8 IN	6 FT ± 2 IN	MANUAL
1301530063	15052-25M	25 FT 8 IN	25 FT ± 2 IN	MANUAL
1301530066	15052-50M	50 FT 8 IN	50 FT ± 4 IN	MANUAL

TECHNICAL:

LISTED:	UL AND cUL
RATED SUPPLY VOLTAGE:	120 VAC
RATED CURRENT:	UP TO 15 AMPS OR CABLE RATING
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	90 AMP 125 VAC
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS

SYMBOLS	
A =	0
C =	0
D =	0
S =	0
=	0
F =	0
=	0
=	0
=	0

DIMENSION UNITS: INCH | SCALE: NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	± 0.005
2 PLACES	± 0.13	± 0.01
1 PLACE	± 0.25	± 0.02
0 PLACES	±	±
ANGULAR TOL	± 0.5 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

CURRENT REV DESC: MIGRATION TO ECTR/NX

EC NO: 629866

DRWN:	PPURSUTANDEL	2019/11/11
CHK'D:	DNGUYEN62	2020/01/09
APPR:	HKNEELAND	2020/02/05

INITIAL REVISION:

DRWN:	HRUIZ01	2013/02/07
APPR:	JFMURPHY	2015/04/20

THIRD ANGLE PROJECTION | DRAWING: D-SIZE | SERIES: 130153

molex

120V 15A INLINE GFCI
W/ 14W47 & 15W47 WATERTIGHT PLUG & CONN

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-130153-016	PSD	001	A1

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	NORTH SHORE SAFETY	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2020/02/05	18:23:45

Software: Engineering material for product
Revision: 19
Date: 2019/01/18