

FEATURES

- ▶ 4200VAC reinforced Insulation
- ▶ Insulation rated for 300VAC Working Voltage
- ▶ Medical Safety to UL/CSA/EN/IEC 60601-1 3rd Edition
- ▶ 2 MOOP rated
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully regulated Output Voltage
- ▶ Low Leakage Current
- ▶ Operating Temp. Range -40°C to +75 °C
- ▶ Input Filter meets EN 55022, class A and FCC, level A
- ▶ Overload Protection
- ▶ 2"x 1" shielded Metal Package
- ▶ 3 Years Product Warranty

NEW


PRODUCT OVERVIEW

The MINMAX MKW10M series is a new range of high performance DC/DC converter modules with a reinforced insulation system .The I/O- isolation voltage is specified for 4200VACrms.The product comes in a compact 2"x1" industry standard package. All 15 models features wide 2:1 input voltage range and fully regulated output voltage.The MKW10M DC/DC converters offer an economical solution for demanding applications in industrial and medical instrumentation requesting a certified supplementary or reinforced insulation system to comply with industrial or latest medical safety standards.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Reflected Ripple Current	Max. capacitive Load	Efficiency (typ.)	
			Max.	@Max. Load	@No Load			@Max. Load	
	VDC	VDC	mA	mA(typ.)	mA (typ.)	mA(typ.)	μF	%	
MKW10-12S05M	12 (9 ~ 18)	5	1600	877	30	100	1000	76	
MKW10-12S051M		5.1	1600	907				75	
MKW10-12S12M		12	835	1044				80	
MKW10-12D12M		±12	±417	1042				80	
MKW10-12D15M		±15	±333	1028			220#	81	
MKW10-24S05M	24 (18 ~ 36)	5	2000	541	20	50	1000	77	
MKW10-24S051M		5.1	2000	559				76	
MKW10-24S12M		12	835	516				470	81
MKW10-24D12M		±12	±417	516				220#	81
MKW10-24D15M		±15	±333	508			220#	82	
MKW10-48S05M	48 (36 ~ 75)	5	2000	271	10	25	1000	77	
MKW10-48S051M		5.1	2000	280				76	
MKW10-48S12M		12	835	258				470	81
MKW10-48D12M		±12	±417	258				220#	81
MKW10-48D15M		±15	±333	254			220#	82	

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	12V Input Models	7	8	9	
	24V Input Models	13	15	18	
	48V Input Models	30	33	36	
Under Voltage Shutdown	12V Input Models	---	---	8.5	
	24V Input Models	---	---	16	
	48V Input Models	---	---	34	
Short Circuit Input Power	All Models	---	---	3000	mW
Internal Power Dissipation		---	---	4000	mW
Conducted EMI		Compliance to EN 55022, class A and FCC part 15, class A			

E-mail:sales@minmax.com.tw Tel:886-6-2923150

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy	At 50% Load and Nominal Vin	---	---	±1.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±2.0	%
Line Regulation	Vin=Min. to Max.	---	±0.3	±0.5	%
Load Regulation	Io=15% to 100%	---	±0.5	±1.0	%
	Io=5% to 100%	---	±0.6	±1.2	%
Ripple & Noise (20MHz)	5V & 5.1V Output Models	---	75	100	mV _{P-P}
	Other Output Models	---	100	150	mV _{P-P}
Min.Load	No minimum Load Requirement				
Over Load Protection		120	150	---	%
Transient Recovery Time	25% Load Step Change	---	300	600	μsec
Transient Response Deviation		---	±3	±5	%
Temperature Coefficient		---	±0.02	±0.05	%/°C
Short Circuit Protection		Continuous			

Isolation, Safety Standards

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (reinforced)	60 Seconds	4200	---	---	VACrms
I/O Isolation Test Voltage	Flash tested for 1 Second	6000	---	---	V _{PK}
Leakage Current	240VAC, 60Hz	---	---	10	μA
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100KHz, 1V	---	60	80	pF
Safety Standards	cUL/UL60950-1, CSA C22.2 No. 60950-1-03				
	UL60601-1, CSA C22.2 No. 601-1,				
	IEC/EN 60950-1, IEC/EN 60601-1 3 rd Edition, 2 MOOP				
Approvals(Pending)	IEC60950-1 CB report, cUL/UL 60950-1 certificate				
	UL60601-1 UL certificate				

General Specifications


Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		120	150	180	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000	---	---	Hours

Input Fuse


12V Input Models	24V Input Models	48V Input Models
3000mA Slow-Blow Type	1500mA Slow-Blow Type	750mA Slow-Blow Type

Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+75	°C
Case Temperature		---	+95	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Altitude		---	4000	m
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

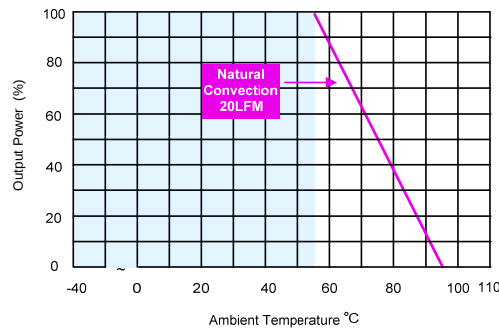Power Derating Curve

Notes

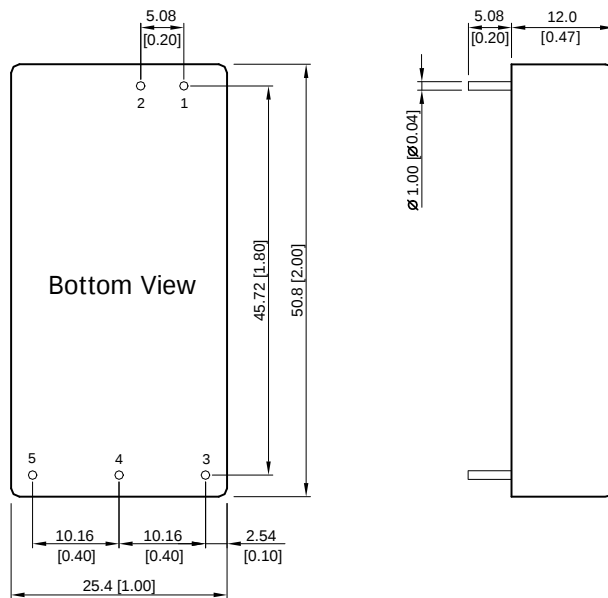- Specifications typical at $T_a = +25^{\circ}\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- Ripple & Noise measurement bandwidth is 0-20MHz.
- All DC/DC converters should be externally fused at the front end for protection.
- Other input and output voltage may be available, please contact factory.
- That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- Specifications are subject to change without notice.

Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Common
5	-Vout	-Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: $X.X \pm 0.25$ ($X.XX \pm 0.01$)
 $X.XX \pm 0.13$ ($X.XXX \pm 0.005$)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.05$ (0.04 ± 0.002)


Physical Characteristics

Case Size	: 50.8x25.4x12.0mm (2.0x1.0x0.47 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: 24.5g

Test Setup



Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} ($4.7\mu H$) and C_{in} ($220\mu F$, $ESR < 1.0\Omega$ at 100 KHz) to simulate source impedance. Capacitor C_{in} offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

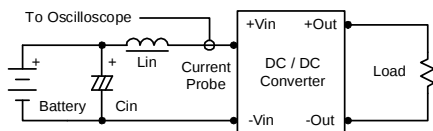

Peak-to-Peak Output Noise Measurement Test


Use a C_{out} $0.47\mu F$ ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

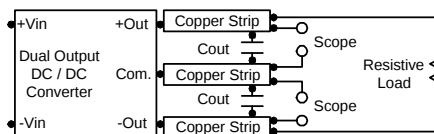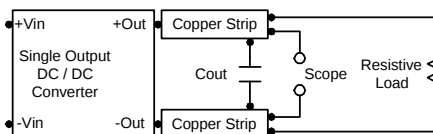

Technical Notes



Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. By using a good quality low Equivalent Series Resistance ($ESR < 1.0\Omega$ at 100 kHz) capacitor of a $10\mu F$ for the 12V input devices and a $4.7\mu F$ for the 24V input devices and a $2.2\mu F$ for the 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

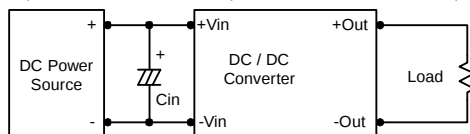

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use $3.3\mu F$ capacitors at the output.

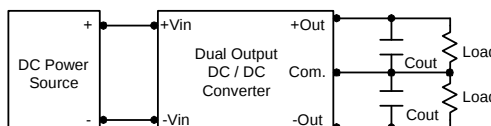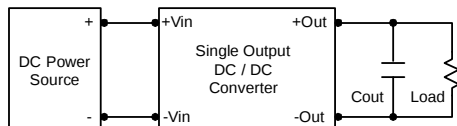

Maximum Capacitive Load

The MKW10M series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below $105^{\circ}C$. The derating curves are determined from measurements obtained in a test setup.

