

SMD Temperature Compensated Crystal Oscillator

SMD Temperature Compensated Crystal Oscillator for Stratum 3 applications.

Product description

The RFPT500 is based on Rakon's patented Pluto™ TCXO technology delivering industry leading performance. Tailored specifically to the requirements of Stratum 3 telecommunication applications the RFPT500 is a low cost solution which allows the system to be compliant with Belcore standards GR-253 and GR-1244. The standard package has 10 pads but 4 or 8 pad versions are available on request.



Applications

- IP timing
- Stratum 3
- Communications
- Other

Features

- Excellent holdover stability
- Exceptional free-running accuracy
- Very wide operating temperature range

Specifications

1.0 SPECIFICATION REFERENCES

Line	Parameter	Description
1.1	Model description	RFPT500
1.2	RoHS compliant	Yes. Part numbers with suffix `LF`
1.3	Package size available	7.0mm x 5.0mm

2.0 FREQUENCY CHARACTERISTICS

Line	Parameter	Test Condition	Value	Unit
2.1	Frequency range	Frequency range available 10-30MHz. Standard frequencies 12.8 and 20MHz	10 to 30	MHz
2.2	Holdover stability, temperature	Reference (Fmax+Fmin)/2. ±0.14 or ±0.28ppm maximum. Refer to note 1	±0.14 to 0.28	ppm
2.3	Holdover stability, 24 hour drift	24 hours, at constant temperature after 48 hours operation	±40 max	ppb/day
2.4	Max. slope (ΔF/ΔT) over temperature	Available upon request		
2.5	Temperature range		-40 to 85	°C
2.6	Free-run accuracy	Inclusive of calibration tolerance at 25°C, temperature, supply voltage 3.3V±5%, load 15pF±5pF, reflow soldering and ageing 20 years	±4.6 max	ppm
2.7	Supply voltage stability	±5% variation in supply voltage at 25°C	±0.1 max	ppm

3.0 POWER SUPPLY

Line	Parameter	Test Condition	Value	Unit
3.1	Supply voltage, Vs	Nominal supply voltage range (nominal value needs to be specified, standard values are 3.3V and 5V±5%)	2.5 to 6	V
3.2	Current	Load 15pF, depending on frequency	3 to 8	mA

4.0 VOLTAGE CONTROL

Line	Parameter	Description
4.1	Voltage Control	Fixed frequency is standard for the RFPT500 series but voltage control is available

5.0 OSCILLATOR OUTPUT- HCMOS

Line	Parameter	Test Condition	Value	Unit
5.1	Output waveform	HCMOS (other types available upon request)		
5.2	Output voltage low level		0.1 max	Vs
5.3	Output voltage high level		0.9 min	Vs
5.4	Output load	Nominal load 15pF	10 to 20	pF
5.5	Duty cycle	At 50%	45 to 55	%
5.6	Rise and fall time	tr, tf (for 3.3V HCMOS output with 15pF load). 10 to 90%	8 max	ns

6.0 SSB PHASE NOISE

Line	Parameter	Test Condition	Value	Unit
6.1	SSB phase noise power density at 1Hz offset	Typical values for a 12.8MHz oscillator at 25°C	-65	dBc/Hz
6.2	SSB phase noise power density at 10Hz offset	Typical values for a 12.8MHz oscillator at 25°C	-95	dBc/Hz
6.3	SSB phase noise power density at 100Hz offset	Typical values for a 12.8MHz oscillator at 25°C	-120	dBc/Hz
6.4	SSB phase noise power density at 1kHz offset	Typical values for a 12.8MHz oscillator at 25°C	-130	dBc/Hz
6.5	SSB phase noise power density at 10kHz offset	Typical values for a 12.8MHz oscillator at 25°C	-140	dBc/Hz
6.6	SSB phase noise power density at 100kHz offset	Typical values for a 12.8MHz oscillator at 25°C	-145	dBc/Hz

7.0 ENVIRONMENTAL

Line	Parameter	Description
7.1	Vibration	IEC 60068-2-6, test Fc, 10-60Hz 1.5mm displacement, 60-2000Hz at 10gn, 30 minutes in each of three mutually perpendicular axes at 1 octave per minute
7.2	Shock	IEC 60068-2-27, test Ea: 1500gn acceleration for 0.5ms duration, half-sine pulse, 3 shocks in each direction along three mutually perpendicular axes
7.3	Soldering	SMD product suitable for reflow soldering. Peak temperature 260°C. Maximum time above 220°C, 60s
7.4	RoHS	Parts are fully compliant with the European Union directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment. Note these RoHS compliant parts are suitable for assembly using both lead-free solders and tin/lead solders
7.5	Storage temperature range	-55 to 125°C
7.6	Humidity	85% for 48 hours at 85°C, non-condensing

8.0 MARKING

Line	Parameter	Description
8.1	Type	Laser marked
8.2	Line 1	R and manufacturing identifier (XXX) (refer to model drawing)
8.3	Line 2	Pad 1 / static sensitivity identifier (Δ), abbreviated part number (0000), device date code (YW) (refer to model drawing)

9.0 PIN CONNECTIONS

Line	Parameter	Description
9.1	Pin 1	Do not connect
9.2	Pin 2	NC
9.3	Pin 3	Do not connect
9.4	Pin 4	GND
9.5	Pin 5	RF Output
9.6	Pin 6	NC
9.7	Pin 7	NC
9.8	Pin 8	Tri-state control (Enable)*
9.9	Pin 9	Supply, +Vs
9.10	Pin 10	Do not connect
9.11	*	Leave unconnected if not required

10.0 MANUFACTURING INFORMATION

Line	Parameter	Description
10.1	Reflow	Solder reflow processes as per diagram (reflow profile). Solderability: MIL-STD-202, method 208, category 3
10.2	Packaging description	Part number with suffix 'T' will be supplied on tape and reel

11.0 TRISTATE CONTROL


Line	Parameter	Description
11.1	Output enabled	Pad 8 open circuit or $\geq 0.6V_s$. Output enabled
11.2	Output in tristate mode	Pad 8 $\leq 0.2V_s$. Output high impedance. Note 2

12.0 NOTES


Line	Parameter	Description
12.1	Note 1	$\pm 0.14\text{ppm}$ over -40 to 85°C may not be available at all frequencies
12.2	Note 2	In tristate mode the output stage is disabled but the oscillator and compensation circuit are still active (current consumption approximately 1mA)

Drawing Name: RFPT500 Model Drawing


MODEL DRAWING

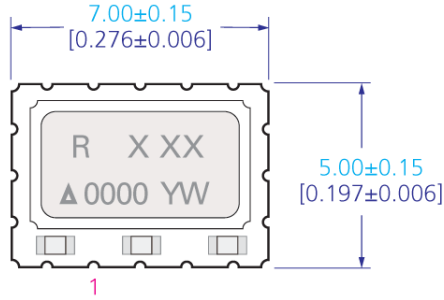


TOP VIEW

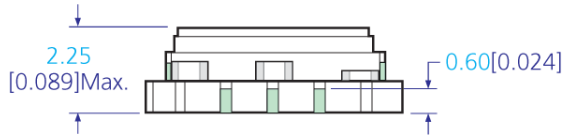

SIDE VIEW




END VIEW

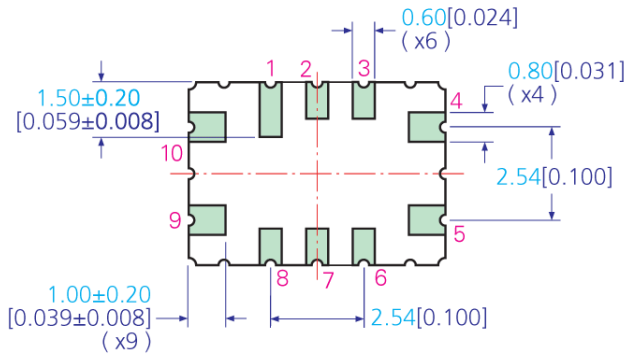

BOTTOM VIEW

NOTE: Pin connections are detailed in the specification

RECOMMENDED PAD LAYOUT - TOP VIEW

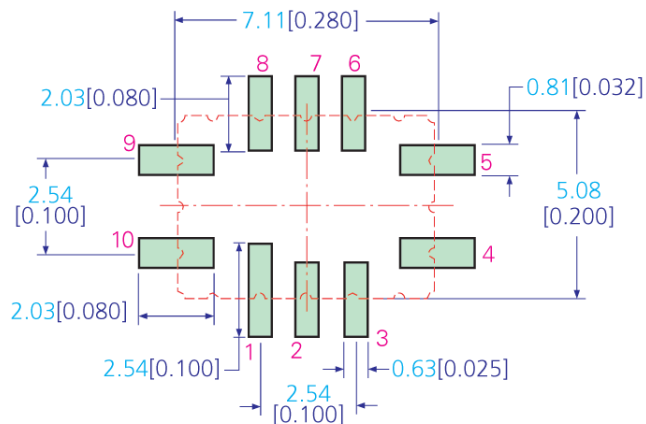

TITLE: RFPT500 MODEL OUTLINE DRAWING

FILENAME: RFPT500_MD

RELATED DRAWINGS:

REVISION: A

DATE: 22-Jul-10

SCALE: 5 : 1

Millimeters [inch]

Tolerance:

XX = ±0.5

X.X = ±0.2

X.XX = ±0.10

X.XXX = ±0.05

X° = ±1.0°


Hole = ±0.10

rakon

©2009 Rakon Limited

Drawing Name: RFPT500 Series Reflow Profile

Pb-Free Reflow Soldering Profile *

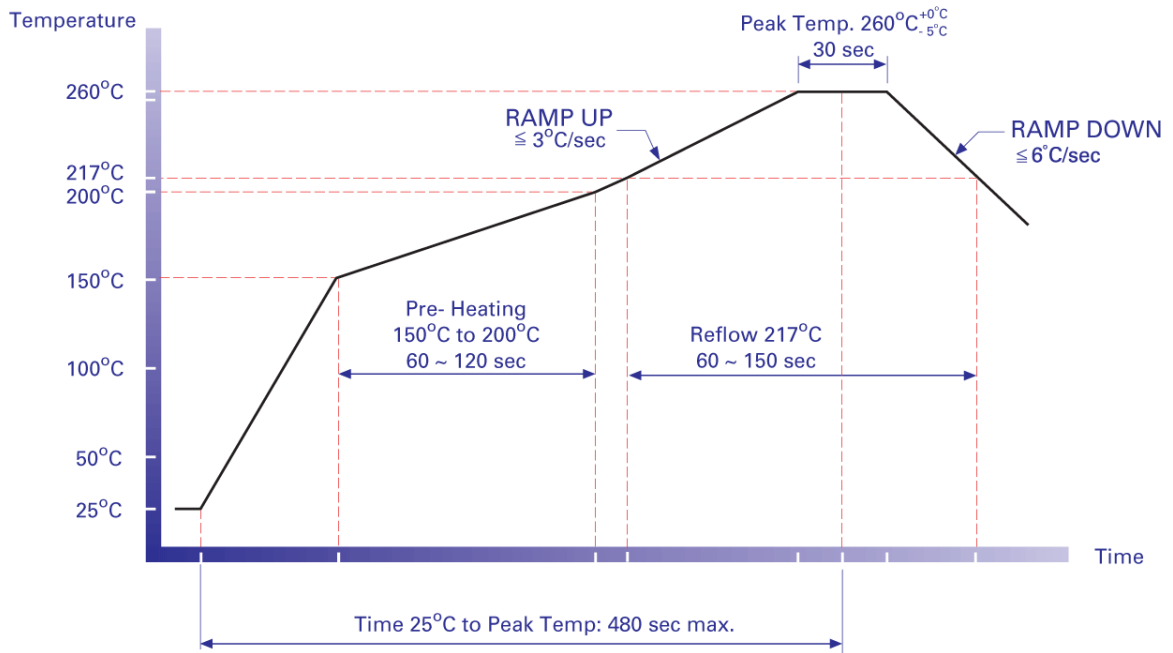

*** NOTE:**

This profile was used during the qualification testing of the product and therefore represents worst case conditions. It is not recommended for use by the customer in the actual assembly of these parts.

TITLE: RFPT500 SERIES REFLOW PROFILE

FILENAME: RFPT500_RF

RELATED DRAWINGS:

REVISION: B

DATE: 09-Sep-10

SCALE: NTS

Millimeters [inch]

Tolerance:

XX = ±0.5

X.X = ±0.2

X.XX = ±0.10

X.XXX = ±0.05

X° = ±1.0°

Hole = ±0.10

rakon

©2009 Rakon Limited