






XO5160 Series

14 pin DIP, 5.0 Volt, HCMOS/TTL, OCXO



- Standard DIP/DIL package offering tight stabilities, fast warm-up, and low current
- Ideal for PCS base stations, cellular base stations, phase locking, and SAR/SAT applications

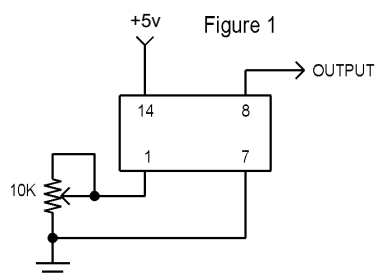

Ordering Information

	XO5160	A	R1	-R	00.0000 MHz
Product Series					
Stability/ Temperature					
A:	±0.075 ppm, 0°C to +60°C				
B:	±0.15 ppm, -20°C to +70°C				
C:	±0.25 ppm, -40°C to +85°C				
Frequency Adjustment Method:					
R1:	External Resistor Adjust (See Figure 1)				
V5:	Voltage Adjust (See Figure 2)				
RoHS Compliance					
Blank:	non-RoHS compliant part				
-R:	RoHS compliant part				
Frequency (Customer Specified)					

Pin Connections

PIN	FUNCTION
1	Frequency Adjust
7	Case ground & supply return
8	R.F. Output
14	Supply (+)

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition
Frequency Range	F	10	20		MHz	
Operating Temperature	T _A	(See Ordering Information)			°C	
Stability Over Temperature	ΔF/F	(See Ordering Information)			ppm	
Short Term Stability				5 x 10 ⁻¹¹		0.1 to 30 secs.
Aging (First Year)				±0.7	ppm	
Aging (10 Years)				±4.0	ppm	
Frequency vs. Supply				±0.1	ppm	
Frequency vs. Load				±0.01	ppm	
Supply Voltage	V _{cc}	+4.8		+5.2	Volts	
Warm-Up Time		To spec after 30 secs.				0°C
Warm-Up Current				250	mA	After 10 secs.
Supply Current	I _{cc}			70	mA	+30°C
				110	mA	-20°C
Output Signal						HCMOS/TTL Compatible
Rise/Fall Time	T _r /T _f			7	ns	Ref. 10% and 90%
Logic "0" Level	V _{ol}			0.4	Volts	
Logic "1" Level	V _{oh}	V _{cc} - 0.5			Volts	
Symmetry	Sym			40/60	%	Ref. To ½ V _{cc}
Output Load				15 pf HCMOS 10 LS TTL		
Frequency Adjustment (Pin 1)		±4			ppm	See Figure 1 or 2
Tuning Slope		Positive				
Input Impedance (Pin 1)		4.7 K			ohms	
Phase Noise						(BW = 1 Hz) Offset from carrier
1 Hz			-70		dBc/Hz	
10 Hz			-100		dBc/Hz	
100 Hz			-130		dBc/Hz	
1 kHz			-140		dBc/Hz	
Environmental	Mechanical Shock	2000 g, 0.3 mS, ½ sine				
	Vibration	2000 Hz, 10 g				
	Storage Temperature	-55°C to +125°C				
	Hermeticity	Per MIL-STD-202, Method 112				
	Solderability	EIAJ-STD-002				

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

Revision: 03-05-07

MtronPTI Lead Free Solder Profile

