

DB101 THRU DB107
DF005 THRU DF10

VOLTAGE RANGE
CURRENT

50 to 1000 Volts
1.0 Ampere

FEATURES


- Glass passivated chip junction.
- High forward surge current capability
- Ideal for printed circuit board
- High temperature soldering guaranteed:
260°C/10 seconds at 5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V - 0 rate flame retardant.
- Terminal: Lead solderable per MIL - STD - 202E method 208C
- Polarity: Molded on body
- Mounting position : Any
- Weight: 0.04 ounce, 1.0 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%

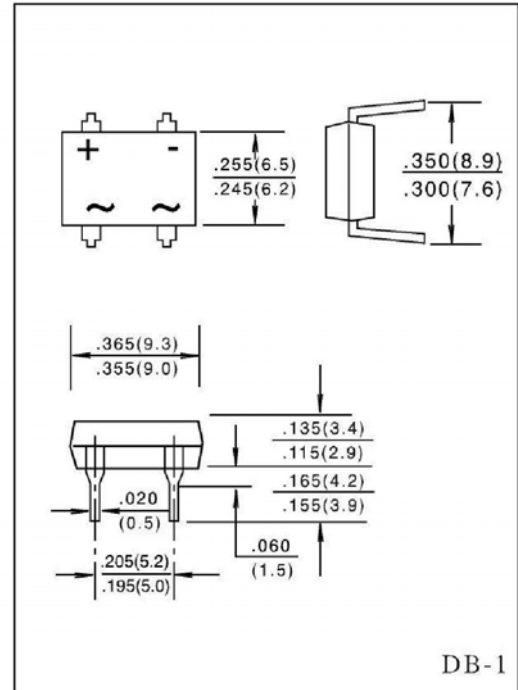

	SYMBOLS	DF005	DF01	DF02	DF04	DF06	DF08	DF10	UNIT
		DB101	DB102	DB103	DB104	DB105	DB106	DB107	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, 0.06" (0.5mm) lead length at $T_A = 40^\circ C$ (Note)	$I_{(AV)}$	1.0							Amp
Peak Forward Surge Current 8.3ms single half sine - wave superimposed on rated load (JEDEC method)	I_{FSM}	50							Amps
Rating for Fusing ($t < 8.3ms$)	I^2t	10							A^2s
Maximum Instantaneous Forward Voltage Drop per bridge element at 0.5A	V_F	1.10							Volts
Maximum DC Reverse Current at rated DC blocking voltage per element	I_R	$T_A = 25^\circ C$							μA
		$T_A = 125^\circ C$							mA
Typical Junction Capacitance (Note 1)	C_j	25							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	40							$^\circ C/W$
Operating and Storage Temperature Range	T_J, T_{STG}	(-65 to +150)							$^\circ C$

NOTES:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
2. Unit mounted on P.C.B. with 0.51" X 0.51" (13 X 13 mm) copper pads

FIG.1-DERATING CURVE FOR
OUTPUT RECTIFIED CURRENT

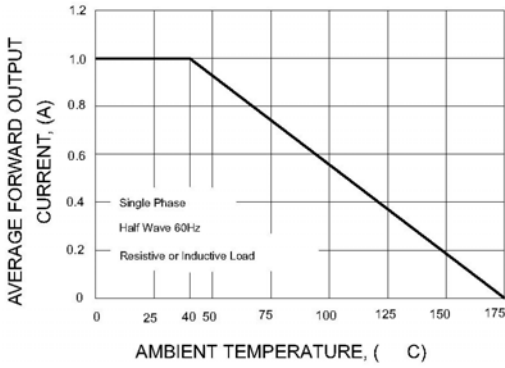


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT PER ELEMENT

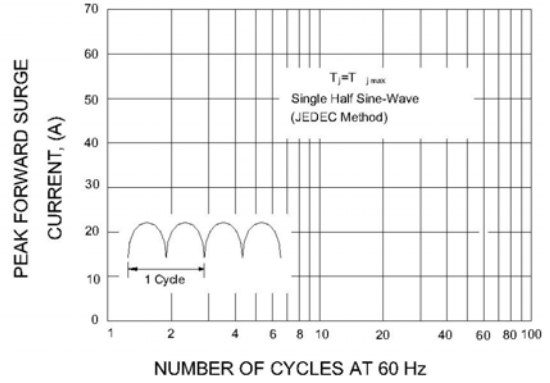


FIG.3-TYPICAL FORWARD CHARACTERISTICS
PER BRIDGE ELEMENT

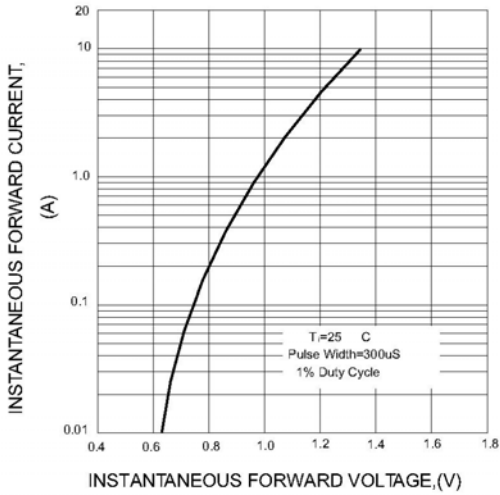


FIG.4-TYPICAL REVERSE CHARACTERISTICS
PER BRIDGE ELEMENT

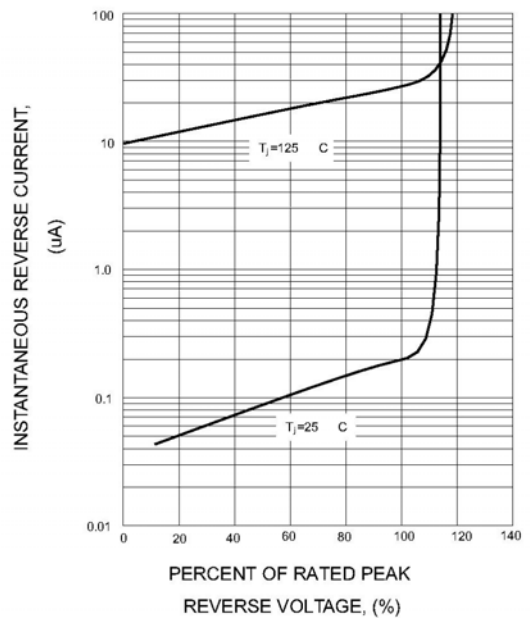


FIG.5-TYPICAL JUNCTION CAPACITANCE
PER BRIDGE ELEMENT

