
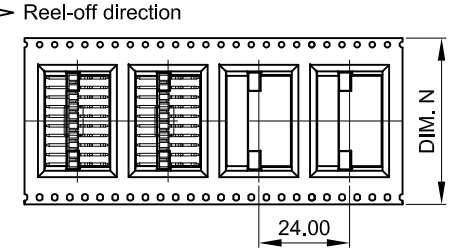


Tape & Reel packaging (with Pick and Place Cap) 250pcs per reel



Tube Packaging Q'ty

20	22
18	25
16	28
14	32
12	38
10	45
8	57
6	76
4	114
No. of positions	Q'ty per tube

Notes:

Material and finish:

Contact: Brass

Gold over 30~80u" nickel plating

Insulation: PA9T UL94-V0, color black

Specifications:


Current rating: 3.0A

Contact resistance: 20mΩ Max.

Withstanding Voltage: 1000V AC/DC

Insulation resistance: 1000MΩ Min.

Operating temperature: -40°C to +105°C

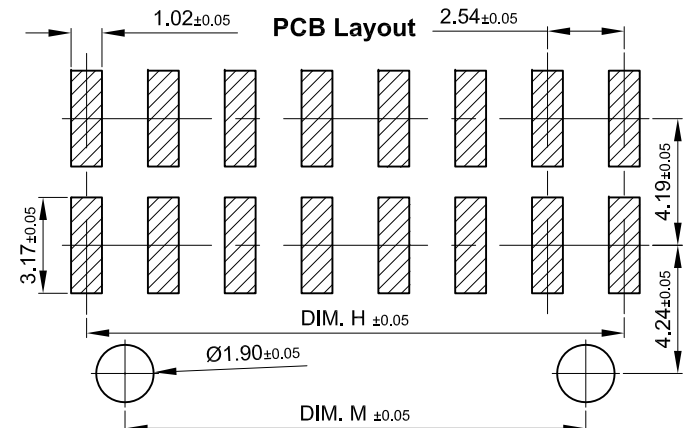

129094	129085	129076	129067	20	25.40	22.86	20.32	44
129093	129084	129075	129066	18	22.86	20.32	17.78	44
129092	129083	129074	129065	16	20.32	17.78	15.24	44
129091	129082	129073	129064	14	17.78	15.24	12.70	44
129090	129081	129072	129063	12	15.24	12.70	10.16	32
129089	129080	129071	129062	10	12.70	10.16	7.62	32
129088	129079	129070	129061	8	10.16	7.62	5.08	24
129087	129078	129069	129060	6	7.62	5.08	2.54	24
129086	129077	129068	129059	4	5.08	2.54	0.00	24
Id-Nr. Tape&Reel 10u" gold plating	Id-Nr. Tube 10u" gold plating	Id-Nr. Tape&Reel 0.8u" gold plating	Id-Nr. Tube 0.8u" gold plating	No of Pos.	DIM. G	DIM. H	DIM. M	DIM. N

Information:		Tolerances X, ±0.50 X*, ±10° X.X ±0.40 X.X* ±5° X.XX ±0.25 X.XX* ±3°	Scale 4:1
All rights reserved. Only for information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using		Subject to modification without prior notice. Drawing will not be updated.	For further information about I. D. number see manufacturing document
ERNI ERNI Asia Holding www.erni.com		Designation 2.54mm R/A Dual Row Header SMT With Locating Pegs	
A		129058	
Rev.	Date	129058.DWG	