


Dual Channel Input/Output Isolators 15-RACK**SIGNAL CONVERTER**

(high speed response)

Functions & Features

- Converting a DC input into a standard process signal
- 2 channels available; accomplishing economical and space-saving multi-input processing

**MODEL: 15VF-[1]6-R[2]****ORDERING INFORMATION**

- Code number: 15VF-[1]6-R[2]

Specify a code from below for each [1] and [2].
(e.g. 15VF-46-R/Q)

- Special input range (For code 0)
- Specify the specification for option code /Q (e.g. /C01)

[1] INPUT**Current**

A: 4 - 20 mA DC (Input resistance 250 Ω)

D: 0 - 20 mA DC (Input resistance 50 Ω)

G: 0 - 1 mA DC (Input resistance 1000 Ω)

H: 10 - 50 mA DC (Input resistance 100 Ω)

Voltage

3: 0 - 1 V DC (Input resistance 1 MΩ min.)

4: 0 - 10 V DC (Input resistance 1 MΩ min.)

5: 0 - 5 V DC (Input resistance 1 MΩ min.)

6: 1 - 5 V DC (Input resistance 1 MΩ min.)

0: Specify voltage (See INPUT SPECIFICATIONS)

OUTPUT**Voltage**

6: 1 - 5 V DC (Load resistance 5000 Ω min.)

POWER INPUT**DC Power**

R: 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

[2] OPTIONS

blank: none

/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q

COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

RELATED PRODUCTS

- EXTENDER CARD (model:10EC)

Necessary to adjust span.

GENERAL SPECIFICATIONS

Construction: Rack-mounted; terminal access via screw terminals at the front and via card-edge connector at the rear; terminal cover provided

Connection

Input: M3.5 screw terminals (torque 0.8 N·m)

Output: Card-edge connector and M3.5 screw terminals (torque 0.8 N·m)

Power input: Supplied from card-edge connector

Screw terminal: Nickel-plated steel

Housing material: Flame-resistant resin (black)

Isolation: Input to output or power; ch.1 input to ch.2 input

Overrange output: Approx. -10 to +120 %

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (top)

INPUT SPECIFICATIONS

■ **DC Current:** Input resistor incorporated

• **DC Voltage:** 0 - 30 V DC

Minimum span: 1 V

Offset: Max. 1.5 times span

Input resistance: ≥ 1 MΩ

OUTPUT SPECIFICATIONS

With the input voltage code 3, 4, 5, 6 and current, the output goes below 0 % when the input is open.


INSTALLATION

Power consumption: Approx. 20 mA
Operating temperature: -5 to +55°C (23 to 131°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Mounting: Standard Rack 15BX
Weight: 180 g (0.40 lb)


PERFORMANCE in percentage of span

Accuracy: $\pm 0.1\%$
Temp. coefficient: $\pm 0.015\%/^{\circ}\text{C}$ ($\pm 0.008\%/^{\circ}\text{F}$)
Response time: ≤ 200 microseconds (0 - 90 %)
Line voltage effect: $\pm 0.1\%$ over voltage range
Insulation resistance: $\geq 100\ \text{M}\Omega$ with 500 V DC
Dielectric strength: 500 V AC @ 1 minute
 (input to output or power)
 500 V AC @ 1 minute (ch.1 to ch.2 input)
 500 V AC @ 1 minute (output to ground)

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

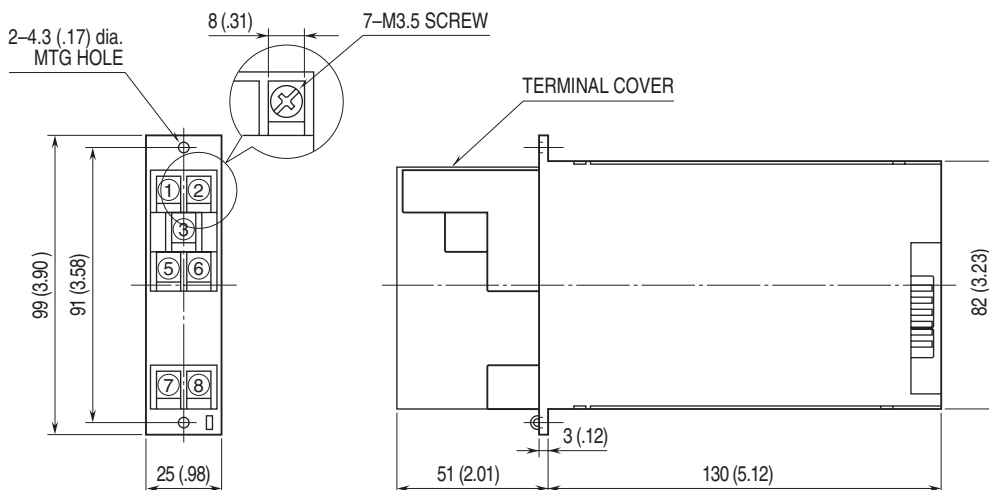

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

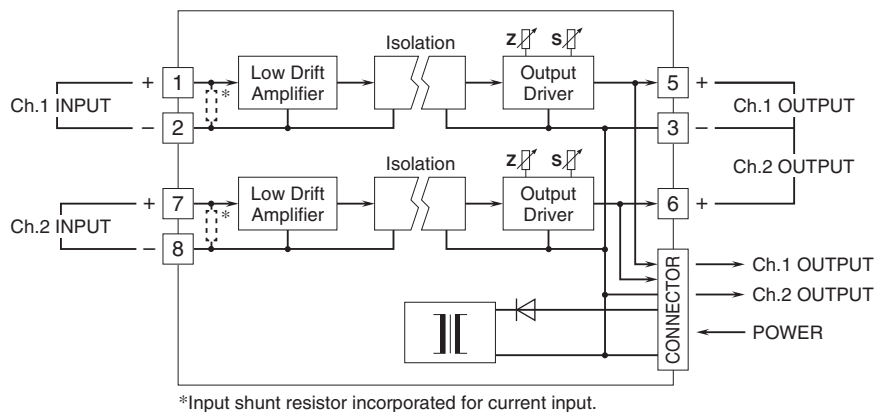



Specifications are subject to change without notice.