

# LD-101

## 10.1" Industrial Open Frame LCD Monitor



### Features

- Flexible, low cost and high performance
- For industrial, kiosk, gaming, digital signage application
- 10.1" WXGA TFT LCD display
- VESA mount



### Specifications

LCD panel *	Size	10.1" (16:9)
	Backlight	LED (15K hr min)
	Panel type	IPS
	Pixel pitch	0.1695x0.1695 mm
	Active area	216.96x135.6 mm
	Brightness *	350 nits (max.)
	Contrast	800 : 1
	Viewing angle	85/85/85/85 degree
	Resolution	1280 x 800
	Display color	16.7M (8 bit)
	Response time	Tr/Tf=11/5 mS
Video	Hor. frequency	30 ~ 56 KHz
	Ver. frequency	60/70 Hz
	Pixel rate	75 MHz

Signal input	VGA, DVI-I	
OSD adjustment	Power, Enter, Left, Right, Auto	
Power	DC connector	2.5mm diameter
	DC input	12 Vdc / 1A
	Consumption	12W
	Management	VESA DPMS
Mounting	75x75mm VESA mount	
Dimension	265 (W) x 145.5 (H) x 39 (D) mm	
Net weight		
Package	Packing	
	Carton size	
	Container loading	
Temperature	Operation **	-20 ~ 70 degree C
	Storage	-30 ~ 80 degree C

\* Different brightness is per customer's request

\*\* Temperature of LCD surface

\*\* Different temperature range is on demand.

### Ordering information


#### ■ Model selection

LD-101-XYZ	X: Panel selection	Y: Input selection	Z: Touch selection
0:	Standard, chosen	0: Standard, VGA/DVI	0: Standard, none
A:	Specified LCD	V: VGA only	G: Glass
B:	Specified LCD	H: VGA/DVI/HDMI	R: Resitive
...etc.	Specified LCD	P: DVI/HDMI/DP	C: Surface capacitive
		S: VGA/DVI/S-video	P: Projective capacitive
			I: IR
			S: SAW

#### ■ Optional accessories

- \* Power adapter      100 ~ 240 Vac adapter with 12Vdc / 3A o/p
- \* Power cord        1.8M power cord, US / EU
- \* Signal cable        1.8M VGA cable, 1.8M DVI cable

### Product drawing

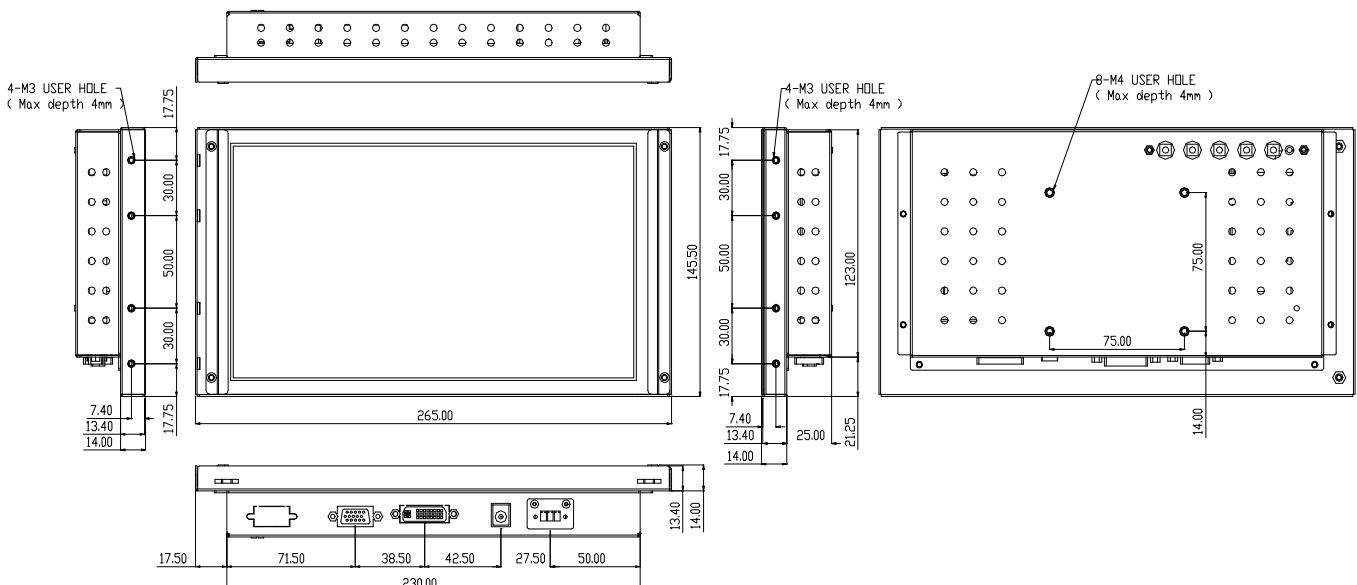

\* All specification and photos are subject to change without notice.