



SHEET 1 OF 1

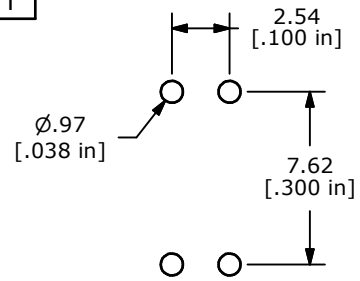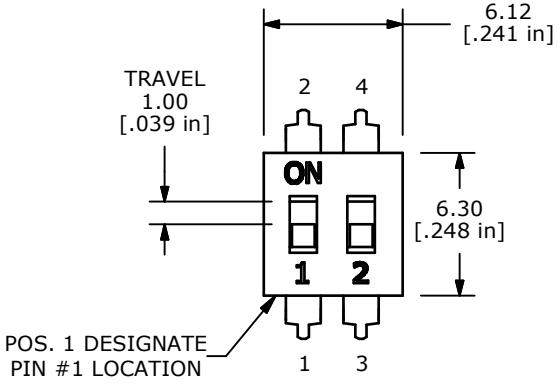



P.C.B. MOUNTING HOLES





▲ CIRCUIT - 2 POSITION




NOTES:
1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (SWITCH)
   100mA @50VDC. (CARRY)
▲5. CONTACT MATERIAL:
   CONTACTS: (MOVABLE) COPPER W/GOLD PLATE.
   TERMINALS: BRASS w/GOLD PLATE.
6. INSULATION RESISTANCE; 100 MΩ MIN. @500VDC.
7. CONTACT RESISTANCE; 50 mΩ MAX INITIAL.
8. OPERATING TEMP: -20˚C TO +85˚C.
9. STORAGE TEMP: -40˚C TO +85˚C.
10. ELECTRICAL LIFE: 2000 CYCLES.
▲11. PACKAGE: TUBE (76 PER TUBE)
   WITH ALL POLES IN THE "OFF" POSITION.
12. ▲DENOTES CRITICAL PARAMETER.
13. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE.
▲14. OPERATING FORCE: 1000 GRAMS MAX.
15. 2002/95/EC (ROHS) COMPLIANT.
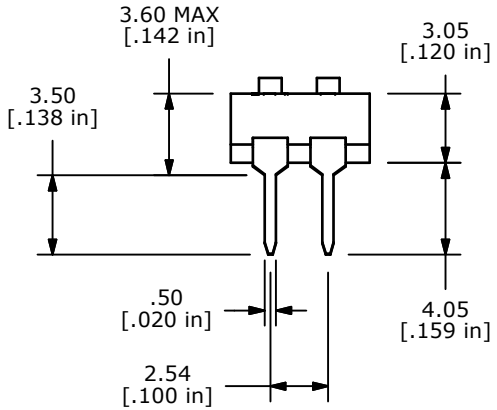
| REV | PCR NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| A | 20857 | RELEASED FOR PRODUCTION | 10/30/12 | EBP |

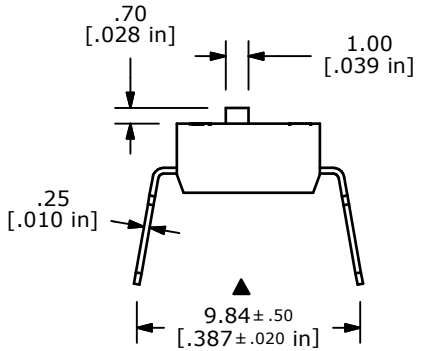*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E-SWITCH®

TITLE KAE02LAGT

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| | 10/30/2012 | EBP | N800002 | A |