


RECOMMENDED P.C.B. LAYOUT




SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
			
DN	DIFF	(DN)	
2-3	OPEN	2-1	

CIRCUIT: SPDT

() = Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
3. TERM. NDS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC;
2A @250VAC
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy W/Silver Plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @test level
9. OPERATING TEMP.: -30°C to $+85^{\circ}\text{C}$

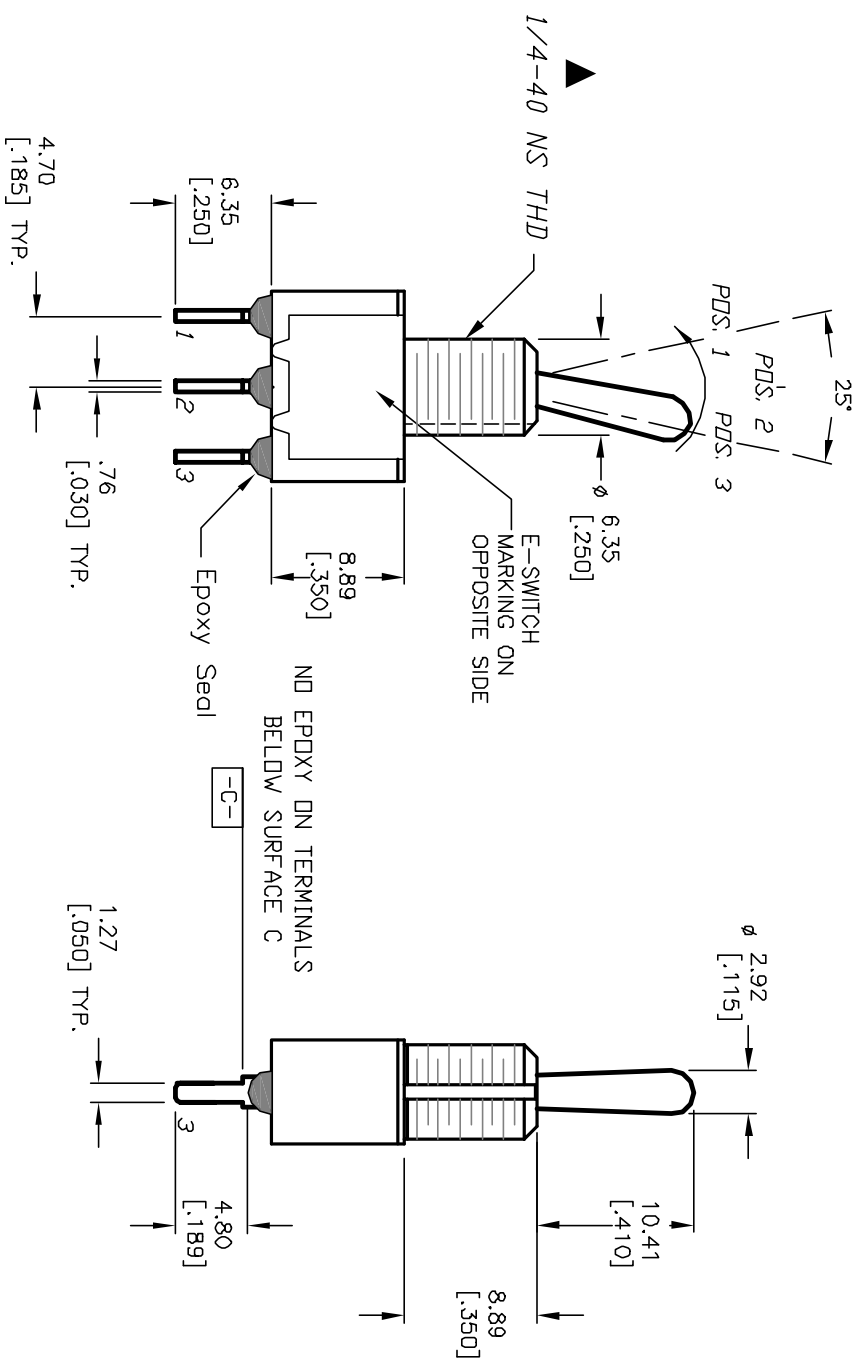**E-SWITCH®**

				TITLE		100 SP-5 T1 B1 M2 Q E	
B	12194	REVISED AND REDRAWN	6/4/02	CJB			
REV.	ECN NO.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
			SCALE	2:1	DATE	6/4/02	DR
						CJB	DWG
						T115003	REV
						B	