


RECOMMENDED P.C.B. LAYOUT






CIRCUIT: DPDT
CONTACT CONFIGURATION

▲ SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	OFF	DN
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4VA max. @20VAC or DC
5. FIXED TERM/MOVING CONTACT:
COPPER ALLOY w/GOLD PLATE OVER
Nickel plate.
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to $+85^{\circ}\text{C}$
10. ▲ DENOTES CRITICAL PARAMETER.

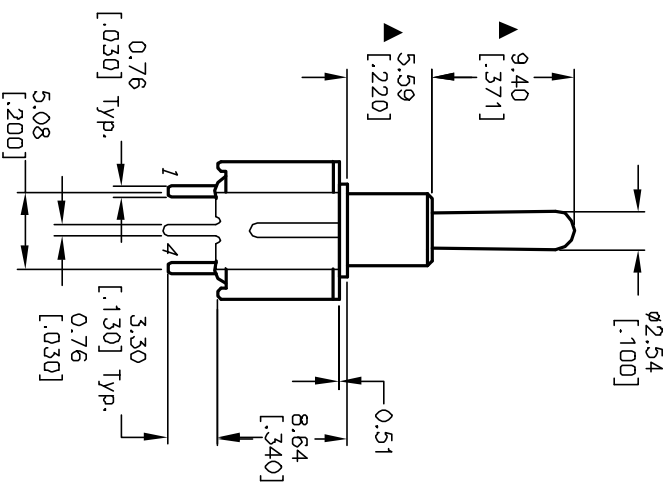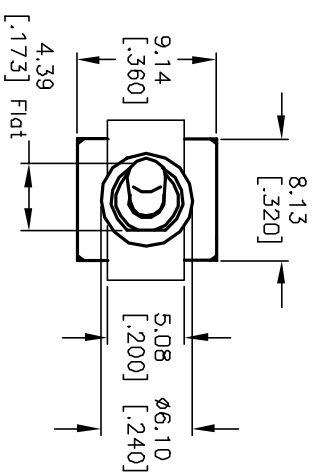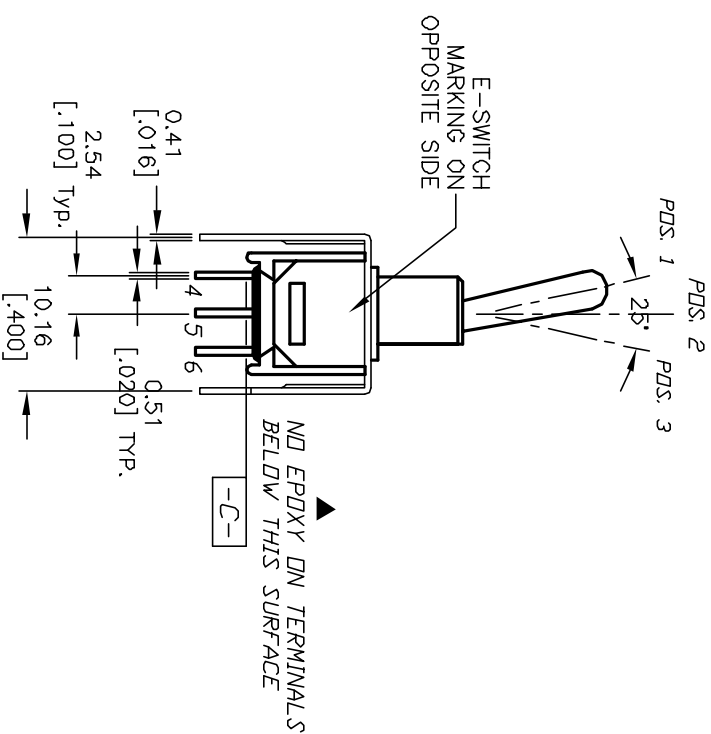

9. OPERATING TEMP.: -30°C to +85°C			
10. ▲ DENOTES CRITICAL PARAMETER.			
A	13222	RELEASED FOR PRODUCTION	6/17/03 AR
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
TITLE			
200MDP3T1B2VS2RE			
SCALE	DATE	DR	DWG
2:1	6/17/03	AR	T221052
			REV
			A